

lagoon® Advanced Care

WH6-20LAC and TD6-20LAC

The ideal replacement for any dry-cleaning operation



Features and benefits

**Keep customers coming back**

Outstanding results for garments of every type thanks to specialized detergents and dedicated programs

**Delicate on the delicates**

Gentle on fine textiles and wools labelled dry-clean only, as less mechanical action. Woolmark-approved

**Rapid return on investment**

With a better loading factor, less prespotting, easier finishing and faster process times

**Sustainable and eco-friendly**

Water-based cleaning with none of the disadvantages of PERC, which can be dangerous to staff

**Dry to dry in 1 hour**

Smart chemicals and processes mean garments are fully dried in the dryer - no hang-dry

Main specifications				WH6-20LAC
Rated capacity, Laundry	filling factor 1:9	kg		20
Wool	filling factor 1:15	kg		14
Silk	filling factor 1:18	kg		10
Drum, volume		litre		180
diameter		ø mm		725
Extraction		rpm		1055
G-factor				450
Heating alternative	electricity	kW		18.0
Consumption data "lagoon"				
Total time	Wool High	min		22
	Wool Medium	min		23
	Silk	min		16
	Synth. mix Medium	min		20
	Synth. mix Low	min		17
	Curtains	min		20
Water consumption (cold+hot)				
	Wool High	litre		110
	Wool Medium	litre		106
	Silk	litre		80
	Synth. mix Medium	litre		85
	Synth. mix Low	litre		80
	Curtains	litre		95
Energy consumption (motor/heating/water)				
	Wool High	kWh		0.15/1.0
	Wool Medium	kWh		0.15/1.0
	Silk	kWh		0.05/0.6
	Synth. mix Medium	kWh		0.15/1.0
	Synth. mix Low	kWh		0.05/0.95
	Curtains	kWh		0.05/0.7
Consumption data ECO 60 1:9*				
Total time		min		65
Water consumption (cold+hot)		litre		113+10
Energy consumption (motor/heating/hot water)		kWh		0.5/2.2/0.55
Residual moisture		%		45

* Water temperature 15°C cold water and 65°C hot water.

Main specifications				TD6-20LAC			
Rated capacity, Drying	filling factor 1:18	kg		20			
Drum, volume		litre		360			
diameter		ø mm		755			
Heating alternative	electricity	kW		18.0			
	gas	BTU/h (kW)		21.0			
	steam at 700 kPa			25.0			
	heat pump	kW		6.5			
Consumption data "lagoon"				El	Gas	Steam	Heat pump
Total time	Wool High*	min		26	25	22	31
	Wool Medium*	min		23	22	20	28
	Synthetic mix**	min		31	30	27	29
Consumption data***							
Total time		min		27	26	23	44
Energy consumption (motor/heating/hot water)		kWh		8.2	9.3	9.6	2.99
Evaporation		g/min		302	321	352	185
Energy/Water evaporation		kWh/l		1.00	1.13	1.17	0.36

* 1:30 load 100% wool load at 30% initial moisture dried to 0%.

** 1:40 load 100% synthetic load at 20% initial moisture dried to 0%.

*** At rated capacity 100% cotton load at 50% initial moisture dried to 0%.

Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-240V 3 ~	50/60	18.0	18.5	50
	380-415V 3N/3 ~	50/60	18.0	18.5	35
	440V 3 ~	60	18.0	18.5	25
	480V 3 ~	60	18.0	18.5	25
Steam or Non heated	208-240V 1/1N ~	50/60	*	2.5	10
	380-480V 1 ~ (**)	50/60	*	2.5	10

* Total power and recommended fuse does not depend on the heating power in those cases.


** Prepared for 3 ~.

Water and steam connection		WH6-20LAC
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	30
Drain valve	ø mm	75
Draining capacity	l/min	170
Steam valve	DN	15
Steam pressure	kPa	300-600
Liquid detergent supplies		5
Floor requirements		
Frequency of the dynamic force	Hz	17.6
Floor load at max extraction	kN	4.2 ± 1.0
Sound levels		
Sound power/pressure level at extraction*	dB(A)	84/68
Sound power/pressure level at wash*	dB(A)	66/50
Heat emission		
% of installed power, max		5
Shipping data**		
Weight	net, kg	354
Shipping volume	m ³	1.66
Accessories		
Steel base		x
Hose kits for water or steam		x
Fluff collector		x
Dimensions in mm		
A Width		970
B Depth		945
C Height		1410
D1		460
D2		525
E		1510
F		1130
G		150
H		1330
I		400
J		300
K		1290
L		1210
M		350
N		100
O		335
P		340
Q		215


1 Display	7 Cold/Hot water or
2 Door opening ø 435 mm	Re-used water with network pressure (option)
3 Detergent box	8 Re-used water from tank/pump or
4 Cold/Hot water (Detergent box)	Liquid detergent supply
5 Cold water	9 Drain
6 Hot water	10 Liquid detergent supply
	11 Electrical connection
	12 Steam connection

* Sound power levels measured according to ISO 60704.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

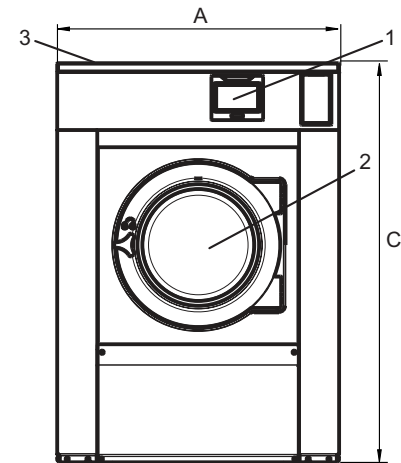

Front

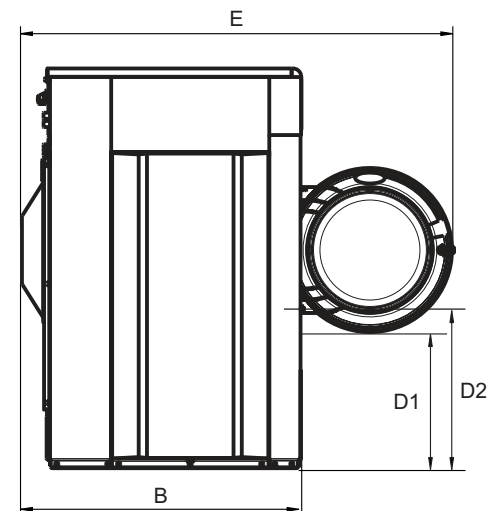

Side view

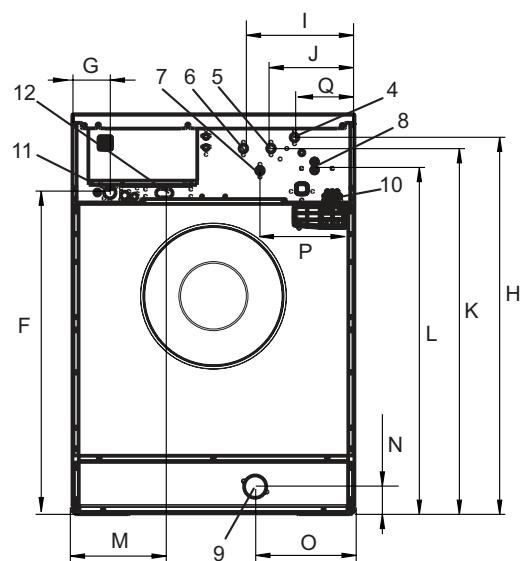


Rear

Electrical connections


Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-230V 3 ~	50/60	13.5 / 18.0	14.5 / 19.0	50 / 50
	240V 3 ~	50/60	13.5 / 18.0	14.5 / 19.0	35 / 50
	380-415V 3N ~	50/60	13.5 / 18.0	14.5 / 19.0	25 / 32
	440V 3 ~	50/60	13.5 / 18.0	14.5 / 19.0	20 / 32
	480V 3 ~	60	13.5 / 18.0	14.5 / 19.0	20 / 25
Gas heated/ Steam heated	220-240V 3 ~	50/60	*	1.0	10
	380-415V 3N ~	50/60	*	1.0	10
	440V 3 ~	50/60	*	1.0	10
	480V 3 ~	60	*	1.0	10

* Total power and recommended fuse does not depend on the heating power in those cases.


Steam, gas and air connections			TD6-20LAC
Steam	ISO 7/1-R		1"
Steam pressure		kPa	100-1000
Steam consumption		kg/h	35
Condensate	ISO 7/1-R		1"
Gas	ISO 7/1-R		1/2"
Gas pressure	Natural gas	Pa	2000
		mbar	20
	Propane	Pa	2800-5000
		mbar	28-50
Air outlet		ø mm	200
Evacuated air,	el 18.0 kW	m³/h	525
	gas 21.0 kW		600
	steam 25.0 kW		690
Pressure drop	el 18.0 kW	Max. Pa	650
	gas 21.0 kW		650
	steam 25.0 kW		650
Sound levels			
Sound power/pressure level at drying*			
		dB(A)	72/56
Heat emission			
% of installed power, max			15
Shipping data**			
Weight		kg	243
Shipping volume		crated, m³	2.07
Dimensions in mm			
A	Width		790
B(a)	Depth, el and gas		1200
B(b)	Depth, steam		1340
C	Height		1770
D			775
E			835
F			750
G			110
H			60
I			270
J			240
K			175
L			605
M			740
N			395
1 Operating panel 2 Door opening ø 580 mm 3 Electrical connection on gas heated machines 4 Gas connection/Electrical connection on electrical heated machines 5 Exhaust connection 6 Condensate connection 7 Steam connection			

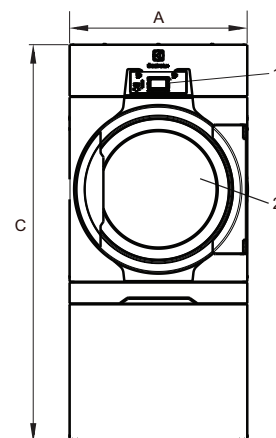

Front

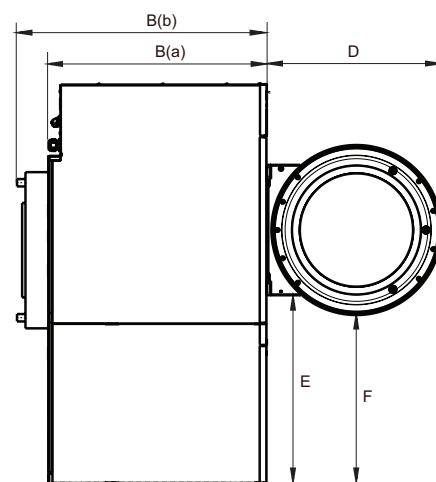

Left side

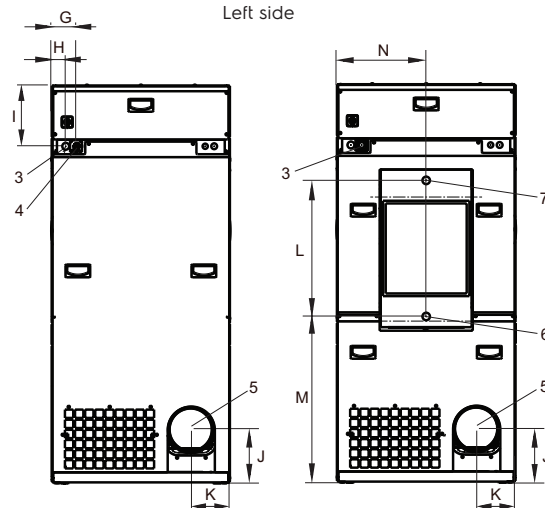

EI, gas

Steam

Rear side

Front and side panels in silver grey and dark blue (color samples can be ordered on part number 472998313).

* Sound power levels measured according to ISO 60704.

** Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.

Electrical connections				
Heating alternative	Main voltage	Heating power kW	Total power kW	Recommended fuse A
	Hz			
Heat pump	220-240V 1/1N ~ 50/60	*	5.5	25
	380-415V 3/3N ~ 50/60	*	6.5	10


* Total power and recommended fuse does not depend on the heating power in those cases.

Sound levels		TD6-20LAC
Sound power/pressure level at drying*		72/56
	dB(A)	
Heat emission		
% of installed power, max		15
Shipping data**		
Weight	kg	308
Shipping volume	crated, m ³	2.15
Dimensions in mm		
A(a) Width		790
B(a) Depth		1200
B(b) Depth		1230
C Height		1770
D		775
E		835
F		750
G		110
H		270
I		125
J		260
1 Operating panel		
2 Door opening ø 580 mm		
3 Electrical connection		
4 Drain for condense water		


Front and side panels in silver grey and dark blue (color samples can be ordered on part number 472998313).

* Sound power levels measured according to ISO 60704.


** Average data. Crated weight/shipping volume depends on configuration.
Please contact logistics for exact measures.

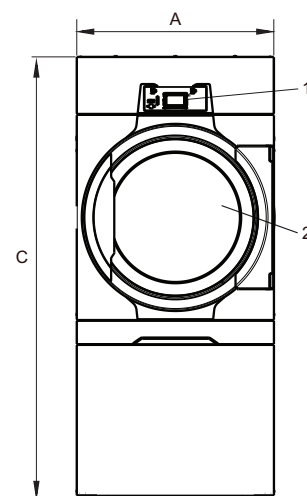

Front

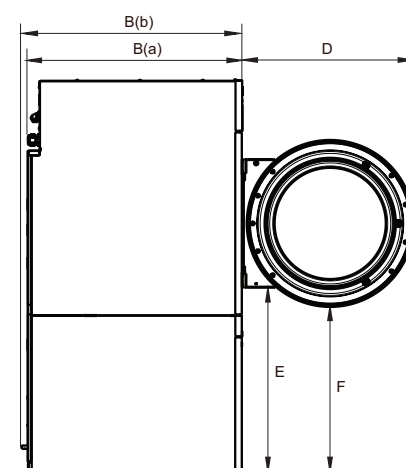

Left side

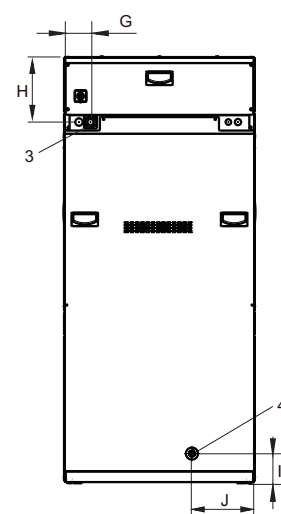

Rear side



Jetsave PNCs	Description
988930001	Complete kit with 2 pumps, 550 ml/min
988930002	Complete kit with 3 pumps, 550 ml/min
988930003	Complete kit with 4 pumps, 550 ml/min
988930004	Complete kit with 5 pumps, 550 ml/min

Acessories PNCs	Description
988916611	Single low level probe
432930071	Extension POWER cable (6m)
432930072	Extension DATA cable (6m)
988930031	ID interface for 3rd part party peristatic pumps or option for Low level alarm
432930065	Joining kit

Power supply
From the washer extractor: 100-240V- 50/60 Hz / 0.1A (Max)

Water supply
Min. 1.8 bar Max. 6 bar

Electrolux Professional name and description	Packaging 20 litres	Packaging 10 litres
W01 - lagoon Sensitive Detergent Professional detergent for natural/animal fiber	432731085	432731086
W03 - lagoon Sensitive Conditioner Professional conditioner for natural/animal fiber	432731087	432731088
W02 - lagoon Delicate Detergent Professional delicate universal detergent	432731089	432731090

For further information including spotting agents, please refer to the lagoon detergent Product Data Sheet



BASE; closed front and sides


Suitable for models: WH6-20LAC
 988918871
 Height: 230 mm
 Material: Galvanised, silver grey painted steel
 with stainless steel front panel.

BASE; "floating foundation"


Suitable for models: WH6-20LAC
 988918872
 Material: Galvanised, silver grey painted steel with
 stainless steel front panel.
 Feature: A "floating foundation" filled with
 concrete eliminates noise to other parts
 of the building.

