

Laundry presses, air operated

FPA1-WC, FPA2-WC, FPA3-WC



Features and benefits

- High temperature stainless steel polished head dries the fabric and gives it a flat finish
- High pressure achieves an excellent finish
- Adjustable pressure regulator for pressing different fabrics achieves an excellent finish
- Air operated reduces operator fatigue and allows high production output
- Safety two button closing improves operator safety
- High quality padding and cover for buck reduces impressions
- Easy installation and operation due to no vacuum needed and therefore no pedal

Main options

- Integral steam boiler – 9 kW
- Integral air compressor
- Electric steam iron
- Safety head guard (CE) improves operator safety
- Adjustable release timer simplifies the operation and ensures consistent results
- Water spray gun with support and condenser


Electrical connections	Standard	Optional			
		Built-in boiler	Built-in air compressor	Electric steam iron	
Voltage					
208-240V 1 AC 50/60 Hz (Standard model)	kW	-	-	-	0.8
230V 3 AC 50/60 Hz (Built-in boiler)	kW	-	9.0	0.75	-

Steam, air and vacuum connections					
Steam	DN	15	-	15	15
Recommended steam pressure	kPa	700	-	700	700
Steam consumption	kg/h	20	-	20	20
Condensate	DN	15	-	15	15
Compressed air	DN	10	10	-	10
Recommended air pressure	kPa	700	700	-	700
Air consumption	l/cycle	6	-	-	-
Shipping data ¹					
Weight	net, kg	326	+ 46	+ 46	+ 6
	crated, kg	356	+ 46	+ 46	+ 6


1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Dimensions in mm				
A	1250	1250	1250	1250
B	920	920	920	920
C	1250	1250	1250	1250
D	1450	1450	1450	1450
E	800	800	800	800
F	1030	1030	1030	1030
G	1190	1190	1190	1190
H	360	360	360	360
I	220	220 </td <td>220</td> <td>220</td>	220	220
J	470	470	470	470
K	205	205	205	205
L	520	520	520	520
M	260	260	260	260
N	1490	1490	1490	1490


- | | |
|--------------------------|--|
| 1. Control panel | 5. Compressed air |
| 2. Electrical connection | 6. Water supply (built-in boiler only) |
| 3. Steam connection | 7. Boiler drain (built-in boiler only) |
| 4. Condensate | |

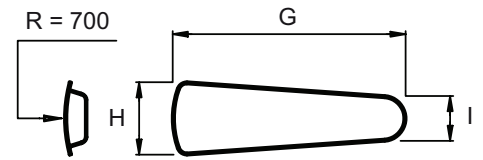

Utility shape
FPA1-WC shown

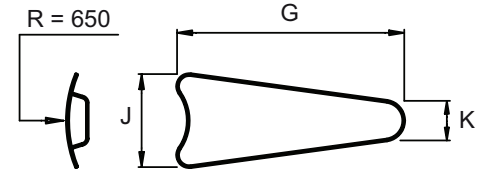

Utility/legger shape
FPA2-WC shown



Mushroom shape
FPA3-WC shown

