

Washer extractor

H7-75

Features and benefits

- **Intelligent controller offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Create new programs in your PC with the Laundry Program Manager, then transfer them to machines via USB port
 - Wash program packages optimized on Economy, Performance and Time. (Available on general programs)
- Low water and energy consumption – see table below
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- **Proven robustness:**
 - Maximises the extraction force, leading to highest dewatering and savings in drying
 - Minimizes the stress on the machine, leading to trouble-free operation and increased machine lifetime
 - Reduces vibrations, making it possible to install the machine in all locations



Images shown are a representation of the product only and variations may occur.

Main options

- Automatic liquid detergent supply (optional I/O board)
- Stainless steel front panel
- Connection to booking- /payment- system or coin meter
- Drain pump

Main specifications		H7-75	
Max. capacity, filling factor 1:9	kg/lb	8/18	
Drum, volume	litre	75	
Drum, diameter	ø mm	520	
Extraction	rpm	1245	
G-factor		400	
Standard heating alternatives	electricity, kW	7.5	
Other energy heating alternatives	electricity, kW	2.0 / 3.0 / 5.4 ¹	
	steam	x	
	non-heated	x	
Consumption data "Normal 60°C" Economy²		EI	Steam ³
Total time	Min	47	47
Water consumption (cold+hot)	litre	50+12	62+0
Energy consumption (motor/heating/hot water)	kWh	0.15/0.35/0.75	0.15/-
Steam consumption	kg	-	1.65

1. Special requirement on request.


2. Water temperature 15°C cold water and 65°C hot water.

3. Depending on steam pressure.

Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V 1/1N~	50/60	3.0	3.4	16
	220-240V 1/1N~	50/60	5.4/7.5	5.7/7.8	25/32
	220-240V 3~	50/60	3.0	3.4	10
	220-240V 3~	50/60	5.4/7.5	5.7/7.8	16/25
	380-415V 3N/3~	50/60	3.0	3.4	10
	380-415V 3N/3~	50/60	5.4/7.5	5.7/7.8	10/16
	440V 3~	50/60	5.4/7.5	5.7/7.8	10/16
Non heated/Steam heated	208-240V 1/1N~	50/60	1	1.0	10
	380-480V 1~ ²	50/60	1	1.0	10

1. Total power and recommended fuse does not depend on the heating power in those cases.

2. Prepared for 3~

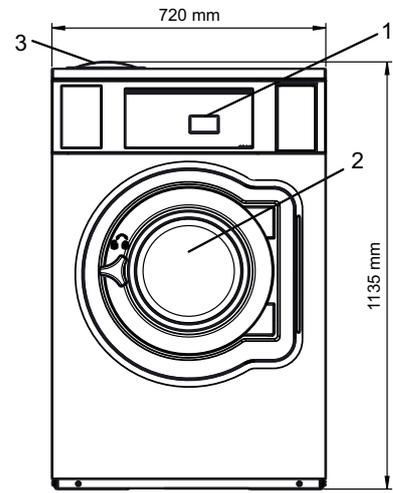

Water and steam connection ¹		H7-75
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	20
Drain valve	ø mm	50/75
Draining capacity	l/min	170
Steam valve	DN	15
Steam pressure	kPa	300-600
Liquid detergent supplies		5

Floor requirements		
Frequency of the dynamic force	Hz	20.8
Floor load at max extraction	kN	1.9 ± 0.5

Sound levels		
Sound power/pressure level at extraction ²	dB(A)	73/59
Sound power/pressure level at wash ¹	dB(A)	61/47

Heat emission	
% of installed power, max	5

Shipping data ³		
Weight	net, kg	158
Shipping volume	m ³	0.81

Accessories	
Steel base	x
Hose kits for water or steam	x
Fluff collector	x

- | | |
|---|--|
| 1. Operating panel | 7. Re-used water from tank/pump or Liquid detergent supply |
| 2. Door opening ø 310 mm | 8. Drain |
| 3. Detergent box | 9. Liquid detergent supply |
| 4. Cold water | 10. Electrical connection |
| 5. Hot water | 11. Steam connection |
| 6. Cold/Hot water or Re-used water with network pressure (option) | |

1. The washer extractor is equipped with a built-in type AB airgap according to EN 61770.

2. Sound power levels measured according to ISO 60704.

3. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

