

# Bed type Ironer

## IB62310, IB62314, IB62316

### Features and benefits

- Return feed system
- Finger guard protection provides additional safety for operator
- Adjustable temperature
- Cylinder covered with steel wool and cotton felt for a long life time and a good drive of the linen
- Ergonomic control pedal
  - engage the iron against the cylinder
  - disengage the iron against the cylinder
  - stop the cylinder motion to improve a fabrics pleat
- Feeding table and reception tray made of steel

### Other options

- Variable speed control
- Superior package
  - Nomex padding on cylinder for longer life time
  - metallic stripper to avoid linen to stick on the cylinder




*Images shown are a representation of the product only and variations may occur.*

Main specifications	IB62310	IB62314	IB62316	
Capacity, max. water evaporation <sup>1</sup>	l/h	5.0	6.8	8.1
Cylinder, diameter	Ø mm	230	230	230
Cylinder, length	mm	1000	1400	1650
Ironing speed	m/min	3.4	3.4	3.4
Ironing speed with variable speed control option	m/min	1-4	1-4	1-4
Heating, electricity	kW	5.0	7.2	8.4

<sup>1</sup> 20% residual moisture content and 100% roller utilization (ISO 9398).

<b>Electrical connections<sup>1</sup></b>	<b>IB62310</b>	<b>IB62314</b>	<b>IB62316</b>
Without speed control:			
440V / 3 AC / 60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3N AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3 AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
230V / 3 AC / 50 Hz	5.2 (16)	7.5 (20)	-
208V / 3 AC / 60 Hz	5.2 (16)	7.5 (20)	-
230V / 1 AC / 50-60 Hz	5.2 (32)	7.5 (32)	-
With speed control:			
440V / 3 AC / 60 Hz	-	-	-
400V / 3N AC / 50-60 Hz	5.2 (10)	7.5 (16)	8.7 (16)
400V / 3 AC / 50-60 Hz	-	-	-
230V / 3 AC / 50 Hz	5.2 (16)	7.5 (20)	8.7 (32)
208V / 3 AC / 60 Hz	5.2 (16)	7.5 (20)	8.7 (32)
230V / 1 AC / 50-60 Hz	5.2 (32)	7.5 (32)	-

1. Other voltages available, see installation manual.

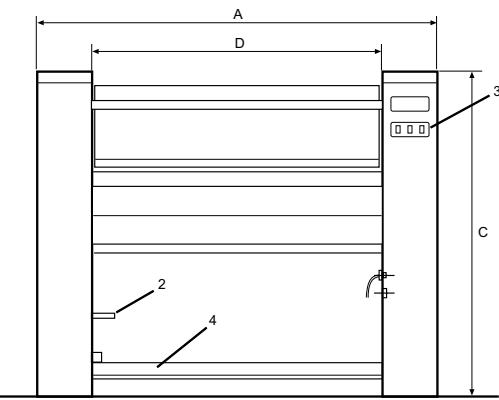

<b>Connections</b>	<b>IB62310</b>	<b>IB62314</b>	<b>IB62316</b>
Exhaust, outlet	Ø mm	-	40
<b>Sound levels</b>			
Airborne sound level	dB(A)	52	54
<b>Heat emission</b>			
% of installed power, max		3	3
<b>Shipping data<sup>1</sup></b>			
Weight	net, kg	120	140
Shipping volume	m <sup>3</sup>	0.91	1.16
			1.34

1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

<b>Dimensions in mm</b>	<b>IB62310</b>	<b>IB62314</b>	<b>IB62316</b>
A	1395	1795	2045
B	510	510	510
C	1025	1025	1025
D	1055	1455	1705
E	940	940	940
F	420	420	420

1. Electrical connection  
2. Bed release lever  
3. Control panel  
4. Control pedal

