

Hot cylinder ironers

IW63316, IW63320



Images shown are a representation of the product only and variations may occur.

Features and benefits

- Easy to use control panel
- Ergonomic working height
- Finger guard protection providing additional security for operators
- Pressure roll with a Nomex® padding for a good ironing quality
- Durable ironing belts made of Nomex® which can withstand temperatures above 220°C
- Stainless steel hot cylinder (3 mm) prevents rust and improve lifetime
- Maintenance free ceramic gas burner minimizes downtimes. 20% more efficient than regular blue flame burners. A unique and patented burner by Electrolux Professional
- Return feed, can be installed close to a wall for space saving
- Foldable feeding tray so that large flats avoid touching the ground
- Auto stop cool-down function

Main specifications		IW63316	IW63320
Capacity, max. water evaporation ¹	l/h	19.5	24.5
Hot cylinder, diameter	ø mm	325	325
Hot cylinder, length	mm	1650	2065
Ironing speed	m/min	0.5–7.5	0.5–7.5
Specific speed for ETL version	m/min	0.5–5.5	0.5–5.5
Heating, electricity	kW	18.0	22.5
Heating, gas	Btu/h (kW)	68 240 (20)	85 330 (25)

1. 50% residual moisture content cotton 190 gr/m² and 100% cylinder use (ISO 9398).


Electrical connections ¹	IW63316	IW63320
Electric heated		
400V / 3 AC / 50-60 Hz	18.0 (32)	22.5 (32)
230V / 3 AC / 50-60 Hz	18.0 (60)	22.5 (60)
Gas heated (CE)		
400V / 3 AC / 50-60 Hz	0.5 (10)	0.5 (10)
230V / 3 AC / 50-60 Hz	0.5 (10)	0.5 (10)
230V / 1 AC / 50-60 Hz	0.5 (10)	0.5 (10)
Gas heated (AGA)		
400V / 3 AC / 50-60 Hz	0.5 (10)	0.5 (10)
Gas heated (ETL)		
208-240V / 1 AC / 60 Hz	0.5 (10)	0.5 (10)
120V / 1 AC / 60 Hz	0.5 (10)	0.5 (10)

1. Other voltages available, see installation manual.

Gas and exhaust connections	IW63316	IW63320
Gas	DN 20	20
Exhaust, outlet diameter	mm 125	125
Exhaust, evacuated air	m³ 426	515
Sound levels		
Airborne sound level	dB(A) 65	65
Heat emission		
% of installed power, max	2	2
Shipping data ¹		
Weight	net, kg 300	330
Shipping volume	m³ 2.7	3.2

1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Dimensions in mm	IW63316	IW63320
A	2030	2445
B	690	690
C	1145	1145
D	430	430
1. Control panel 2. Electrical connection 3. Exhaust connection 4. Main switch 5. Gas connection		

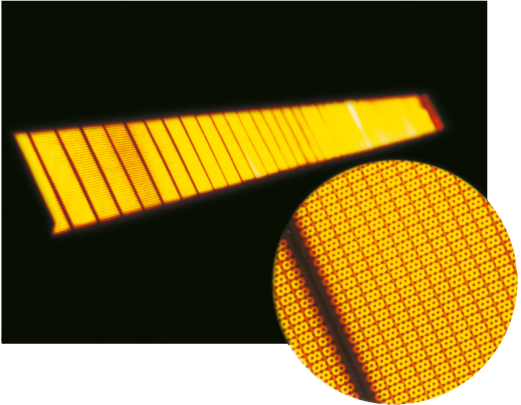

Maintenance free ceramic gas burner minimizes downtimes. 20% more efficient than regular blue flame burners. A unique and patented burner by Electrolux Professional.

