

Industrial ironers

IW64821LF, IW4832LF



4 stars Ergonomic Certification



Certified ergonomics

Reducing workload, easing stress, intuitive and user friendly



Outstanding productivity

Brilliant results with optimised staffing costs maintaining strict standards of hygiene




Full flexibility

Multiple solutions designed for your specific needs



Tried & tested durability

Guaranteeing consistent results without interruption

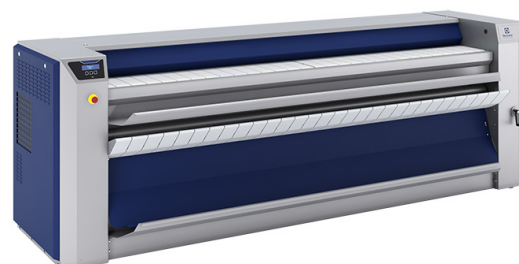

OPTIONS & AREA CONCERNED BY THE OPTIONS LF Model - Electric and Gas heated		Active	Performance	Superior
Manual Feeding:				
Feed Alone + Vacuum Table	Stop the feeding table (while you are still ironing) to feed alone large item	No	No	Yes
Vacuum Table	To optimise the feeding and by consequence the ironing quality	No	No	Yes
Folding:				
Antistatic Bar	To avoid polyester to stick on the cylinder	Yes	Yes	Yes
Productivity:				
Feed Now	To inform operator when and which area the ironer cylinder is ready to iron	Yes	No	No
Dubixium	Keep the cylinder temperature always uniform and optimise the productivity	No	Yes	Yes
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	No	No	Yes

OPTIONS & AREA CONCERNED BY THE OPTIONS LF Model - Steam heated		Active	Performance	Superior
Manual Feeding:				
Feed Alone + Vacuum Table	Stop the feeding table (while you are still ironing) to feed alone large item	No	No	Yes
Vacuum Table	To optimise the feeding and by consequence the ironing quality	No	Yes	No
Folding:				
Antistatic Bar	To avoid polyester to stick on the cylinder	No	No	Yes
Productivity:				
DIAMMS	Operates automatically at optimum speed whilst perfectly managing the moisture in your laundry	No	Yes	Yes

Main specifications		IW64821LF	IW4832LF
Capacity, max. water evaporation, el / steam / gas ¹	l/h	40 / 63 / 37	59 / 93 / 59
Cylinder, diameter, el & gas / steam	ø mm	479 / 457	479 / 457
Cylinder, length	mm	2120	3170
Ironing speed	m/min	1.5-9	1.5-9
Heating, electricity	kW	37	54
Heating, steam (900 kPa)	kg/h	92	141
Heating, gas	Btu/h (kW)	150100 (44)	221800 (65)

1. 50% residual moisture content cotton 180g/m² and 100% cylinder use (ISO 9398-1).

Electrical connections ¹		IW64821LF	IW4832LF
Electric heated:			
400-415V 3AC 50/60 Hz	kW(A)	38 (63)	56 (100)
Gas heated:			
208-240V 3AC 60 Hz	kW(A)	2 (16)	2 (16)
Steam heated:			
400V 3 AC 50/60 Hz	kW(A)	2 (16)	2 (16)

1. Other voltages available, see installation manual.

Steam, gas and air connections		IW64821LF	IW4832LF
Steam	DN	20	20
Rec. steam pressure	kPa	900	900
Condensate	DN	10	10
Gas	DN	20	20
Gas pressure, natural gas (G20/G25)	Pa	2000 / 2500	2000 / 2500
Gas pressure, propane (G31)	Pa	3700 / 5000	3700 / 5000
Air outlet	ø mm	150	150
Evacuated air, gas	m³/h	830	1010
Evacuated air, el, steam	m³/h	740	960
Pressure drop	max. Pa	200	200

Sound levels		
Airborne sound level	dB(A)	73

Heat emission		
% of installed power, max	3	3

Shipping data ¹		
Weight	net, kg	1080
Shipping volume	m³	5.63
		1390
		7.64

1. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Dimensions in mm		IW64821LF	IW4832LF
A Overall width		2785	3835
B Ironing width		2120	3170

- Control panel
- Exhaust connection
- Steam connection
- Condensate connection
- Electrical connection
- Gas connection

