

Tumble dryer

TD6-10 with heat pump



Dryer featuring exceptional savings and effortless use



Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- Lint filter
The horizontal filter drawer is positioned for easy access and cleaning without the need to bend down
Also user-friendly ECL Easy Clean System for lint screen and filters: less maintenance and constant high performance



Long-term savings

Innovative features to save money and time, and embrace a sustainable lifestyle with up to 60% energy saving due to the heat pump technology

- No exhaust ducting needed
installation suitable anywhere at minimal cost
- Moisture Balance
Helps to stop the drying process at the right time to save on energy costs



Pure control

Monitor your equipment and performance from anywhere, allowing to take action and to improve your business with OnE Laundry - the personal assistant for hygiene validation management, process management and revenue management (optional)



Outstanding productivity

Dry more laundry in less time: a game-changing improvement

- Reversing drum
Minimizes wrinkles and drying time to get an effective and even drying performance

Main options and accessories

- Can operate in high ambient temperatures thanks to unique water cooling system
- Reversible door hanging for a convenient laundry flow
- Silent operation



Images shown are a representation of the product only and variations may occur.

Main specifications		TD6-10
Rated capacity, filling factor 1:22	kg/lb	8.6/19.2
Drum volume	litre	190
Drum diameter	mm	680
Rated input	kW	2.3
Consumption data*		
Drying time**	min	51
Energy consumption***	kWh	1.64
Evaporation	g/min	85
Energy/water evaporation	kWh/l	0.38
Energy/load of linen	kWh/kg	0.19
Water consumption****	litre	0-8
Average data for warm and cold start		
* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.		
** Drying time for filling factor 1:44 is 31 min.		
*** With ambient temperature of 22°C, 50% humidity.		
**** Cooling water temperature of 22°C, water pressure 4.5 bar.		

Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
	Hz				
Heat pump	220-240V 1N -	50	-	2.3	13
	380-415V 3N - *	50	-	2.5	10

Sound levels		TD6-10
Sound power/pressure level at drying**		70/55
		dB(A)
Heat emission		
Average heat emission per drying cycle used to assess ventilation need***		1.0
		kW
Shipping data****		
Weight		188
Shipping volume		1.20
		kg
		crated, m ³
Dimensions in mm		
A	Width	720
B	Depth	775
C	Height	1685
D		1410
E		1505
F		45
G		110
H		90
I		50
J		95
K		340
L		720
M		775
N		690
O		610
1	Operating panel	
2	Door opening ø 400 mm	
3	Electrical connection	
4	Drain (condensed water)	
5	Drain (cooling water)	
6	Water connection	

Front and side panes in silver grey and door handle in dark blue (color samples can be ordered on part number 472998313).

* Possibility to change connection during installation, see installation manual.

** Sound power levels measured according to ISO 60704.

*** For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician. For sufficient ventilation all sources introducing heat need to be taken into account plus all other parameters effecting the ventilation need. Climate zone, building parameters, room size, etc.

**** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.




This product contains fluorinated greenhouse gases.

R134A: 1,350kg


GWP 1430

CO2 equivalent: 1,931 t


Hermetically sealed

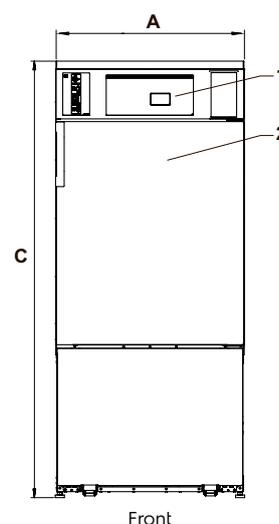

Front

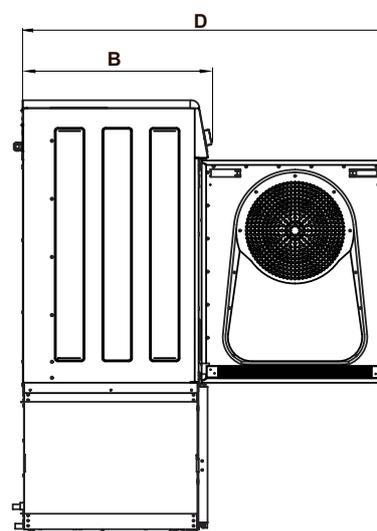

Left side

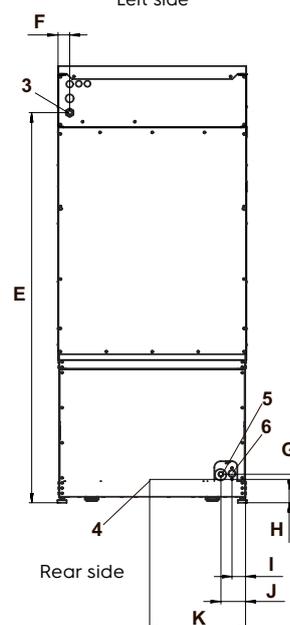

Rear side