

Drying cabinet

DC6-8_m with heat pump

Drying Cabinets have no mechanical action and are used to efficiently dry bulky items such as workwear/overalls/gloves and boots or delicate items such as silk and linen



Priority on people

Ergonomic design, with user friendly positioning of door handle, control panel and suitable for disabled users

- Easy operation with 2 automatic drying programs, which will stop once the load is dry
- Braille script
- Extensible hangers for easy loading/unloading, reversible
- Flexible installation with adjustable feet
- Insulated doors for quiet operation and robust design



Long-term savings

By using a Drying Cabinet with a Heat Pump, not only can you avoid exhaust connection you can reach energy saving of 40% compared with an electric vented version. There are two options of heat pump versions



Productivity

Time saving when used instead of flat or hang drying. The door can be opened a short moment without stopping the drying process

Safety

Option to activate child safety start lock.

- Door circuit breaker which interrupts the drying process when the door is opened

Accessories

- Shoe rack to make it easier to dry shoes and boots.
- Glove hanger for more efficient drying of gloves, hats etc. 988704088, 432730570
- Hanger which makes hanging of garments easier. 988704089, 432731032



Main specifications		DC6-8_m
Rated capacity	kg	8
Evaporation*	g/min	50
Drying time cotton*	min	60
Rated input	kW	2.3
Energy/load of linen	kWh/kg	0.35
Energy/water evaporated	kWh/l	0.70

* Applies to 6 kg dry weight cotton with 50% residual moisture.


Electrical connection		DC6-8_m
Voltage	400V 3N AC 50 Hz	
Traditional thread locker	kW(A)	2.3(10)
Automatic circuit breaker	kW(A)	2.3(10)
Sound level		
Pressure level*	dB(A)	<62
Heat emission		
Average heat emission per drying cycle used to assess ventilation need**	kW	1.7
Weight		
	net, kg	189
Dimensions in mm		
A	Width	1195
B	Depth	645
C	Height	2060
D		425
E		1080
F		90
G		2075
H		435
I		450
J		810
K		850
1 Operating panel 2 Condensation nipple \varnothing 18 mm and 3 m hose included		




Colour of front and side panels is silver grey and handle is dark blue.

* Sound power levels measured according to ISO 60704.


** For assistance with dimensioning necessary ventilation needs, contact authorized ventilation technician.
 For sufficient ventilation all sources introducing heat need to be taken into account plus all other parameters effecting the ventilation need. Climate zone, building parameters, room size, etc.

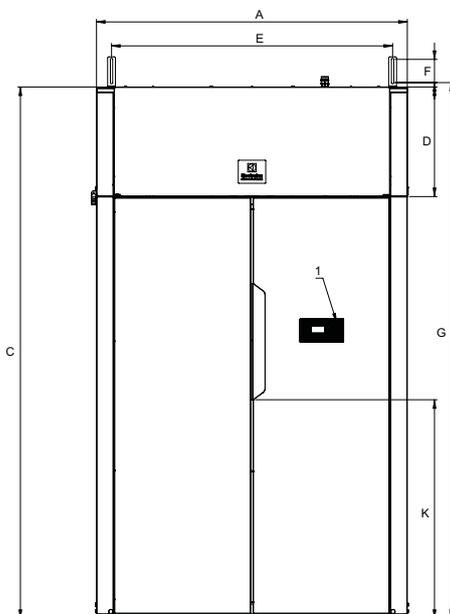

Front

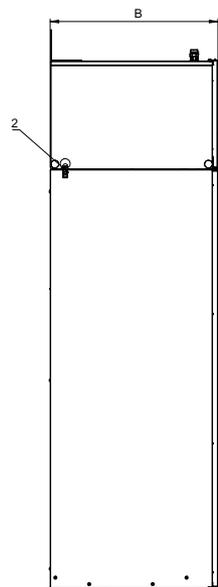

Left side

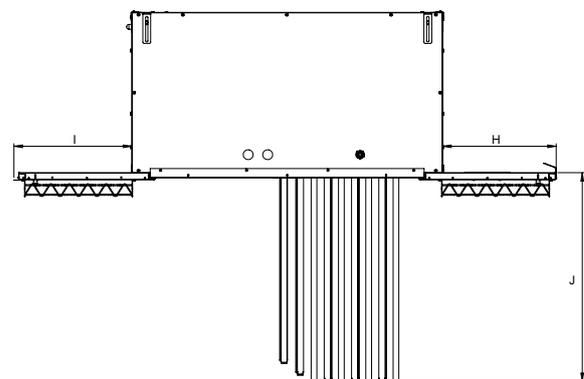

Top view