

# Laundry Press – Air operated

## FPA4-WC




### Features and benefits

- High temperature nickelplated polished head dries the fabric and gives it a flat finish
- Professional steam heating system for head (for external steam supply or with optional built-in boiler)
- Adjustable pressure regulator for pressing different fabrics achieves an excellent finish
- Air operated reduces operator fatigue and allows high production output
- Two button closing improves operator safety
- High quality padding and cover for buck reduces impressions
- Easy installation and operation due to no vacuum needed and therefore no pedal
- Buck size 1350 x 460 mm

### Main options

- Integral steam boiler – 18 kW
- Integral air compressor
- Safety head guard (CE) improves operator safety
- Electric steam iron

Electrical connections		Standard	Optional		
			Built-in boiler	Built-in air comp.	Electric steam iron
Voltage, standard					
208-240V 1 AC 50/60 Hz	kW (A)	-	-	-	0.8 (6)
Voltage, built-in boiler					
230V 3 AC 50/60 Hz	kW (A)	-	12 (35)	1.13	-
<b>Steam, air and vacuum connection</b>					
Steam	DN	15	-	15	15
Rec. steam pressure	kPa	700	-	700	700
Steam consumption	kg/h	20	-	20	20
Condensate	DN	15	-	15	15
Compressed air	DN	10	10	-	10
Rec. air pressure	kPa	700	700	-	700
Air consumption	l/min	29 l/cycle			
<b>Shipping data</b>					
	net, kg	400	+ 46	+ 46	+ 6
	crated, kg	430	+ 46	+ 46	+ 6
<b>Dimensions in mm</b>					
<b>A</b> Width		1250	1250	1250	1250
<b>B</b> Depth		1135	1135	1135	1135
<b>C</b> Height		1270	1270	1270	1270
<b>D</b>		1600	1600	1600	1600
<b>E</b>		800	800	800	800
<b>F</b>		1030	1030	1030	1030
<b>G</b>		1390	1390	1390	1390
<b>H</b>		500	500	500	500
<b>1</b> Control panel	<b>4</b> Condensate	<b>7</b> Boiler drain (built-in boiler)			
<b>2</b> Electrical connection	<b>5</b> Compressed air				
<b>3</b> Steam connection	<b>6</b> Water supply (built-in boiler)				

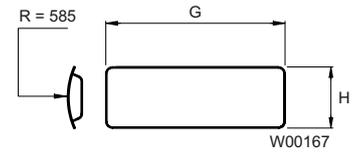

Rectangular shape

