

Washer extractor

QuickWash QWC

Features and benefits

- Control knob for simple program selection and start
- Large, clear display
- **AS – Automatic Savings:**
 - The machine weighs the linen and adjusts the amount of water and energy according to the load. This leads to considerable savings in case the machine is not fully loaded
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient dewatering
- Panels and frame made from galvanized steel
- Inner and outer drums made from stainless steel
- Powder coated black front panel, side panels and top cover
- Strong door and hinges. Easy-grip, ergonomic door handle which makes the door easy to open and close
- Drain pump
- Frequency-controlled motor with no carbon or brushes
- Door seal in the door, does not wear when the machine is loaded and unloaded



Images shown are a representation of the product only and variations may occur.

Main options

- Stacking kit to install tumble dryer QuickDry QDC on top to save space
- Plinths for raising the machine to a comfortable height (height 100 mm when installed with a tumble dryer, or 290 mm)
- Connecting hoses

Main specifications		QuickWash QWC
Max. capacity	kg	5.5
Drum, volume	litre	53
diameter	∅ mm	452
Extraction	rpm	1300
G-factor		425
Heating alternatives, electricity	kW	2.2 / 2.8 / 4.4
Consumption data "Normal 60°C" *		
Total time	min	38 / 49 / 44
Water consumption	litre	56
Energy consumption (motor/heating)	kWh	0.15/0.80

* Water temperature 15°C cold water.

Produced according to ISO 9001 and ISO 14001.


Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.

Electrical connections					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-240V 1-	50/60	2.2	2.6	16
	220-240V 1-	50/60	2.8	3.1	13
	380-415V 3-	50/60	4.4	4.8	10


Water connections		QuickWash QWC	
Water valves	DN	20	
Water pressure	kPa	200-500	
Capacity at 300 kPa	l/min	17	
Draining capacity	l/min	25	
Max. draining	l	20	
Floor requirements			
Frequency of the dynamic force	Hz	20	
Floor load at max extraction	kN	1.02 ± 0.3	
Sound levels			
Sound power/pressure level at extraction*	dB(A)	70/56	
Sound power/pressure level at wash*	dB(A)	56/42	
Heat emission			
% of installed power, max		5	
Shipping data**			
Shipping volume	net, kg m ³	100 0.46	
Accessories			
Stacking kit with QuickDry QDC		x	
Stainless base, 290 mm, and galvanised base for stacking installation, 100 mm		x	
Dimensions in mm			
A1	Width	595	
A2	Width	735	
B	Depth	681	
C	Height	832	
D1		284	
D2		310	
E		641	
F		84	
G		194	
H		48	
I		65	
J		78	
K		120	
L		119	
M		501	
N		974	
O		764	
1	Control panel	6	Drain valve
2	Door opening ø 255 mm	7	Drain pump
3	Detergent box	8	Electrical connection
4	Cold water	9	Payment system
5	Hot water		

* Sound power levels measured according to ISO 60704.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

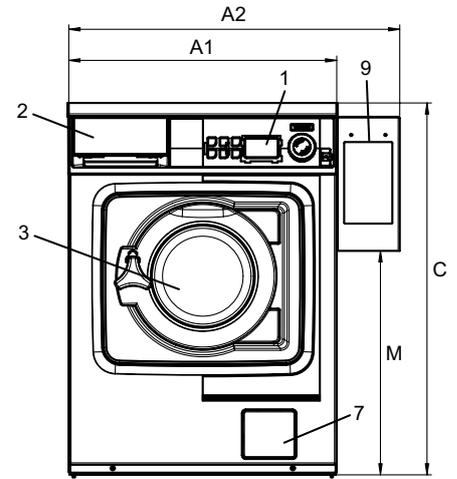

Front

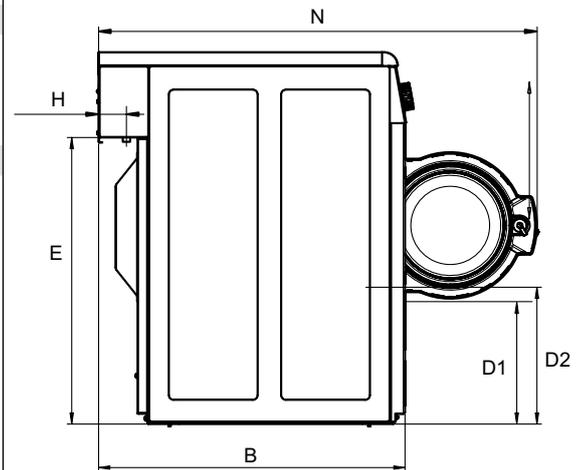

Side view

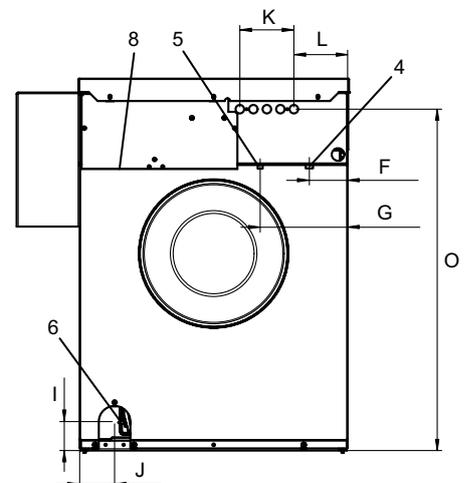

Rear