

Tumble dryer

T5425S

Features and benefits

- High productivity – 2 full loads per hour per pocket
- Low energy consumption for optimal efficiency and economy
- Selection of temperature and time for easy operation
- Customized user panels for specific user needs – available for Coin and OPL (On Premises Laundry)
- Large door opening for easy loading and unloading
- Easy access to vital parts from front and rear for simple servicing
- With Compass Pro program control
 - Large and clear display for easy program selection
 - Easy access with user-friendly interface
 - Language selection
 - Service program for adjustment of parameters
 - USB connection
- Serviceprogram for adjustment of parameters eg. temperature and cool-down time
- The coin version with Ecopower to avoid over drying of the garments and get a lower energy consumption

Main options

- Stainless steel front
- Stainless steel drum
- Reversing drum
- Connection to booking- /payment- system or coin meter



Images shown are a representation of the product only and variations may occur.

Main specifications**			T5425S
Rated capacity, filling factor 1:18		kg/lb	23.5/51.7
	filling factor 1:22	kg/lb	19.2/42.3
Drum volume		litre	423
Drum diameter		mm	832
Heating			
gas		BTU/h (kW)	94 000 (27.5)
Consumption data (filling factor 1:22)*			Gas
Total time		min	22
Energy consumption		kWh	10.2
Evaporation		g/min	440
Energy kWh/litre water evaporated		kWh/l	1.06
Max. pressure drop		Pa	520
* At rated capacity 100% cotton load at 50% initial moisture dried to 0%.			
** Value per pocket			

Produced according to ISO 9001 and ISO 14001.

Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.

Electrical connections

Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
	Hz				
Gas heated	220-240V 3 ~	50/60	-	1.3	10
	380-480V 3 ~	50/60	-	1.5	10
	230-240V 1 ~	50	-	1.7	10

Gas and air connections

Gas and air connections			T5425S
Gas pressure	Natural gas	ISO 7/1-R	3/4"
		Pa	2000-2500
	Propane	mbar	20-25
		Pa	2800-5000
Air outlet		mbar	28-50
Evacuated air, Pressure drop	gas	Ø mm	200
	gas	m³/h	1700
		Max. Pa	520

Sound levels

Sound power/pressure level at drying*	
	dB(A)
	77/60

Heat emission

% of installed power, max	15
---------------------------	----

Shipping data**

	net, kg	440
	crated, m³	2.8


Dimensions in mm

A	Width	868
B	Depth	1336
C	Height	2086
D		34
E		1310
F		1238
G		288
H		215
I		1084
J		141
K		40
L		34
M		32
N1		110
N2		145
N3		189
O		816
P		2183


- 1 Operating panel
- 2 Door opening Ø 687 mm
- 3 Electrical connection
- 4 Gas connection
- 5 Exhaust connection

* Sound power levels measured according to ISO 60704.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

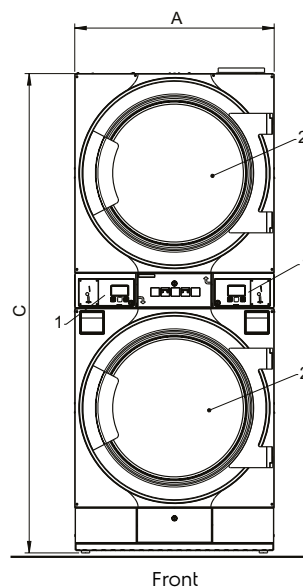

Front

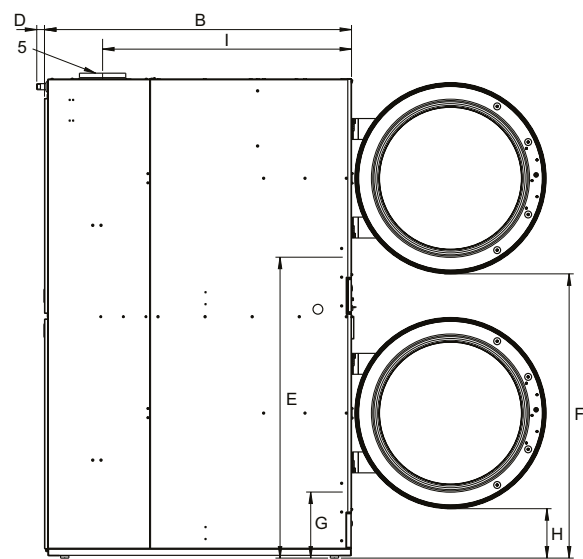

Left side

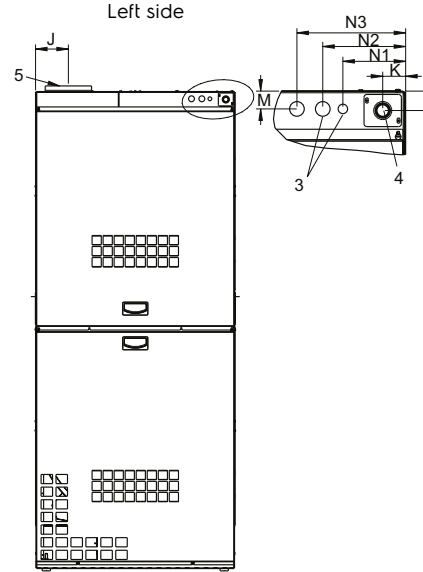

Rear side

