



Range Overview

Professional Laundry

Excellent solutions that meet your needs

Boasting intelligent features and unique benefits, our solutions offer the utmost in quality combined with the lowest utility costs for laundries of all sizes.



Electrolux Professional Excellence

Excellence is central to everything we do.

By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services.

To be the OnE making our customers' work-life easier, more profitable - and truly sustainable every day.



Our design is all about you

Anyone who does laundry day in and day out knows that repetitive acts like reaching, bending and pouring can be stress points that make the job more difficult and reduce productivity. By focusing on the physical and cognitive interaction between user and equipment, **we make each of these motions more comfortable for an all-around effortless experience.**

Certified comfort

The user interface has passed third party external testing and the new range is **certified to international standards of ergonomics** and human-centered design.


Our washers, dryers, barrier washers and ironers have earned **the prestigious 4-star rating for ergonomics.**

This means they have been user-tested to make sure your operators will feel less tension and strain, so they—and your business—can thrive.

Pioneers in usability

Ergonomic interventions can reduce work-related musculoskeletal disorders (WMSDs) by **59%**, with an average decrease of **75%** in sick days and a **25%** increase in productivity.

Washington State
Department of Labor & Industries

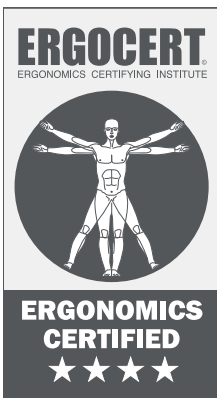

Experience 4-stars



Compliance with ergonomic principles
Designed with you in mind



Evidence-based anthropometric & biomechanical compliance
Reduced risk of injury



Evidence-based usability
The culmination of years of professional studies and expertise



Human-centered design
To make laundry simple and stress-free

Washer Extractor Control

Ensures the best utility cost optimisation and customising



ClarusVibe

- ▶ A clear and comprehensive layout of the full HD 7" color touchscreen gives users full command of the process
- ▶ An easy-to-use interface allows to set a customizable picture for each selected program
- ▶ Fully and easily editable programs for any washing need. From delicate garments to workwear and from surgical scrubs to plastic toys
- ▶ 15 liquid detergent signals
- ▶ The library can be updated any time, directly on screen, without the need for a computer
- ▶ Compatible with any language, left-to-right and right-to-left scripts
- ▶ On-screen statistics (working time, runs, waiting time, load weight, ...)
- ▶ Full control of dosing pumps, the right amount of each chemical is added at the right step of the process



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in up to 18 languages, plus Real-time clock
- ▶ Create new programs your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ 5 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System



Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on the Clarus Control®/ Clarus Control® TS panel or on your PC with the Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System*



Clarus Control® TS

- ▶ Easy-to-use touch screen for Pullman barrier washers
- ▶ Fully programmable with up to 30 programs
- ▶ Delayed start with Real-time clock for next-day unloading
- ▶ 13 liquid detergent signals
- ▶ Second display option on the clean side for more cycle oversight
- ▶ Create new programs directly on the Clarus Control® TS panel or on your PC with the Laundry Program Manager, then transfer them to machines via memory card

Tumble Dryer Control

Ensures the best flexibility and usability



Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in up to 18 languages, plus Real-time clock
- ▶ Heat Pump log available for Heat Pump version
- ▶ Larger font and clearer program icons

Selecta Control®

- ▶ Select drying time, cooling and reverse action
- ▶ Continuous self-testing, displays and logs error codes for easy troubleshooting
- ▶ Process monitoring via Certus Management™ Information System

Ironer Control

ensures the best results thanks to process optimisation



Clarus TS (only for the FFS model)

- ▶ Touch screen interface
- ▶ Perfect to manage an ironer equipped with a Feeder, a Length folder, a Cross folder and a Stacker (The Folding can be made automatically or defined via customizable programs)
- ▶ Helpful to minimize the training requirements
- ▶ The ironer can be used in Manual mode or Automatic mode (DIAMMS functionality)
- ▶ Provides numerous technical pages for accessing statistics/ customization and support maintenance and service

Digital interface

- ▶ Unique 3 buttons digital display with 2 lanes information
- ▶ Speed, temperature and item counter are immediately available in the screen
- ▶ The navigation is intuitive and userfriendly (Full Menu-Guided setup)
- ▶ This interface do have a service mode to support easy maintenance and service

Electro-mechanical control

- ▶ Easy to read and set
- ▶ Ironing temperature and speed can be adjusted at any time
- ▶ Autostop function to maximise ironing belt lifetime (standard)

Excellence for your Professional Laundry

Because every laundry is different



Self-Service Laundry

Robust and easy-to-use machines, easy maintenance and fast access for customers. That's the key to a successful self-service laundry. Our solutions are developed for low running costs, reduce downtime and maximise efficiency in the total process.



Multi-Housing Laundry

Best-in-class solutions for quality, economy and excellent washing results. Flexible programs and easy-to-use instructions give your tenants a pleasant laundry experience. Thanks to lower water and energy consumption, both you and the environment win.



Commercial Laundry

Higher performance, higher productivity, lower running costs and maximum transparency in the laundry process: that's what really matters in the commercial B2B laundry business. The lagoon® Advanced Care system from Electrolux Professional is a complete business opportunity to keep your commercial B2C laundry operating at its maximum level while reducing environmental liability costs. An eco-friendly solution for the care of delicate garments, approved by The Woolmark Company.



Care Laundry

Always maximum hygiene standards and full control over the laundry process. Thanks to best-in-class hygiene programs, Electrolux Professional offers safe and reliable solutions combined with unparalleled flexibility.



Facility Management Laundry

A clean performance for your material assets. Short processes, increased efficiency, long mop service life and optimal cleaning quality. In a nutshell: microfibre Excellence by Electrolux Professional.



Hospitality Laundry

Improve your service with 5-stars solutions for cost savings and reliability. Boasting intelligent features and unique extras, our excellent solutions offer the utmost in quality combined with the lowest utility costs for in-house laundries of all sizes. For total control of your laundry costs.



In-House Laundry

Optimise your internal resources with Electrolux Professional in-house solutions. Flexible programs give you full control over your laundry for superior results and the lowest cost per wash.



Marine Laundry

Durable Electrolux Professional laundry solutions are perfect for life at sea. Offering savings in time and running costs, they are flexible and easy to use, with a reduced impact on the environment. lagoon® Advanced Care, just one of our solutions, is the perfect alternative to dry-cleaning: gentle on all fabrics using no chemical solvents only biodegradable detergents.

Washer Extractors

Line 6000 and Line 5000

Line 6000

Washer Extractors
Soft Mount
H Spin Range



	WH6-6	WH6-7	WH6-8	WH6-11	WH6-14	WH6-20	WH6-27	WH6-33
Segments	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H
Drum volume (l)	53	65	75	105	130	180	240	300
Dry weight capacity (kg/lb)	6/13	7/15	8/18	11/25	14/30	20/45	27/60	33/75
G-factor	530	450	450	450	450	450	450	450
Width (mm-in)	595 - 23 7/16"	720 - 28 3/8"	720 - 28 3/8"	830 - 32 11/16"	910 - 35 13/16"	970 - 38 3/16"	1020 - 40 3/16"	1020 - 40 3/16"
Depth (mm-in)	681 - 26 13/16"	721 - 28 3/8"	721 - 28 3/8"	757 - 29 13/16"	821 - 32 5/16"	947 - 37 5/16"	990 - 39"	1134 - 44 5/8"
Height (mm-in)	832 - 32 3/4"	1132 - 44 9/16"	1132 - 44 9/16"	1212 - 47 11/16"	1340 - 52 3/4"	1426 - 56 1/8"	1462 - 57 9/16"	1462 - 57 9/16"
Electric/Steam/ Non-heated	x / - / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Number of detergent pumps	5	15	15	15	15	15	15	15
Front loaded detergent box	●	-	-	-	○	○	○	○
Top loaded detergent box	-	○	○	○	○	○	○	○
ClarusVibe	-	●	●	●	●	●	●	●
Compass Pro	●	-	-	-	-	-	-	-
Automatic Savings	●	●	●	●	●	●	●	●
Intelligent Dosing	-	●	●	●	●	●	●	●
Power Balance	●	●	●	●	●	●	●	●
Integrated Savings	-	○	○	○	○	○	○	○
lagoon® Woolmark	○	-	-	-	○	○	○	○

● standard ○ option x available - not available

Line 5000

Washer Extractors
Soft Mount
H Spin Range



	W565H	W575H	W5105H	W5130H	W5180H	W5240H	W5300H
Segments	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H
Drum volume (l)	65	75	105	130	180	240	300
Dry weight capacity (kg/lb)	7/15	8/18	11/25	14/30	20/45	27/60	33/75
G-factor	450	450	450	450	450	450	400
Width (mm-in)	720 - 28 3/8"	720 - 28 3/8"	830 - 32 11/16"	910 - 35 13/16"	970 - 38 3/16"	1020 - 40 3/16"	1020 - 40 3/16"
Depth (mm-in)	721 - 28 3/8"	721 - 28 3/8"	757 - 29 13/16"	821 - 32 5/16"	947 - 37 5/16"	990 - 39"	1134 - 44 5/8"
Height (mm-in)	1132 - 44 9/16"	1132 - 44 9/16"	1212 - 47 11/16"	1340 - 52 3/4"	1426 - 56 1/8"	1462 - 57 9/16"	1462 - 57 9/16"
Electric/Steam/ Non-heated	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x
Compass Pro®	●	●	●	●	●	●	●

Front and side panel in stainless steel as option. More information on product data sheet

● standard ○ option x available - not available

Washer Extractors

Line 5000

Line 5000 Washer Extractors Solid Mount N/S Spin Range



	W575N/S	W585N/S	W5105N/S	W5130N/S	W5180N/S	W5250N/S	W5330N/S
Segments	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H	A B C D E F G H
Drum volume (l)	75	85	105	130	180	250	330
Dry weight capacity (kg/lb)	8/18	9/20	11/25	14/30	20/45	28/62	35/75
G-factor (N/S)	100/200	100/200	100/200	100/200	100/200	100/200	100/200
Width (mm-in)	660 - 26"	660 - 26"	720 - 28 3/8"	720 - 28 3/8"	750 - 29 1/2"	830 - 32 11/16"	910 - 35 13/16"
Depth (mm-in)	681 - 26 13/16"	722 - 28 7/16"	697 - 27 7/16"	787 - 31"	914 - 36"	1029 - 40 1/2"	1114 - 43 7/8"
Height (mm-in)	1131 - 44 1/2"	1133 - 44 5/8"	1217 - 47 15/16"	1216 - 47 7/8"	1345 - 52 15/16"	1426 - 56 1/8"	1465 - 57 11/16"
Electric/Steam/ Non-heated	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x
Compass Pro®	●	●	●	●	●	●	●

Front and side panels in stainless steel as option. More information on product data sheets

● standard ○ option x available - not available

Line 5000 Washer Extractors Solid Mount X Spin Range



	W5280X	W5350X	W5600X
Segments	A B C D F G H	A B C D F G H	A B C D F G H
Drum volume (l)	280	350	600
Dry weight capacity (kg/lb)	28/62	35/77	60/135
G-factor	300	220	220
Width (mm-in)	933 - 36 3/4"	1115 - 43 7/8"	1173 - 46 3/16"
Depth (mm-in)	985 - 38 3/4"	1121 - 44 1/8"	1193 - 46 15/16"
Height (mm-in)	1456 - 57 5/16"	1570 - 61 13/16"	1673 - 65 7/8"
Electric/Steam/ Non-heated	-/x/x	x/x/x	x/x/x
Compass Pro®	●	●	●
Clarus Control®	○	○	○

Front and side panels in stainless steel as option.
More information on product data sheets

● standard ○ option x available - not available

Soft Mount machines Direct installation on all types of floors
Solid Mount machines Need to be fixed to the floor

G factor

N Normal Spin 100 G
S Super Spin 200 G
X Extra Spin 220 - 300 G
H High Spin 450 - 530 G

Segments

A Self-Service Laundry		E Care Laundry	
B Multi-Housing Laundry		F Facility Management Laundry	
C Commercial Laundry		G Hospitality Laundry	
D Commercial Laundry		H In-House Laundry	

Washer Extractors

Generation 4000

Generation 4000
Washer Extractors
Soft Mount
H High Spin Range



	W4400H	W4600H	W4850H	W41100H
Segments	C D E F G H	C D E F G H	C D E F G H	C D E F G H
Drum volume (l)	400	600	850	1100
Dry weight capacity (kg/lb)	45/100	65/145	90/200	120/250
G-factor	350	350	350	300
Width (mm-in)	1325 - 52 3/16"	1390 - 54 1/2"	1640 - 64 9/16"	1640 - 64 9/16"
Depth (mm-in)	1450 - 57 1/16"	1585 - 62 1/2"	1635 - 64 3/8"	1850 - 72 13/16"
Height (mm-in)	1975 - 77 3/4"	1975 - 77 3/4"	2190 - 86 1/4"	2190 - 86 1/4"
Electric/Steam/Non-heated	x/x/x	x/x/x	-/x/x	-/x/x
Clarus Control®	●	●	●	●
Tilting	○	○	○	○

Front and side panels in stainless steel as option. More information on product data sheets

● standard ○ option x available - not available

Soft Mount machines **Solid Mount machines**

Direct installation on all types of floors Need to be fixed to the floor

G factor

N Normal Spin 100 G
S Super Spin 200 G
X Extra Spin 220 - 300 G
H High Spin 450 - 530 G

Segments

A Self-Service Laundry 	E Care Laundry 
B Multi-Housing Laundry 	F Facility Management Laundry 
C Commercial Laundry 	G Hospitality Laundry 
D Commercial Laundry 	H In-House Laundry 

Barrier Washers

Line 6000

Line 6000 Evolution Barrier Washers



	WB6-20	WB6-27	WB6-35
Segments	C E F G H	C E F G H	C E F G H
Drum volume (l)	200	270	350
Dry weight capacity (kg/lb)	20 / 44	27 / 60	35 / 77
G-factor	350	350	350
Width (mm-in)	915 - 36"	1050 - 41 5/16"	1270 - 50"
Depth (mm-in)	1030 - 40 9/16"	1030 - 40 9/16"	1030 - 40 9/16"
Height (mm-in)	1620 - 63 3/4"	1620 - 63 3/4"	1620 - 63 3/4"
Non-heated / Electric / Direct steam / Indirect Steam / Low pressure steam / Electric & steam / Gas	x/x/x/x x/x/x	x/x/x/x x/x/x	x/x/x/x x/x/x
Number of detergent signals	13	13	13
Detergent box	○	○	○
CompassPro	●	●	●
Double Compass Pro	○	○	○
Integrated Weighing System	○	○	○
Power balance	●	●	●
Automatic Inner Door Opening (AIDO)	○	○	○
Clean room construction	○	○	○

● standard ○ option x available - not available

Segments

A Self-Service Laundry		E Care Laundry	
B Multi-Housing Laundry		F Facility Management Laundry	
C Commercial Laundry		G Hospitality Laundry	
D Commercial Laundry		H In-House Laundry	

Barrier Washers

Line 5000 and Generation 4000

Line 5000 & Generation 4000



Side load Barrier Washers	WB5130H	WB5180H	WHB5500H	WPB4700H	WPB4900H	WPB41100H
Side load Washer Extractors				WP4700H	WP4900H	WP41100H
Segments	E F G H	C E F G H	C D E F G H	C D E F G H	C E F G H	C E F G H
Drum volume, l	130	180	500	690	890	1080
Dry weight capacity, kg/lb	13 / 30	18 / 40	50 / 110	70 / 154	90 / 198	110 / 242
G-factor	300	300	350	300	300	300
Width, mm	910 - 35 13/16"	970 - 38 3/16"	1300 - 51 3/16"	1496 - 58 7/8"	1726 - 67 15/16"	1956 - 77"
Depth, mm	875 - 34 7/16"	975 - 38 3/8"	1265 - 49 13/16"	1363 - 53 11/16"	1363 - 53 11/16"	1363 - 53 11/16"
Height, mm	1325 - 52 3/16"	1410 - 55 1/2"	1770 - 69 11/16"	2040 - 80 5/16"	2040 - 80 5/16"	2040 - 80 5/16"
Electric/Steam/Gas / Dual heating/Thermal Oil	x/x/-/-/-	x/x/-/-/-	x/x/x/x/-	x/x/-/-/x	x/x/-/-/x	x/x/-/-/x
Compass Pro®	●	●	●	-	-	-
Clarus TS®	-	-	○	●	●	●
Clean room construction	○	○	○	○	○	○

Front and side panels in stainless steel as option. More information on product data sheets
Consult your Electrolux Professional contact regarding special constructions for Barrier Washers

● standard ○ option x available - not available

Segments

A Self-Service Laundry		E Care Laundry	
B Multi-Housing Laundry		F Facility Management Laundry	
C Commercial Laundry		G Hospitality Laundry	
D Commercial Laundry		H In-House Laundry	

Tumble Dryers

Line 6000

Line 6000



	TD6-6	TD6-7	TD6-14	TD6-20
Segments	A B C D E F G H	A B C D E F G H	A B C D E G H	A C D E G H
Drum volume (l)	130	135	255	360
Dry weight capacity (kg/lb)	6 / 13	7 / 15	14 / 30	20 / 44
Width (mm-in)	597 - 23 1/2"	600 - 23 5/8"	793 - 31 1/4"	793 - 31 1/4"
Depth (mm-in)	725 - 28 5/16"	845 - 33 1/4"	965 - 38"	1202 - 47 5/16"
Height (mm-in)	839 - 33"	1050 - 41 5/16"	1771 - 69 3/4"	1771 - 69 3/4"
Electric/Gas/Heat Pump/Steam	x/-/-/-	x/x/x/-	x/x/x/x	x/x/x/x
Horizontal filter	-	●	●	●
Drum Speed control	-	-	○	○
Adaptive Fan control	-	-	○	○
Moisture Balance	-	○	○	○
Stainless steel drum /front/door/side plates	-	○	○	○
Galvanized steel drum /front/door/side plates	-	●	●	●
Compass Pro	●	●	●	●
Reversing drum	●	●	●	●
lagoon® Woolmark	-	○	○	○

Front and side panels in stainless steel as option. More information on product data sheets
Consult your Electrolux Professional contact regarding special Cleanroom constructions for Dryers

● standard ○ option x available - not available

Segments			
A Self-Service Laundry		E Care Laundry	
B Multi-Housing Laundry		F Facility Management Laundry	
C Commercial Laundry		G Hospitality Laundry	
D Commercial Laundry		H In-House Laundry	

Tumble Dryers

Line 5000 and Generation 4000

Line 5000



	T5190	T5190LE	T5290	T5300S	T5425S	T5550	T5675
Segments	A B C D E F G H	A B C D E F G H	A B C D E G H	A B C D G H	A C D E G H	A C D E G H	A C D E G H
Drum volume (l)	190	190	290	300	423	550	675
Dry weight capacity (kg/lb)	10.6/23	8.6/18	16.1/35.5	2x16.7/2x37	2x23.5/ 2x51.7	30.5/67.2	37.5/82.7
Width (mm-in)	721 - 28 3/8"	722 - 28 3/8"	713 - 28 1/8"	790 - 31 1/2"	868 - 34 3/16"	961 - 37 13/16"	961 - 37 13/16"
Depth (mm-in)	778 - 29 5/16"	777 - 28 9/16"	1210 - 47 5/8"	1115 - 43 7/8"	1325 - 52 3/16"	1365 - 53 3/4"	1560 - 61 7/16"
Height (mm-in)	1114 - 44 1/2"	1685 - 66 5/16"	1688 - 66 7/16"	1940 - 67 11/16"	2086 - 82 1/8"	1869 - 73 9/16"	1857 - 73 1/8"
Electric/Gas/Steam/Heat Pump	x/x/-/-	x/-/-/x	x/x/x/-	x/x/-/-	-/x/-/-	x/x/x/-	x/x/x/-
Energy (kWh/l) water evaporated* (Electric/Gas/Steam)	0.92/-/-	0.38/-/-	0.96/1.06/1.37	0.96/1.03/-	-/1.06/-	0.98/1.06/1.22	0.98/1.07/1.26
Compass Pro®	●	●	●	●	●	●	●
Residual Moisture Control	○	●	○	○	-	○	○
Reversing Drum Action	●	●	○	○	○	○	○
lagoon® Woolmark	-	-	-	-	-	○	○

Front and side panels in stainless steel as option. More information on product data sheets
Consult your Electrolux Professional contact regarding special Cleanroom constructions for Dryers

● standard ○ option x available - not available

Generation 4000



	T4900 T4900CR	T41200 T41200CR
Segments	C D E G H	C D E G H
Drum volume (l)	900	1200
Dry weight capacity (kg/lb)	50/110	66,7/147
Width (mm-in)	1290 - 50 13/16"	1290 - 50 13/16"
Depth (mm-in)	1295 - 51"	1485 - 58 7/16"
Height (mm-in)	2465 - 97"	2465 - 97"
Electric/Gas/Steam	x/x/x	x/x/x
Energy (kWh/l) water evaporated* (Electric/Gas/Steam)	1.2/1.16/1.91	1.17"/1.23/1.64
Selecta Control®	●	●
Residual Moisture Control	○	○
Reversing Drum Action	●	●
Sliding door	○	○
Tilting	○	○

Segments

A Self-Service Laundry		E Care Laundry	
B Multi-Housing Laundry		F Facility Management Laundry	
C Commercial Laundry		G Hospitality Laundry	
D Commercial Laundry		H In-House Laundry	

Front and side panels in stainless steel as option. More information on product data sheets

T4900CR and T41200CR are specially designed for Cleanroom environment

* At rated capacity 100 % cotton load at 50 % initial moisturedried to 0 %

** Test load 48 kg/100 lbs

● standard ○ option x available - not available

Ironers

Line 6000



	Front delivery		
	Basic	LF	FLF
Cylinder length			
1900 mm	IC64819	IC64819LF	IC64819FLF
2100 mm	IC64821	IC64821LF	IC64821FLF
2500 mm	IC64825	IC64825LF	IC64825FLF
2800 mm	IC64828	IC64828LF	IC64828FLF
3200 mm	IC64832	IC64832LF	IC64832FLF
Segments	C D E G H	C D E G H	C D E G H
Width			
1900 mm	2575	2575	2575
2100 mm	2785	2785	2785
2500 mm	3205	3205	3205
2800 mm	3415	3415	3415
3200 mm	3835	3835	3835
Height			
All length	1270	1270	1460
Depth			
All length	1070	1070	1280
Options to facilitate the Feeding			
Feed Alone + Vacuum Table	○	○	-
Vacuum Table	○	○	●
Options to facilitate the Folding			
Antistatic Bar	○	●	●
Options to boost Productivity			
Feed Now	○	○	-
Dubixium	○	○	○
DIAMMS	○	○	●
Evaporation Capacity in liter per hour			
Cylinder length	Electrical heated	Gas heated	Steam heated (10bars)
1900 mm	38	35	57
2100 mm	40	37	63
2500 mm	48	46	75
2800 mm	51	51	81
3200 mm	59	59	93

The ironing speed on IC648XX serie is from 0,5 to 11m/mn to improve the performance, the productivity, and the energy consumption, the speed have to be adjusted to dry and iron the linen in one way. Many parameters have to be take in consideration to adjust the speed:

- residual moisture of the fiber (link with final speed performance for the washer)
- specification of the linen (Cotton or Polyester/cotton, 140gr/m² or 160grs/m² or more)
- single layer of multiple layer

The DIAMMS is a perfect option to "take control" of the ideal ironing speed as it touches and measures the residual moisture at the end of the drying process and adjusts accordingly to ensure quality and performance

● standard ○ option x available - not available

Ironers

Line 6000



	Rear delivery			All in One
	Rear	RLF	FRLF	FFS
Cylinder length				
1900 mm	IC64819R	IC64819R	N/A	IC64819FFS
2100 mm	IC64821R	IC64821R	N/A	N/A
2500 mm	IC64825R	IC64825R	N/A	IC64825FFS
2800 mm	IC64828R	IC64828R	IC64828FRLF	N/A
3200 mm	IC64832R	IC64832R	IC64832FRLF	IC64832FFS
Segments	C D E G H	C D E G H	C D E G H	C D E G H
Width				
1900 mm	2575	2575	N/A	3555
2100 mm	2785	2785	N/A	N/A
2500 mm	3205	3205	N/A	4185
2800 mm	3415	3415	3415	N/A
3200 mm	3835	3835	3835	4815
Height				
All length	1270	1270	1460	1590
Depth				
All length	2540	2505	2715	1820
Options to facilitate the Feeding				
Feed Alone + Vacuum Table	<input type="radio"/>	<input type="radio"/>	-	-
Vacuum Table	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Options to facilitate the Folding				
Antistatic Bar	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Options to boost Productivity				
Feed Now	<input type="radio"/>	<input type="radio"/>	-	-
Dubixium	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
DIAMMS	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>
Evaporation Capacity in liter per hour				
Cylinder length	Electrical heated	Gaz heated	Steam heated (10bars)	
1900 mm	38	35	57	
2100 mm	40	37	63	
2500 mm	48	46	75	
2800 mm	51	51	81	
3200 mm	59	59	93	

The ironing speed on IC648XX serie is from 0,5 to 11m/mn to improve the performance, the productivity, and the energy consumption, the speed have to be adjusted to dry and iron the linen in one way. Many parameters have to be take in consideration to adjust the speed:

- residual moisture of the fiber (link with final speed performance for the washer)
- specification of the linen (Cotton or Polyester/cotton, 140gr/m² or 160grs/m² or more)
- single layer of multiple layer


The DIAMMS is a perfect option to "take control" of the ideal ironing speed as it touches and measures the residual moisture at the end of the drying process and adjusts accordingly to ensure quality and performance

● standard ○ option x available - not available

Ironers

Line 5000

Line 5000 Hot Cylinder Ironers



	IC43316	IC43320
Segments	C D E G H	C D E G H
Roll diameter (mm/in)	325 / 13	325 / 13
Ironing width (mm/in)	1650 / 65	2065 / 81
Width (mm-in)	2030 - 79 15/16"	2445 - 96 1/4"
Depth (mm-in)	690 - 27 3/16"	690 - 27 3/16"
Height (mm-in)	1145 - 45 1/16"	1145 - 45 1/16"
Electric / Steam / Gas	x / - / x	x / - / x
Evaporation capacity (l/h)	19.5	24.5
Speed (m/minute)	0.5 to 5.5	0.5 to 5.5
Ironer Moisture	o	o
Dubixium™*	-	-
Automatic feeding	-	-
Automatic folding	-	-

Line 5000 Warm Cylinder Ironers



	IB42310	IB42314	IB42316
Segments	C D E G H	C D E G H	C D E G H
Roll diameter (mm/in)	230 / 9	230 / 9	230 / 9
Ironing width (mm/in)	1000 / 39	1400 / 55	1650 / 64
Width (mm-in)	1395 - 54 15/16"	1795 - 70 1/16"	2045 - 80 1/2"
Depth (mm-in)	510 - 20 1/16"	510 - 20 1/16"	510 - 20 1/16"
Height (mm-in)	1025 - 40 3/8"	1025 - 40 3/8"	1025 - 40 3/8"
Electric	x	x	x
Evaporation capacity (l/h)	5	6.8	8.1
Speed (m/minute)	3.4	3.4	3.4

* For electric and gas heated versions

Line 5000 Chest Ironers



	IB5 700	C-flex 900	C-flex 1200
Segments	C D E G H	C D E G H	C D E G H
Roll diameter (mm/in)	700 / 27	900 / 35	1200 / 47
Number of rolls	1 (steam or gas)	1 to 3 (steam) 1 to 2 (gaz)	1 to 3 (steam) 1 to 2 (gaz)
Ironing speed	From 3 to 12 m/mn Optional up to 16 m/mn	From 5 to 20 m/mn single roll From 12 to 51 m/mn (3 rolls)	From 5 to 24 m/mn single roll From 12 to 51 m/mn (3 rolls)
Ironing width (mm/in)	2500/3000/3300 steam or gas or electrical	2700/3000/ 3300/3500 (steam) 3300 (gas)	2100/3000/ 3300/3500 (steam) 3300 (gas)
Width (mm/in)	3750/4250/4550	3900/4200/ 4500/4700	3300/4200/ 4500/4700
Depth	2036	1685/3325/4665 (steam) 2335/3750 (gas)	1985/3995/5665 (steam) 2600/4350 (gas)
Height	1453	1560 (steam) 1660 (gas 1 roll) 1780 (gas 2 rolls)	1780 (steam) 1880 (gas) 1960 (gas 2 rolls)
Electrical/Steam/gaz/ thermal oil	x/x/x/-	-/x/x/x	-/x/x/x
Evaporation capacity (l/h)	125	205 to 795 (steam 14 bars) 220 to 490 (gaz)	210 to 1260 (steam 14 bars) 300 to 660 (gaz)

Segments

A Self-Service Laundry	
B Multi-Housing Laundry	
C Commercial Laundry	
D Commercial Laundry	
E Care Laundry	
F Facility Management Laundry	
G Hospitality Laundry	
H In-House Laundry	

Finishing equipment to meet all your needs

Tables



FIT1 Folding Table
with manual boiler (2 hours) + iron



FIT2B Vacuum Ironing Table
with integrated automatic boiler



FIT1-WC Vacuum/Blowing Table
(left ended) without boiler

Finisher



FSF3 Pressing Shirt Finisher



FFT-WC Jacket Multiform Finisher



FTT2 Trousers Topper

Spotting units



FSU7 Pre-Spotting Portable Table



FSU4 Pre-Spotting and Pre-Brushing
Cabinet with vacuum

Boiler



FSB24C Boiler 24 kW
with condensate collecting tank

Presses



FPA6-WC Collar and Cuff Press



FPA1-WC Automatic Laundry Press with universal shape



FPA3-WC Automatic Laundry Mushroom Press



FPA1-D Automatic Cleaning Press with universal shape

Finishing Cabinet



FC48 Finishing Cabinet 8 hangers

Marking Machine



Y150 Marking Machine

This is a selection of the key finishing products. A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available. Ask your local office!

Our service network for your satisfaction

No matter where your business is located. **Electrolux Professional stands ready**, everywhere, along with its reliable technicians, its networked service and its tailored solutions. For a lifetime partnership that suits you. Because with Electrolux Professional, **you never work alone**. We are committed to supporting you with a unique service network that makes **your work-life easier**.

- ▶ **149 Countries served**
A widespread service network applying the same, client-related approach. Operating in 149 countries all over the world, with Electrolux Professional as a unique contact point.
- ▶ **2.200 Authorized service partners**
The most extensive, structured service network in the world to keep your appliances performing, supporting you in any circumstance.
- ▶ **10.000 Service engineers**
Our trustworthy ambassadors, 10.000 service engineers, taking care of your equipment and providing you with the assistance you need.



Excellence is central to everything we do.
By anticipating our customers' needs, we strive for
Excellence with our people, innovations, solutions and services.
To be the OnE making our customers' work-life easier,
more profitable – and truly sustainable every day.

Follow us on



www.electroluxprofessional.com

Excellence with the environment in mind

- ▶ All our factories are ISO 14001-certified
- ▶ All our solutions are designed for low consumption of water, energy, detergents and harmful emissions
- ▶ In recent years over 70% of our product features have been updated with the environmental needs of our customers in mind
- ▶ Our technology is RoHS and REACH compliant and over 95% recyclable
- ▶ Our products are 100% quality tested by experts

