

## Digital Cabinets 1 Glass Door Wine Refrigerator, 170 bottles, black

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



720018 (WC170BKMZA)

1-glass door wine refrigerator,  
170 bottles, (R600A), black

### Short Form Specification

**Item No.** \_\_\_\_\_

1 glass door refrigerator. Exterior in black painted steel. Dark interior with rounded corners and 45mm thick insulation.

Double glass door, UV-treated with security lock.

Built-in refrigeration unit; LED digital temperature display. White LED internal light. Cell temperatures: from 5° to 22°C.

For ambient temperatures up to 38°C. HCFC and CFC free insulation and R600 refrigerant gas.

PE coated. Max. capacity: up to 170 bottles (750ml - bordeaux bottle).

### Main Features

- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Simple refrigeration system easily accessible from the rear of the units.
- Attractive presentation through glass door and lighting.
- Crystal white LED internal lights.
- Black UV-Treated glass door and dark storage area to not damage the wines.
- Unit features adjustable in height wooden shelves that allow different positioning of the bottles (vertical or horizontal).
- Vibration reduction system to avoid prematurely aging of the wines.
- Unit features audio and visual alarm.
- Can storage up to 170 bottles (750ml - bordeaux bottle).
- Unit can be set as a single-zone refrigerator, setting top and bottom at the same temperature or as a multi-temp refrigerator to serve different varieties at their perfect individual drinking temperatures.
- Air circulation inside the cavity allows to keep ideal humidity level for corks and labels.
- Performance guaranteed at ambient temperatures of +38 °C.
- Internal back panel has a drilled texture that allows the bottles to not be in direct contact with the evaporator avoiding the wine inside the bottles to freeze.
- The light inside the chamber can be set always "on" or "on/off" depending on the door is open/close.
- Maximum number of bottles in hospitality mode (standing upright bottles, for service) = 120 bottles
- Maximum number of bottles in storage mode (stacked bottles, for storage) = 198 bottles

### Construction

- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R600a).
- LED digital temperature display.
- Reversible door with security lock.
- The rubber feet of the compressor and the wooden material of the shelves reduce vibration.
- Oakwood shelves.
- Maximum number of shelves: 11.

### Included Accessories

- 1 of Wooden display shelf for 1-glass door PNC 880551 wine refrigerator, 170 bottles
- 6 of Wooden shelf for 1-glass door wine PNC 880554 refrigerator, 170 bottles

APPROVAL: \_\_\_\_\_


- 1 of Charcoal filter for 1-glass door wine refrigerator, 170&300 bottles PNC 880561

### Optional Accessories


- Wooden display shelf for 1-glass door wine refrigerator, 170 bottles PNC 880551
- Wooden shelf for 1-glass door wine refrigerator, 170 bottles PNC 880554
- Charcoal filter for 1-glass door wine refrigerator, 170&300 bottles PNC 880561



### Front

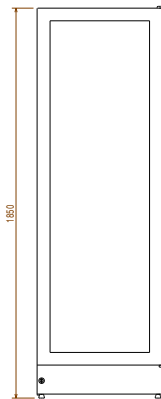


### Side

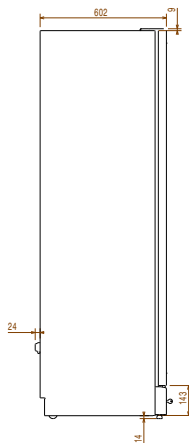


EI = Electrical inlet (power)  
RI = Refrigerant Inlet  
RO = Refrigerant Outlet

### Top



### Other



### Electric

Supply voltage:  
720018 (WC170BKMZA) 220-240 V/1N ph/50 Hz  
Electrical power max.: 0.2 kW

### Key Information:

Gross capacity: 414 lt  
Capacity: 197 lt / Bottle .75L Bordeaux  
Door hinges:  
External dimensions, Width: 595 mm  
External dimensions, Height: 1850 mm  
External dimensions, Depth with Doors Open: 1180 mm  
Internal Dimensions (depth): 460 mm  
Internal Dimensions (height): 1600 mm  
Internal Dimensions (width): 495 mm  
Number and type of grids (included): 6+1 -  
Type of external material: Black Prepainted Steel

### Refrigeration Data

Control type: Digital  
Compressor power:  
Refrigerant type: R600a  
Refrigeration power: 69 W  
Refrigerant weight: 65 g  
Min/Max internal humidity: 30/80  
Operating temperature min.: 5 °C  
Operating temperature max.: 22 °C  
Operating mode: Ventilated/Static  
Cooling unit: Built-In  
Defrost type: Automatic