

## Ice Cuber 130kg/24h with 65kg bin Ice maker, air-cooled with drain pump

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



730280 (IC130B65G)

\* NOT TRANSLATED \*

### Short Form Specification

Item No. \_\_\_\_\_

Plastic flap on the front, top and sides in 304 AISI stainless steel.  
The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R404a refrigerant. Container capacity Kg: 65.

### Main Features


- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Height adjustable stainless steel feet.
- Air filters are easily removable and cleanable without tools.
- Reduced energy consumption by fully insulated storage bin.
- Bin integrated as standard.
- Ice cube cone shape with the trunk sides slightly squashed.
- Model available in air-cooled version.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Operates over a wide range of temperatures.
- Fully automatic in operation.
- Compliant to CE requirements for safety.

### Construction


- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- ON-OFF rocker switch.
- Built-in drain pump.
- Internal ice cubes container in ABS.
- Stainless steel spray arms removable without the use of tools.
- AISI 304 stainless steel exterior.
- Easy access to the main components for maintenance.
- Rounded internal corners for ease of cleaning.

APPROVAL: \_\_\_\_\_

### Front

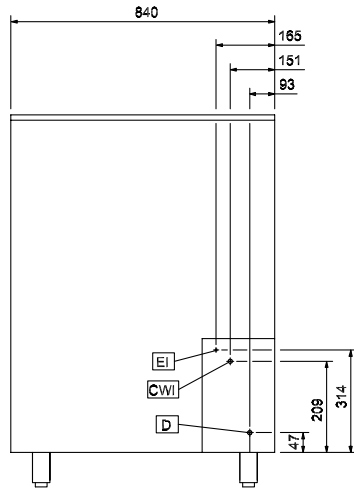


### Side

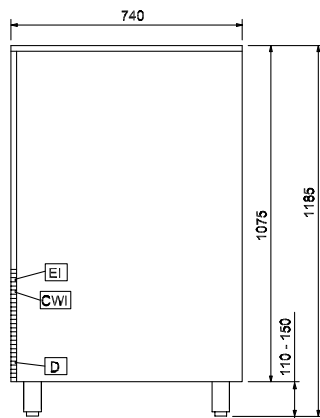

- CW11** = Cold Water inlet 1  
(cleaning)  
**D** = Drain  
**EI** = Electrical inlet (power)

### Top

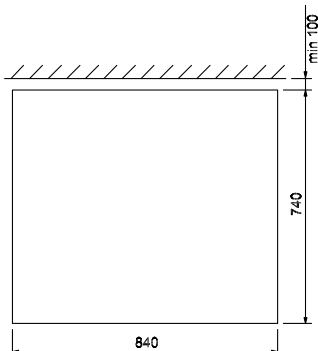

### Electric

#### Supply voltage:

730280 (IC130B65G) 220-240 V/1 ph/50 Hz

#### Electrical power max.:

1.25 kW

### Capacity:

Bin capacity: 65 kg

### Key Information:

External dimensions, Width: 840 mm

External dimensions, Height: 1075 mm

External dimensions, Depth: 740 mm

Net weight: 113 kg

Output: 134 kg/day

Kind of cube: Ice Cube 18 g

### Refrigeration Data

Refrigerant type: R452A

# ALPENINOX

**Ice Cuber  
130kg/24h with 65kg bin Ice  
maker, air-cooled with drain pump**



**Ice Cuber  
130kg/24h with 65kg bin Ice maker, air-cooled with drain pump**  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2020.12.04