

# ALPENINOX

## Crio Smart 2 Half Door Digital Stainless Steel Freezer, 670lt (-22/-15) - 60Hz

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



727433 (RE472HF60)

2-half door freezer  
670L, -22-15°C, (R404A),  
digital, stainless steel - UK  
plug

### Main Features

- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Automatic defrost.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Rilsan coated grids for improved protection.
- Right hinged two 1/2 doors.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

APPROVAL: \_\_\_\_\_

## Construction

- External back panel in galvanized steel.
- Refrigerant type: R404a.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- CFC and HCFC-free insulation.
- Interior base with rounded corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Doors are self-closing and can be fully opened up to 180°.
- Delivered with UK plug.
- Lockable door.


## Included Accessories

- 3 of 2/1GN gray rilsan grid with 2 runners PNC 881020


## Optional Accessories

- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242
- Spacer for 670L and 1430L refrigerated cabinets PNC 880248
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Pedal opening for cabinets PNC 880324
- Plastic container with false bottom, 1/1GN PNC 880705
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125mm, NOT for glass door and remote models PNC 881002
- 2/1GN gray rilsan grid PNC 881004
- AISI 304 stainless steel grid, 2/1GN PNC 881016
- AISI 304 stainless steel grid with 2 runners, 2/1GN PNC 881018
- 2/1GN gray rilsan grid with 2 runners PNC 881020
- Set of 2 stainless steel runners for 670/1430L refrigerators and freezers PNC 881021
- 2/1GN perforated shelf PNC 881042
- 1/1GN rilsan steel wire basket h150mm PNC 881043

### Front

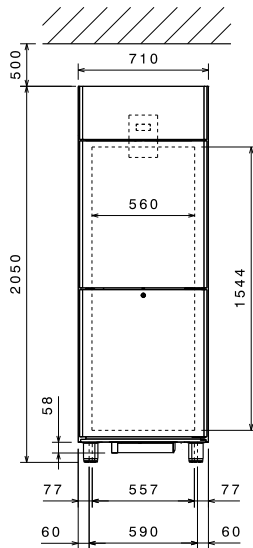


### Side

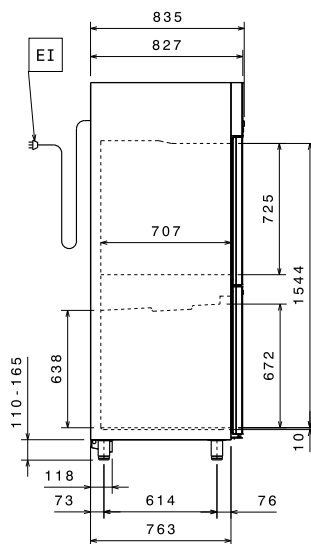

EI = Electrical inlet (power)

### Top



### Electric

Supply voltage:

727433 (RE472HF60) 220 V/1 ph/60 Hz

Electrical power max.: 0.58 kW

### Key Information:

Gross capacity: 670 lt

Door hinges:

External dimensions, Width: 710 mm

External dimensions, Height: 2050 mm

External dimensions, Depth: 835 mm

External dimensions, Depth with Doors Open: 1480 mm

Number and type of doors: 2x1/2 Full

Number and type of grids (included): 3 - GN 2/1

Type of external material: Stainless Steel

Type of internal material: Stainless Steel

Internal panels material: Stainless Steel

Number of positions & pitch: 44; 30 mm

### Refrigeration Data

Control type: Digital

Refrigerant type: R404A

Refrigeration power: 530 W

Refrigeration power at evaporation temperature: -30 °C

Operating temperature min.: -15 °C

Operating temperature max.: -22 °C

Operating mode: Ventilated