

Ice Cuber 21kg/24h with 4kg bin - Water self continuous cuber - 60Hz

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



730577 (FGC24WB)

Water cooled ice cuber with
4kg bin, 21kg/24h (60Hz)
(R452a)

Short Form Specification

Item No. _____

AISI 304 stainless steel exterior. Food grade ABS interior. Stainless steel spray arms removable without the use of tools. Fully automatic in operation. Efficient water cooling system. Suitable for gravity drain only. Flexible water supply and drain hoses. A spray system produces solid, crystal clear ice cubes.

Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.

Self-contained storage bin capacity: 4 Kg.

Main Features


- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Model available in water-cooled version.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.

Construction


- AISI 304 stainless steel exterior.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Internal ice cubes container in ABS.
- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- Stainless steel spray arms removable without the use of tools.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: _____

Front

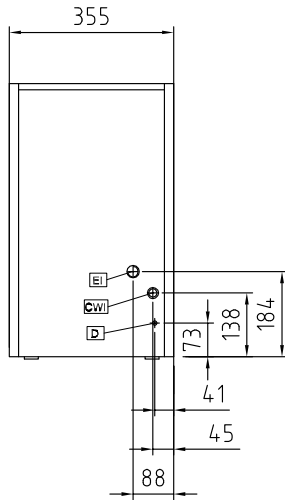


Side

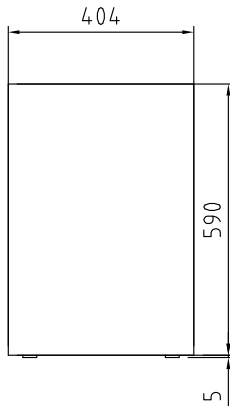

- CW1** = Cold Water inlet 1
(cleaning)
D = Drain
EI = Electrical inlet (power)

Top

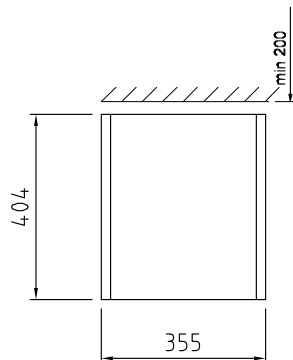

Electric

Supply voltage:

730577 (FGC24WB) 230 V/1N ph/60 Hz

Electrical power max.:

0.32 kW

Capacity:

Bin capacity: 4 kg

Key Information:

External dimensions, Width: 355 mm

External dimensions, Depth: 404 mm

External dimensions, Height: 595 mm

Net weight: 28 kg

Output: 21 kg/day

Kind of cube: Ice cube 13 g

Sustainability

Noise level: 59,1 dBA

Refrigerant type: R452A