

## Ice Cuber 28kg/24h with 9kg bin - Water self continuous cuber

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



730562 (FGC29WB)

Ice maker, cube, 28kg/24h, self-contained, 9kg ice collection bin included, water-cooled (ice cube: 33gr) (R452a)

### Short Form Specification

Item No. \_\_\_\_\_

Plastic flap on the front, top and sides in ABS. The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R452A refrigerant. Container capacity Kg: 9.

### Main Features


- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only.
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Model available in water-cooled version.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Compliant to CE requirements for safety.

### Construction


- Easy access to the main components for maintenance.
- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: \_\_\_\_\_

### Front

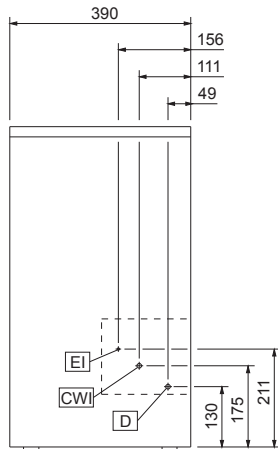


### Side

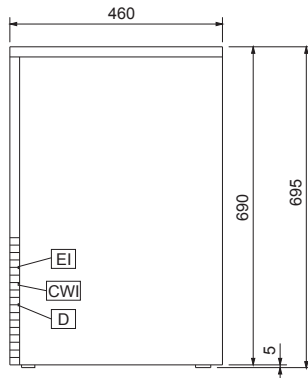

- CW11** = Cold Water inlet 1  
(cleaning)  
**D** = Drain  
**EI** = Electrical inlet (power)

### Top



### Electric

<b>Supply voltage:</b>	
730562 (FGC29WB)	220-240 V/1N ph/50 Hz
<b>Electrical power max.:</b>	0.37 kW

### Capacity:

<b>Bin capacity:</b>	9 kg
----------------------	------

### Key Information:

<b>External dimensions, Width:</b>	390 mm
<b>External dimensions, Depth:</b>	460 mm
<b>External dimensions, Height:</b>	695 mm
<b>Net weight:</b>	37 kg
<b>Output:</b>	28 kg/day
<b>Kind of cube:</b>	Ice Cube 33 g

### Sustainability

<b>Noise level:</b>	55,6 dBA
<b>Refrigerant type:</b>	R452A