# ALPENINOX

### **Pastry and Bakery Line** 4 Door Freezer Counter, -24°/-10° C, 600X400 grid

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



728870 (AFX644DFF)

4-door freezer counter, 600x400mm grids, -18-24°C, (R452A), AISI 304

## **Short Form Specification**

### Item No.

Internal and external doors, front and side panels in AISI 304 stainless steel. Stainless steel worktop. Four reversible doors. Frontal access for easy maintenance. Uniformity of temperature guaranteed by the position of the evaporator and the design of the internal ventilation.

Completely automatic defrosting.

Freezer counter has operating temperature that can be adjusted from -18°

Supplied with 12 pairs of runners 600x400mm.

### **Main Features**

- Frontal access for easy maintenance.
- · Pressed stainless steel door handle without joints gathering dust and dirt.
- Completely automatic defrosting.
- · Automatic evaporation of the defrosting water by heating element.
- Suitable for use in ambient temperature of up to 40°C (climatic class 5).
- Large digital digit display with cabinet temperature display and setting.
- Internal runners removable without any tools for faster cleaning operations.
- Adjustable temperature range from -18°C to -24°C.

### Construction

- On site reversible left/right doors.
- Stainless steel AISI 304 inside and outside (except background).
- · Insulation thickness: 50 mm wall insulation.
- The position of the evaporator and the design of the internal ventilation facilitate the uniformity of the temperature.
- Environmentally friendly: R452a as refrigerant gas.

### **Included Accessories**


TE OF Full OF E Turnion, OCCATOONIN	140 12001 1
• 12 of Pair of L runner, 600x400mm Pl	NC 728874

•	Pair of L runner, 600x400mm	PNC 728874 □
•	Stainlees steel grid, 600x400mm for pastry counters	PNC 728876 ☐

<b>APPROVAI</b>	L
-----------------	---

## **ALPENINOX**

## Pastry and Bakery Line 4 Door Freezer Counter, -24°/-10° C, 600X400 grid

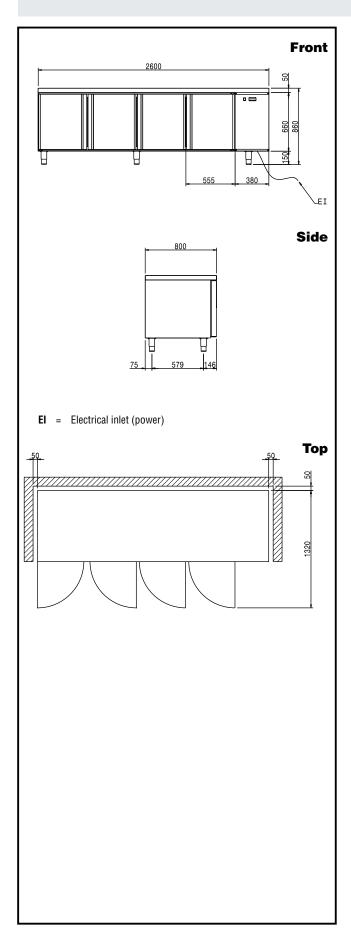

### **Electric**

Supply voltage:

728870 (AFX644DFF) 230 V/1N ph/50 Hz

Electrical power max.: 0.69 kW

### **Key Information:**

680 It **Gross capacity:** N° of doors: 4 Door hinges: 2 Right External dimensions, Width: 2600 mm External dimensions, Height: 860 mm External dimensions, Depth: 800 mm

External dimensions, Depth with Doors Open:

1320 mm

Stainless Steel AISI 304 Scotch

Type of external material: Type of internal material: 304 AISI Internal side panels material: 304 AISI

### **Refrigeration Data**

Control type: Electronic Refrigerant type: R452A Refrigeration power at -30 °C evaporation temperature:

Operating temperature min.: -24 °C Operating temperature max.: -18 °C

### **Product Information (EU Regulation** 2015/1094)

**Energy Class:** 

Yearly and daily energy

consumption: 5720kWh/year - 16kWkWh/24h

Climate class: Heavy Duty (5)

**Energy Efficiency Index (EEI):** 108

Type of model: counter frozen

Pastry and Bakery Line 4 Door Freezer Counter, -24°/-10°C, 600X400 grid



### **Pastry and Bakery Line** 4 Door Freezer Counter, -24°/-10° C, 600X400 grid

**EU energy labelling from 1st July 2016**The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

