

## 400 Line 400lt Line Refrigerator 1 Door (White) 60Hz


ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

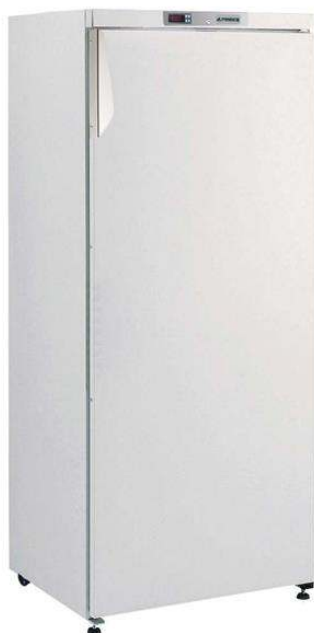

730104 (R04PVFW6)

1-door refrigerator 400lt,  
0+10°C, prepainted white,  
60Hz

### Short Form Specification

**Item No.** \_\_\_\_\_

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display. For ambient temperatures up to 43°C. HCFC, CFC and HFC free insulation and R134a refrigerant gas. With 2 front feet and 2 back wheels.

Supplied with n. 4 grids 600x400mm, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.
- Model requires only 1 phase 220V-60Hz supply and can be plugged straight into an existing power socket.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

### Sustainability

- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

### Included Accessories


- 2 of Pair of white grids for 400L refrigerators PNC 880292

### Optional Accessories


- Pair of white grids for 400L refrigerators PNC 880292
- PVC container with false bottom for 400L PNC 881072

APPROVAL: \_\_\_\_\_

### Front

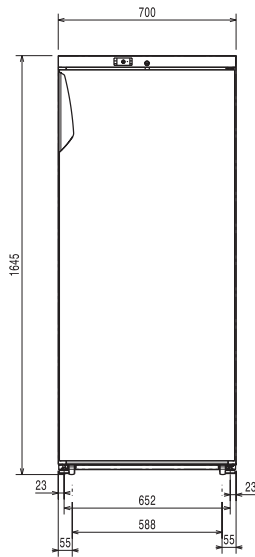


### Side

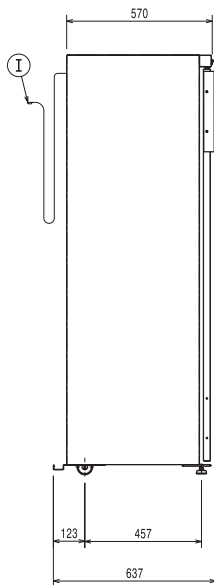

EI = Electrical inlet (power)

### Top



### Electric

Supply voltage:	730104 (R04PVFW6)	220-230 V/1 ph/60 Hz
Electrical power max.:		0.15 kW

### Key Information:

Gross capacity:	400 lt
Door hinges:	Right Side
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
External dimensions, Height:	1645 mm
Number and type of grids (included):	4 - 600x400
Type of external material:	Prepainted Steel
External door material:	Prepainted Steel

### Refrigeration Data

Control type:	Digital
Compressor power:	1/6 hp
Refrigeration power at evaporation temperature:	-10 °C
Min/Max internal humidity:	70%/84%
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Cooling unit:	Built-In
Defrost type:	Automatic (air)

### Sustainability

Noise level:	55 dBA
Refrigerant type:	R134a
Refrigeration power:	352 W
Refrigerant weight:	210 g