

400 Line 400lt Line Freezer, 1 Door (White) 60Hz


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

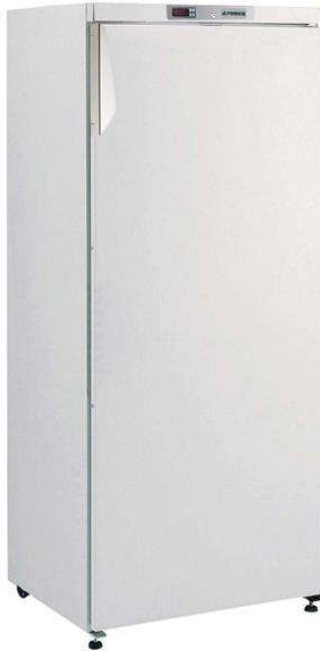

730105 (R04FSFW6)

1-door freezer 400lt, -15-24°C,
prepainted white - 60Hz

Short Form Specification

Item No. _____

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R404a refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

APPROVAL: _____

Main Features

- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 ° C.
- Model requires only 1 phase 220V-60Hz supply and can be plugged straight into an existing power socket.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).


Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.


Optional Accessories

- PVC container with false bottom for 400L PNC 881072

Front

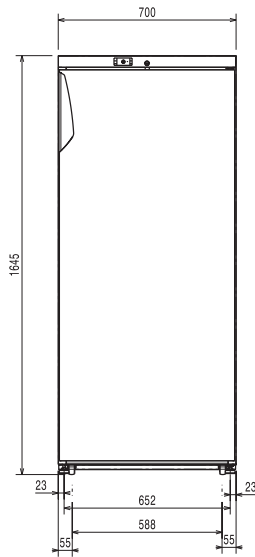


Side

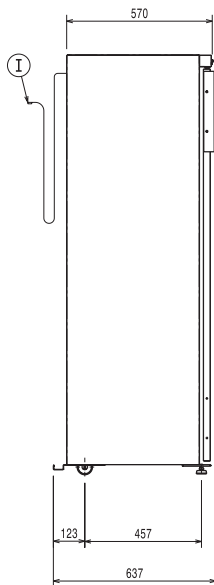

EI = Electrical inlet (power)

Top



Electric

Supply voltage:

730105 (R04FSFW6) 220-230 V/1 ph/60 Hz

Electrical power max.:

0.48 kW

Key Information:

Gross capacity: 400 lt

Door hinges:

External dimensions, Width: 700 mm

External dimensions, Height: 1645 mm

External dimensions, Depth with Doors Open: 1310 mm

Noise level: 56 dBA

Number and type of grids (included): - ;600x400

Type of external material: Prepainted Steel

External door material: Prepainted Steel

Refrigeration Data

Control type: Digital

Compressor power: 1/2 hp

Refrigerant type: R404A

Refrigeration power: 712 W

Refrigeration power at evaporation temperature: -23.3 °C

Refrigerant weight: 240 g

Operating temperature min.: -24 °C

Operating temperature max.: -15 °C

Operating mode: Static

Cooling unit: Built-In

Defrost type: Manual