

400 Line 1 Door Refrigerator (0/+10) - Stainless steel, 60Hz (Marine)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



730101 (R04PVF4M)

1-door refrigerator, 400 lt, 430
AISI, ventilated, 0+10°C -
60Hz (Marine)

Short Form Specification

Item No. _____

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display. For ambient temperatures up to 43°C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids 600x400mm, PE coated.

Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

Included Accessories


- 2 of Pair of white grids for 400L refrigerators PNC 880292

Optional Accessories


- Pair of white grids for 400L refrigerators PNC 880292
- Kit of wheels for 400L refrigerators PNC 880348
- PVC container with false bottom for 400L PNC 881072

APPROVAL: _____

Front

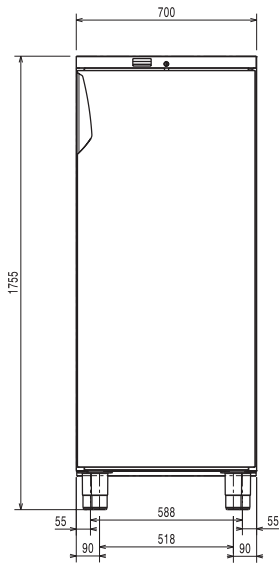


Side

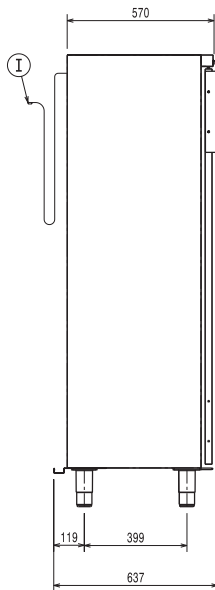

EI = Electrical inlet (power)

Top

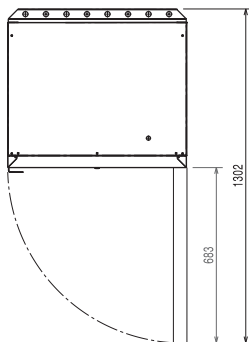

Electric

Supply voltage:

730101 (R04PVF4M)

220-230 V/1 ph/60 Hz

Electrical power max.:

0.15 kW

Key Information:

Gross capacity: 400 lt

N° of doors: 1

Door hinges:

External dimensions, Width: 700 mm

External dimensions, Height: 1755 mm

External dimensions, Depth: 620 mm

External dimensions, Depth with
Doors Open: 1310 mm

Noise level: 55 dBA

Number and type of grids
(included):

4 - 600x400

Type of external material:

Stainless Steel

Type of internal material:

Polystyrene

External side panels:

Stainless Steel

External top panels:

Stainless Steel

External door material:

Stainless Steel

Internal panels material:

Polystyrene

Internal side panels material:

Polystyrene

Refrigeration Data

Control type: Digital

Refrigerant type: R134a

Refrigeration power at
evaporation temperature:

-10 °C

Refrigerant weight:

210 g

Min/Max internal humidity:

70%/85%

Operating temperature min.:

0 °C

Operating temperature max.:

10 °C

Operating mode:

Ventilated

Cooling unit:

Built-In

Defrost type:

Automatic (air)