

## 400 Line 1 Glass Door Refrigerator (0/+10) - Stainless steel (R600a)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



729446 (A4PVFW)

1-glass door refrigerator 400L, 0+10°C, (R600A), stainless steel, ventilated

### Short Form Specification

**Item No.** \_\_\_\_\_

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged glass door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display; internal lighting. For ambient temperatures up to 32°C. HCFC, CFC and HFC free insulation and R600a refrigerant gas.

Supplied with n. 4 grids mm600x400, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Suitable for use in ambient temperatures of up to 32 °C.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R600a).


### Included Accessories

- 2 of Pair of white grids for 400L refrigerators PNC 880292


### Optional Accessories

- Pair of white grids for 400L refrigerators  PNC 880292
- Kit of wheels for 400L refrigerators  PNC 880348
- PVC container with false bottom for 400L  PNC 881072

APPROVAL: \_\_\_\_\_

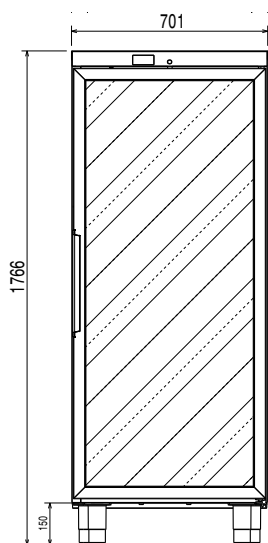


**Front**

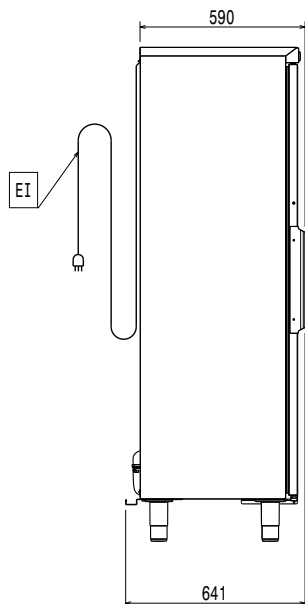

**Side**

EI = Electrical inlet (power)

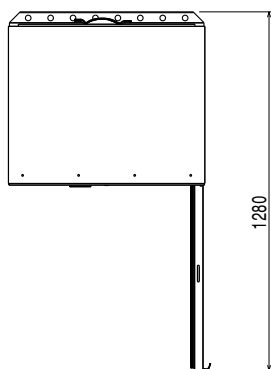

**Top**

### Electric

Supply voltage:	220-240/1 ph/50 Hz
729446 (A4PVFW)	
Electrical power max.:	0.13 kW
Defrost Power:	
Current consumption:	1.2 Amps
Plug type:	CE-SCHUKO
Energy consumption (min,default):	1.9 - 2.66 kW/h

### Key Information:


Gross capacity:	400 lt
Net Volume:	268 lt
Door hinges:	
External dimensions, Width:	701 mm
External dimensions, Height:	1766 mm
External dimensions, Depth:	641 mm
Number and type of doors:	1 Glass
Internal Dimensions (depth):	435 mm
Internal Dimensions (height):	1450 mm
Internal Dimensions (width):	610 mm
Net weight:	77 kg
Shipping volume:	0.98 m <sup>3</sup>
Height adjustment:	0/0 mm
Number and type of grids (included):	4 - 600x400

### Refrigeration Data

Control type:	Digital
Compressor power:	
Refrigerant type:	R600a
GWP Index:	4
Refrigeration power:	253 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	100 g
Min/Max internal humidity:	70%/85%
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

### Product Information (EU Regulation 2015/1094)

Energy Class:	D
Yearly and daily energy consumption:	653kWh/year - 2kWh/24h
Climate class:	Light Duty (cl.3)
Energy Efficiency Index (EEI):	62,24
Type of model:	vertical chilled

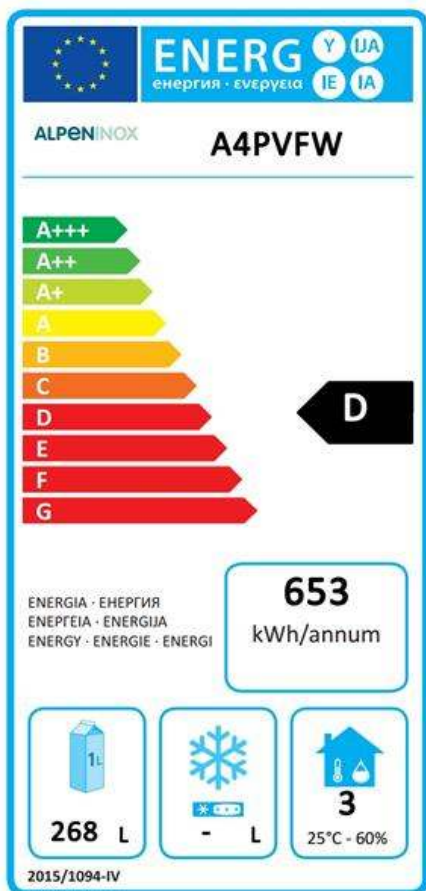

### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.