

## Roll-in Roll-in Compact Refrigerator 750 lt - 1 door

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



729493 (ARI075R1F)

1-door Roll-in Refrigerator  
750lt, 0+10°C, AISI 304, R290

### Short Form Specification

#### Item No.

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R290 gas in refrigeration circuit.

### Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- One full door.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Inner side protectors to protect the internal walls.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Digital control panel with temperature display.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Complies with main international certification bodies and is CE marked.
- Tropicalized unit.

APPROVAL: \_\_\_\_\_

### Construction

- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator and fan are placed outside the cell to provide the maximum storage capacity.
- Lockable door.
- Evaporator cover is easily removable for service.
- External panels are in AISI 304 stainless steel for higher level of hygiene.
- Electrical connection: 220-240V-single phase 50HZ or 220-240V-single phase 60HZ.


### Sustainability

- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.
- Finished in top quality materials to ensure durability.
- CFC and HCFC-free insulation.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


### Optional Accessories

- Insulated floor-ramp for 750lt Roll-in Refrigerator PNC 881278 ☐
- Ethernet connector for IR33 (CAREL) refrigerated cabinets and counters PNC 881299 ☐
- Trolley for 18x2/1GN roll-in 750L PNC 881521 ☐

### Front

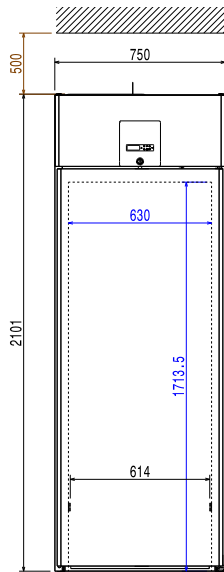


### Side

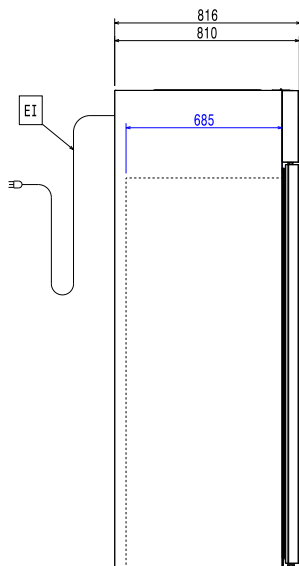

EI = Electrical inlet (power)

### Top

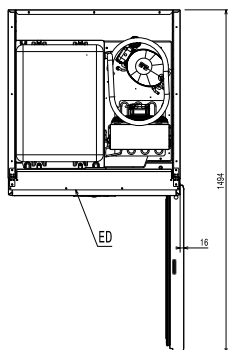

### Electric

Supply voltage:	220-240 V/1 ph/50 Hz
Predisposed for:	220-230 V 60 Hz

### Key Information:

Door hinges:	
External dimensions, Width:	750 mm
External dimensions, Depth:	816 mm
External dimensions, Height:	2101 mm
Number and type of doors:	1 Full
External side panels:	304 AISI
External top panels:	Galvanized Steel
External door material:	304 AISI

### Refrigeration Data

Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Compressor power:	1/3 hp

### Sustainability

Refrigerant type:	R290
Refrigeration power:	520 W
Refrigerant weight:	150 g