

400 Line 1 Door Freezer (-15/-24) - White (R290)


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

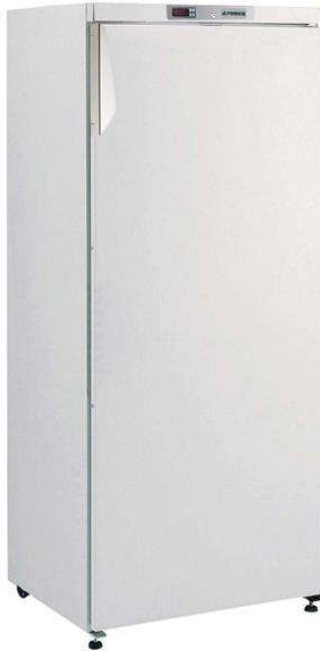

729578 (A4FSFW)

1-door freezer 400lt, -15-24°C,
prepainted white

Short Form Specification

Item No. _____

Exterior in white painted steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38°C. HCFC, CFC and HFC free insulation and R290 refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

Main Features

- CFC and HCFC free (highly ecological refrigerant type: R290).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

Sustainability


- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).

Optional Accessories


- PVC container with false bottom for 400L PNC 881072

APPROVAL: _____

Front

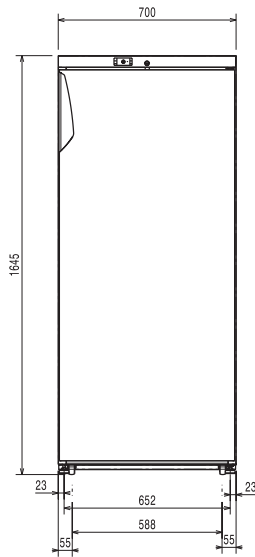


Side

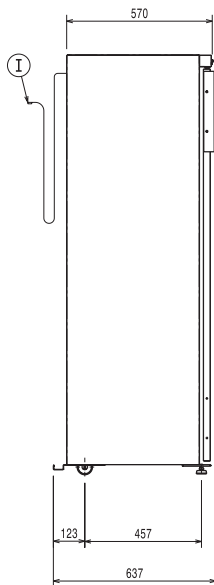

EI = Electrical inlet (power)

Top



Electric

Supply voltage:	220-240 V/1 ph/50 Hz
729578 (A4FSFW)	
Electrical power max.:	0.37 kW
Plug type:	CE-SCHUKO

Key Information:

External dimensions, Width:	700 mm
External dimensions, Depth:	620 mm
External dimensions, Height:	1645 mm
Number and type of doors:	1 Full
Internal Dimensions, Width:	610 mm
Internal Dimensions, Depth:	435 mm
Internal Dimensions, Height:	1450 mm
Net weight:	75 kg
Shipping volume:	0.96 m ³
Number and type of grids (included):	- 600x400

Refrigeration Data

Control type:	Digital
Compressor power:	3/4 hp
Refrigeration power at evaporation temperature:	-23.3 °C
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static

Sustainability

Current consumption:	3.5 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	644 W