

ALPENINOX

Crio Smart 2 Half Door Dual Digital Refrigerator, 670lt (-2/-22)

ITEM #

MODEL #

NAME #

SIS #

AIA #



729661 (ARX72HDDC)

2-half door, dual temperature
refrigerator/freezer
670lt, -2/+10°C/-22-15°C,
digital, AISI 304, R290

Short Form Specification

Item No.

Two half door refrigerator with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Dual operating temperature: -2/+10°C -15/-22°C. CFC and HCFC free. R290 gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Main Features

- Automatic defrost.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m²K).
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Right hinged two 1/2 doors.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- This appliance is intended for use in ambient temperatures up to 40°C.
- Dual temperature type: -2 +10 °C/-15 -22 °C.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Easy serviceability thanks to the intuitive control panel with access via app.
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Right hinged full door.
- Tropicalized unit.

Construction

- Interior base with rounded corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Doors are self-closing and can be fully opened up to 180°.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Constructed from the highest quality AISI 304 Stainless steel.
- Mounted on adjustable Stainless steel feet, with castors as an option.

APPROVAL:

Part of



Electrolux
Professional
Group

ALPENINOX
www.alpeninox.com

Sustainability

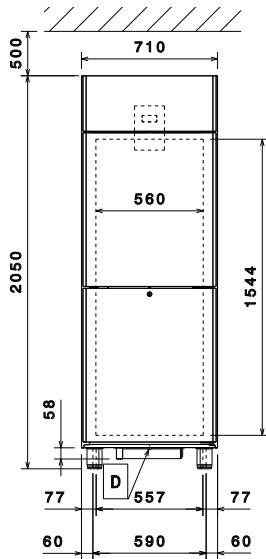
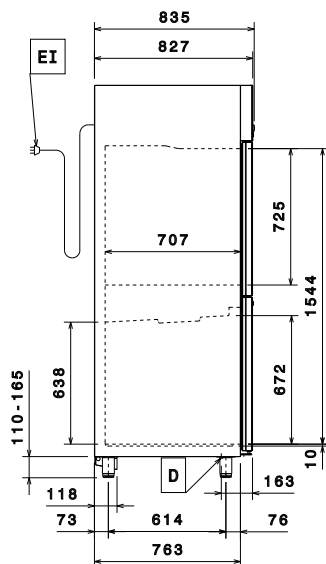
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- CFC and HCFC-free insulation.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- R290 refrigerant to reduce green house and ozone depletion effects.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.

Included Accessories


- 3 of 2/1GN gray rilsan grid with 2 runners PNC 881020

Optional Accessories

- 2 stainless steel runners for refrigerated cabinets - (Marine) PNC 880242 ☐
- Spacer for 670L and 1430L refrigerated cabinets PNC 880248 ☐
- Pedal opening for cabinets PNC 880324 ☐
- Ethernet connectivity kit IJF for Refrigeration PNC 880685 ☐
- Plastic container with false bottom, 1/1GN PNC 880705 ☐
- 4 swivelling wheels (2 with brake), diam 125 mm, for refrigerators, NOT for remote models PNC 881002 ☐
- 2/1GN gray rilsan grid PNC 881004 ☐
- AISI 304 stainless steel grid, 2/1GN PNC 881016 ☐
- AISI 304 stainless steel grid with 2 runners, 2/1GN PNC 881018 ☐
- 2/1GN gray rilsan grid with 2 runners PNC 881020 ☐
- Set of 2 stainless steel runners for 670/1430L refrigerators and freezers PNC 881021 ☐
- Kit of 4 small swivelling wheels (2 with brake), diam 50mm, NOT for remote models PNC 881035 ☐
- 2/1GN perforated shelf PNC 881042 ☐
- 1/1GN rilsan steel wire basket h150mm PNC 881043 ☐
- IOT module for refrigerated cabinets and counters PNC 881298 ☐
- POE switch PNC 922432 ☐

Front**Side**

EI = Electrical inlet (power)

Top**Electric**

Supply voltage:	220-240 V/1 ph/50 Hz
Electrical power max:	0.5 kW
Defrost Power:	0.25 kW
Plug type:	CE-SCHUKO

Capacity:

Number and type of grids (included):	3 - GN 2/1
--------------------------------------	------------

Key Information:

Door hinges:	
External dimensions, Width:	710 mm
External dimensions, Depth:	835 mm
External dimensions, Height:	2010 mm
Number and type of doors:	2x1/2 Full
Internal Dimensions, Width:	560 mm
Internal Dimensions, Depth:	707 mm
Net weight:	112 kg
Shipping volume:	1.41 m³
Height adjustment:	0/0 mm

Refrigeration Data

Control type:	Digital
Refrigeration power at evaporation temperature:	-10 °C
Min/Max internal humidity:	
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Compressor power:	1 hp
Operating mode:	Ventilated

Sustainability

Current consumption:	3.6 Amps
Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	581 W
Refrigerant weight:	130 g
Energy consumption (min,default):	0 - 0 kW/h