

## Crio Smart HP 1 Door Digital Refrigerator, 670lt (-2/+10) - R290 - Class B

ITEM #

MODEL #

NAME #

SIS #

AIA #



729672 (ARX71FRH)

1-door refrigerator  
670lt, -2/+10°C, digital, AISI  
304, R290, Class B

### Short Form Specification

#### Item No.

Full door refrigerator entirely constructed in 304 AISI stainless steel with bottom panel in anti-corrosive material. Large digital display featuring cabinet temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads). HACCP-compliant control with alarms and history. IQ Defrost to defrost only when required with automatic evaporation of defrost water. Three probes to constantly monitor the working conditions of the appliance. Airflow System: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions. Fitted with 90 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; Internal LED light. Operating temperature: -2/+10 °C. CFC and HCFC free. R290 gas in refrigeration circuit. Certified as Class B (in accordance with EU Regulation 2015/1094). Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

### Main Features

- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Right hinged full door.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Provided with stainless steel A304 grids.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Airflow: back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions.
- IQ Defrost: fully automatic defrost starts only when ice is actually building-up in the evaporator.
- Cabinet fitted with up to 90 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m\*K).
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Easy serviceability thanks to the intuitive control panel with access via app.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Rilsan coated grids for improved protection.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.

APPROVAL:

Part of



Electrolux  
Professional  
Group

**ALPENINOX**  
www.alpeninox.com

## Construction

- Interior base with rounded corners, pressed from a single sheet.
- Constructed from the highest quality AISI 304 Stainless steel.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- The rounded internal corners, the easily removable runners, grids and air conveyors allow for ease of cleaning and high hygiene standards.
- Easy access to the main components for maintenance.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Doors are self-closing and can be fully opened up to 180°.
- Lockable door.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.


## Included Accessories

- 3 of 2/1GN gray rilsan grid with 2 runners PNC 881020


## Optional Accessories

- |   |            |                          |
|---|------------|--------------------------|
| • 2 stainless steel runners for refrigerated cabinets - (Marine)                            | PNC 880242 | <input type="checkbox"/> |
| • Spacer for 670L and 1430L refrigerated cabinets   | PNC 880248 | <input type="checkbox"/> |
| • Pedal opening for cabinets  | PNC 880324 | <input type="checkbox"/> |
| • Kit remote alarm  | PNC 880570 | <input type="checkbox"/> |
| • Ethernet connectivity kit IJF for Refrigeration   | PNC 880685 | <input type="checkbox"/> |
| • Plastic container with false bottom, 1/1GN  | PNC 880705 | <input type="checkbox"/> |
| • 4 swivelling wheels (2 with brake), diam 125 mm, for refrigerators, NOT for remote models | PNC 881002 | <input type="checkbox"/> |
| • Kit to fit 10 pastry trays (400x600mm)  | PNC 881003 | <input type="checkbox"/> |
| • 2/1GN gray rilsan grid  | PNC 881004 | <input type="checkbox"/> |
| • AISI 304 stainless steel grid, 2/1GN  | PNC 881016 | <input type="checkbox"/> |
| • AISI 304 stainless steel grid with 2 runners, 2/1GN                                       | PNC 881018 | <input type="checkbox"/> |
| • Meat rail for 670/1430L refrigerators with 4 hooks  | PNC 881019 | <input type="checkbox"/> |
| • 2/1GN gray rilsan grid with 2 runners   | PNC 881020 | <input type="checkbox"/> |
| • Set of 2 stainless steel runners for 670/1430L refrigerators and freezers                 | PNC 881021 | <input type="checkbox"/> |
| • 2/1GN perforated shelf  | PNC 881042 | <input type="checkbox"/> |
| • 1/1GN rilsan steel wire basket h150mm   | PNC 881043 | <input type="checkbox"/> |

### Front

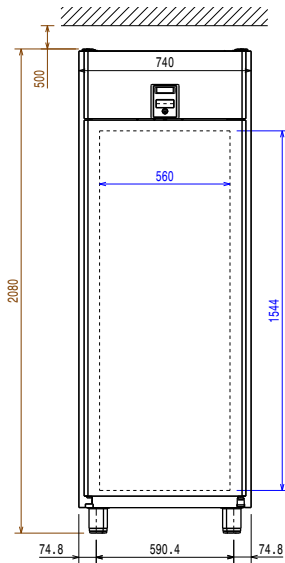


### Side

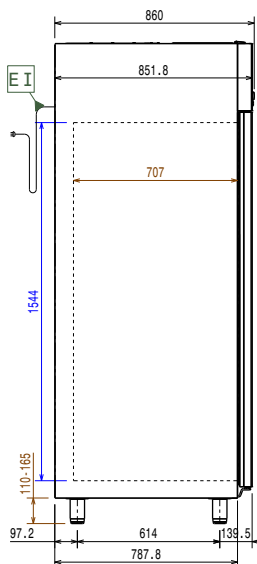

EI = Electrical inlet (power)

### Top

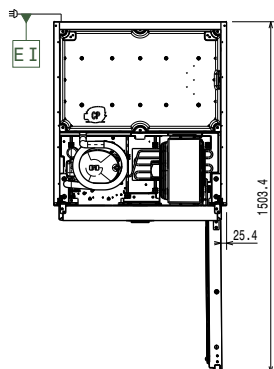

### Electric

Supply voltage:

729672 (ARX71FRH)

220-240 V/1 ph/50 Hz

Electrical power max.:

0.18 kW

### Key Information:

Gross capacity:	670 lt
Net Volume:	503 lt
N° of doors:	1
Door hinges:	Right Side
External dimensions, Width:	740 mm
External dimensions, Depth:	860 mm
External dimensions, Depth with Doors Open:	1480 mm
External dimensions, Height:	2080 mm
Number and type of grids (included):	3 - GN 2/1
Type of external material:	304 AISI
Type of internal material:	304 AISI
Internal panels material:	304 AISI
Number of positions & pitch:	44; 30 mm

### Refrigeration Data

Control type:	Digital
Compressor power:	1/5 hp
Refrigeration power at evaporation temperature:	-10 °C
Min/Max internal humidity:	70/90
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Cooling unit:	Built-In
Defrost type:	Electric

### Sustainability

Energy Class (EU Reg. 2015/1094):

B

Yearly and daily energy consumption (EU Reg. 2015/1094):

475kWh/year - 1kWh/24h

Climate class (EU Reg. 2015/1094):

Heavy Duty (5)

Energy Efficiency Index-EEI (EU Reg. 2015/1094):

33.09

GWP Index:

3

Refrigeration power:

315 W

Refrigerant weight:

110 g

### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

