

## Pizza counters Bench Type Refrigerated Showcase 1780mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



291490 (ZVR1780)

Bench type refrigerated showcase 1780mm

### Short Form Specification

Item No. \_\_\_\_\_

Constructed in 304 AISI stainless steel. Designed for use with 1/4GN and 1/2GN containers (not included). Built-in refrigeration unit. Refrigerant R134a. Thermostatic temperature control. Temperature range: 0+10°C. CFC and HCFC free.

### Main Features

- Complies with main international certification bodies and is CE marked.
- Supplied for use without the protective glass panels (side, back and top) which must be ordered separately as accessories.
- Designed for use with the specific sets of stainless steel 1/4 and 1/2 GN containers (without lids) which are available as accessories.
- Provided with its own integral, highly efficient refrigeration unit with low noise emission and reduced energy consumption. Temperature thermostatically controlled.


### Construction

- Constructed in 304 AISI stainless steel complete with sides.
- CFC and HCFC free.

### Optional Accessories

- Glass panels for refrigerated showcase, 1780mm PNC 291496
- GN containers for refrigerated 1780mm show case - n. 4x1/4 + n. 2x1/2 h150mm PNC 921850

APPROVAL: \_\_\_\_\_

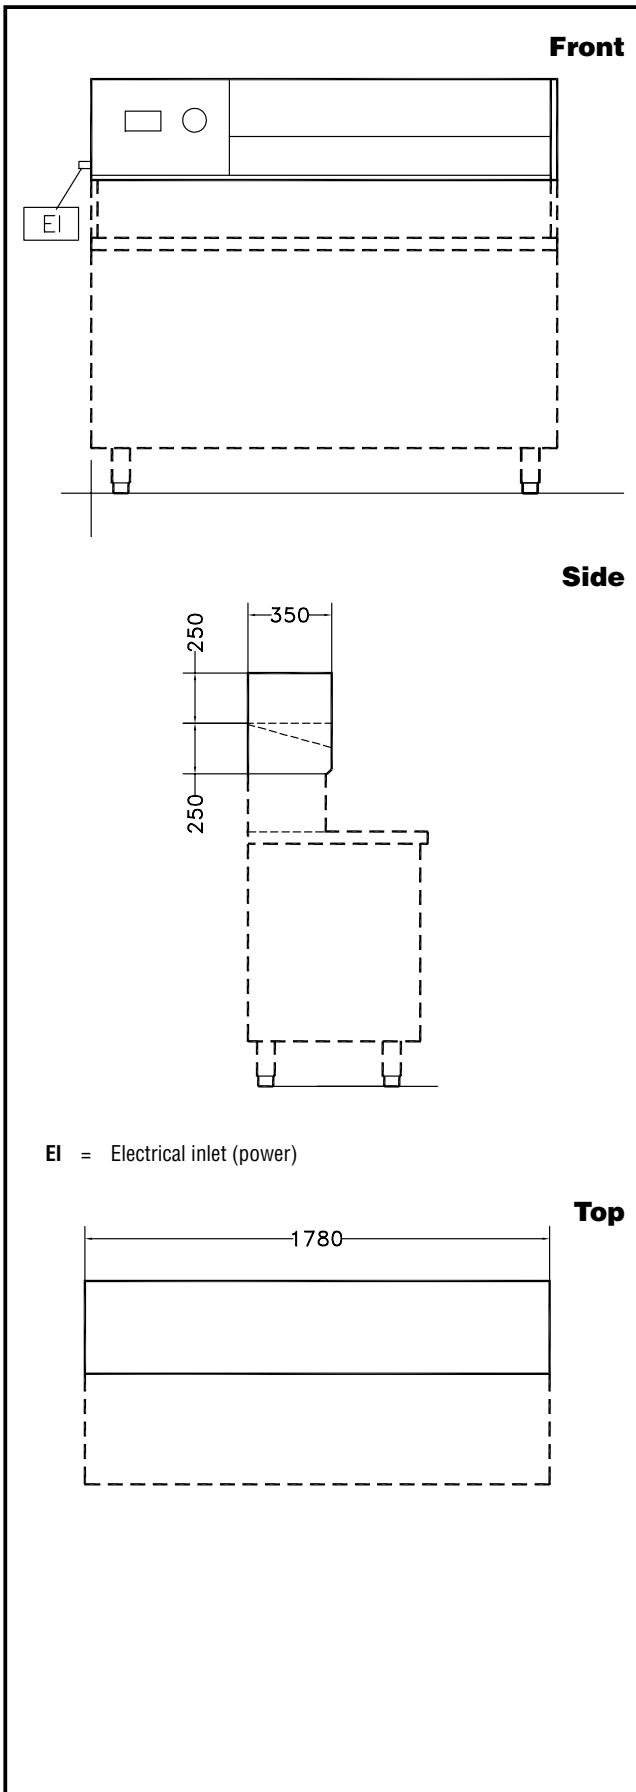

### Electric

Supply voltage:

291490 (ZVR1780)

230 V/1 ph/50 Hz

Electrical power max.:

0.222 kW

### Key Information:

External dimensions, Width: 1780 mm

External dimensions, Height: 250 mm

External dimensions, Depth: 350 mm

Net weight: 42 kg

### Refrigeration Data

Control type: Digital

Refrigerant type: R134a

Refrigeration power: 278 W

Operating temperature min.: 0 °C

Operating temperature max.: 10 °C