

ALPENINOX

CRIO Chill Smart Blast Chiller

Crosswise 10 1/1 - 28 kg - Remote

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



728822 (EABP0201R)

Blast chiller 28kg, compatible with 10x1/1GN crosswise oven, remote

Short Form Specification

Item No.

For 10 GN1/1 or 600x400 mm trays. Load capacity: chilling 28 kg; (UK guidelines). Main components in 304 AISI stainless steel. Internal rounded corners and drain. Right hinged, reversible full door. Remote refrigeration unit. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real residual time estimation (A.R.T.E.). Turbo cooling function. Specific cycles for ice cream. Evaporator with antirust protection. Digital temperature and time display. HACCP and Service alarms with data logging. Operating air temperature: +90 -12°C. For ambient temperatures up to 32°C. Cyclopentane insulation (HCFC, CFC and HFC free).

Main Features

- Blast Chilling cycle: 28 kg from 90°C up to 3°C in less than 90 minutes.
- Hard Chilling (air temperature -12°C).
- Holding at 3°C for chilling, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- Two customizable cycles (P1 & P2) for each operating mode, allowing to set the time and air temperature. These programs can be converted into ice-cream specialized cycles (shape maintenance and holding).
- All information related to the different operating models are recorded: date, time, cycle, core temperature, holding temperature, HACCP accordance.
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE) for an easier planning of the activities.
- Single sensor core probe as standard.
- Standard equipped with one core temperature probe, can be ordered either with up to three core temperature probes or with one 3-sensor probe.
- Soft Chilling (air temperature -2°C).
- Performance guaranteed at ambient temperatures of +40°C.

Construction

- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Magnetic, easy-to-remove heated gaskets.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic inner cell with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.
- Requires remote refrigeration connection.
- Refrigerant type: R134a.

APPROVAL: _____


Included Accessories

- 1 of 1 single sensor probe for blast chiller and blast chillers&freezer PNC 880213


Optional Accessories

- Kit of HACCP advanced connection for blast chiller and blast chillers/freezers PNC 880183
- 3 sensor probes for blast chiller and blast chillers/freezers PNC 880212
- Rilsan grid 600x400mm PNC 880864
- Plastic coated grid for refrigerated counters PNC 881061
- Roll-in guide runners for 28kg blast chillers and blast chiller/freezers 1/1GN PNC 881518
- Pair of 1/1GN grids in 304 AISI PNC 921101
- 80mm pitch side hangers for 10x1/1GN electric oven PNC 922115
- 80mm pitch side hangers for 10x1/1GN gas oven PNC 922116
- 60mm pitch side hangers for 10x1/1GN electric oven PNC 922121
- 60mm pitch side hangers for 10x1/1GN gas oven PNC 922122
- Trolley for 10x2/1GN roll-in rack PNC 922128
- Trolley for 10x1/1GN roll-in rack PNC 922130
- Kit to convert to 10x1/1GN roll-in rack PNC 922201

Front

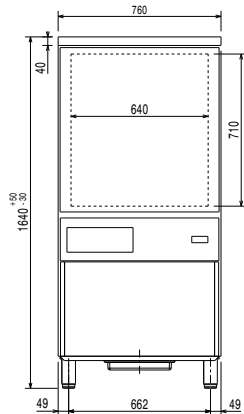


Side

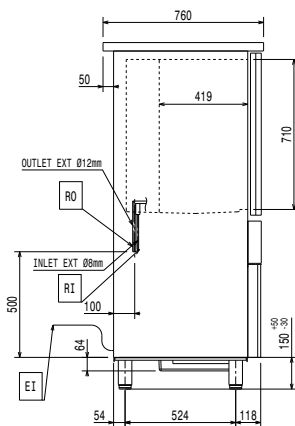

- D** = Drain
- EI** = Electrical inlet (power)
- RO** = Refrigerant Outlet

Top

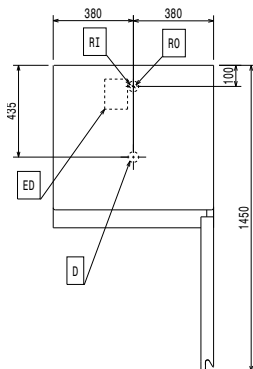

Electric

Supply voltage:
728822 (EABP0201R) 220-240 V/1 ph/50/60 Hz

Electrical power max.: 0.12 kW

Circuit breaker required

Installation:

Clearance: 5 cm on sides and back.

Please see and follow detailed installation instructions provided with the unit

Capacity:

Max load capacity: 28 kg

GN: 10 - 1/1 containers

Key Information:

External dimensions, Width: 760 mm

External dimensions, Height: 1640 mm

External dimensions, Depth: 760 mm

Net weight: 114 kg

Shipping weight: 134 kg

Shipping volume: 1.33 m³

Chilling-Freezing Productivity per cycle (NF Regulations): 21.6 kg - 0 kg

Chilling-Freezing Productivity per cycle (UK Guidelines): 28 kg - 0 kg

Refrigeration Data

Control type: Electronic

Refrigerant type: R134a

Suggested refrigeration power: 1700 W

Condition at evaporation temperature: -10 °C

Condition at condensation temperature: 45 °C

Condition at ambient temperature: 32 °C

Connection pipes (remote) - outlet: 12 mm

Connection pipes (remote) - inlet: 8 mm

Note: refrigeration power calculated at a distance of 20 linear mt.