

# ALPENINOX

## CRIO Chill Power Blast Chiller-Freezer 6 1/1 - 30kg with USB-R452a

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_

ALPENINOX

CRIO Chill Power  
Blast Chiller-Freezer 6 1/1 - 30kg with USB-R452a



728948 (EABCS31C)

Blast chiller/freezer for 6xGN  
1/1 or 600x400 mm (18 levels  
pitch 20mm), 30/25 kg,  
lengthwise with USB (R452a)

### Short Form Specification

#### Item No.

For 6 GN1/1 or 600x400 mm trays. Up to 9 ice cream basins 5kg (mm 165x360x125h). 18 levels, pitch 20mm. Load capacity: chilling 30 kg; freezing 25 kg (UK guidelines). Compatible with Electrolux, Alpeninox and Rational SCC Lengthwise ovens. Main components in 304 AISI stainless steel. Internal rounded corners and drain. Built-in refrigeration unit. Cruise cycle for fully automatic blast chilling with food probe. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real residual time estimation (A.R.T.E.). Turbo cooling function. Specific cycles for ice cream. Evaporator with antirust protection. Digital temperature and time display. HACCP and Service alarms with data logging. Operating air temperature: +90 -4°C. Cyclopentane insulation (HCFC, CFC and HFC free). R452a refrigerant gas (HCFC and CFC free).

### Main Features

- Blast Freezing cycle: 25 kg from 90°C up to -18°C in less than four hours.
- Blast Chilling cycle: 30 kg from +90°C up to + 3°C in less than 90 minutes.
- Multi-purpose internal structure is suitable for 6 grids GN 1/1 (18 positions available with 20 mm pitch) 6 grids or trays 600 x 400 mm (18 positions available with 20 mm pitch) or 9 ice-cream basins of 5 kg each (h 125 x 165 x 360mm).
- Soft Chilling (air temperature -2°C).
- Hard Chilling (air temperature -20°C).
- Shock freezing (low air temperature adjustable up to -41°C).
- Holding at +3 °C for chilling or -22 °C for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Cruise cycle: the chiller automatically sets the parameters for the quickest and best chilling (it works by probe).
- Two specialized cycles:  
P1 brings down ice-cream temperature to -14°C (measured at the core when probe is inserted). Once set temperature is reached, the temporary maintenance phase automatically begins, holding the -14°C temperature.  
P2 sets temperature to -36°C/-40°C for an indefinite amount of time, maintaining the ventilation active. Temperature is adjustable up to -40°C without interrupting the cycle, allowing ice-cream to be kept longer in the freezer.
- Control unit provides several operating settings (programmable parameters): time/core temperature according to NF and UK regulations, time/air temperature/probe personalized according to national regulations, sterilizing cycle: UV lamps built-in (on request), 3 single sensor or 3-sensor temperature probes (as accessory), ideal for meats, automatic defrosting and manual defrosting.
- 3-sensor core probe as standard and automatic detection of the core probe insertion.
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE) for an easier planning of the activities.
- Control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- Audible alarm starts when the cycle ends or terminates abnormally.
- All information related to the different operating models are recorded: date, time, cycle, core temperature, holding temperature, HACCP accordance.
- Performance guaranteed at ambient temperatures of +43°C.
- USB connection: to download HACCP data from the blast chiller (time, cavity temperature, alarms, and probe temperature).

APPROVAL: \_\_\_\_\_

### **Construction**

- Internal and external finishing in 304 AISI stainless steel and backpanel in galvanized steel.
- Main components in 304 AISI stainless steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Evaporator with antirust protection.
- Motors and fan waterproof protected IP23.
- PC connection on request, gate RS 485.
- Stand alone printer as accessory.
- Inner cell with fully rounded corners.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Removable magnetic gasket door with hygienic design.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Automatic heated door frame.
- Thermostatic expansion valve to optimize the cooling unit efficiency.
- Solenoid valve included.
- No water connections required.
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.
- Environmentally friendly: R452a as refrigerant gas.


### **Included Accessories**

- 1 of 3 sensor probes for blast chiller and blast chillers/freezers PNC 880212
- 1 of Set of 5 stainless steel runners for blast chiller LW 30 and 50kg PNC 880312


### **Optional Accessories**

- 4 wheels for 30kg blast chillers, 30/25kg blast chiller/freezers PNC 880111
- Kit of HACCP advanced connection for blast chiller and blast chillers/freezers PNC 880183
- 3 sensor probes for blast chiller and blast chillers/freezers PNC 880212
- 1 single sensor probe for blast chiller and blast chillers&freezer PNC 880213
- 2 single sensor probes for blast chiller-freezer PNC 880214
- 3 single sensor probes for blast chiller-freezer PNC 880215
- Pastry grid (400x600mm) for 70kg blast chillers/blast chiller freezers PNC 880294
- Set of 5 stainless steel runners for blast chiller LW 30 and 50kg PNC 880312
- Tower execution support 6GN oven on 30kg blast chiller and freezer PNC 881049
- Plastic coated grid for refrigerated counters PNC 881061
- Kit buzzer for blast chiller/freezer lengthwise with USB PNC 881143
- Pair of 1/1GN grids in 304 AISI PNC 921101
- Kit HACCP EKIS PNC 922166

**Front**

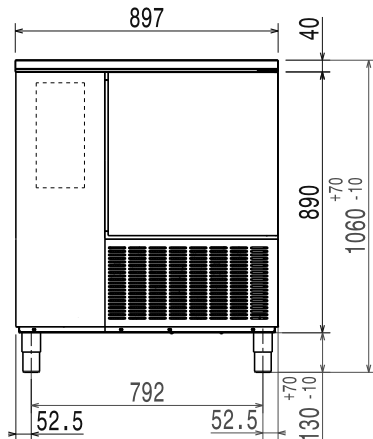


**Side**

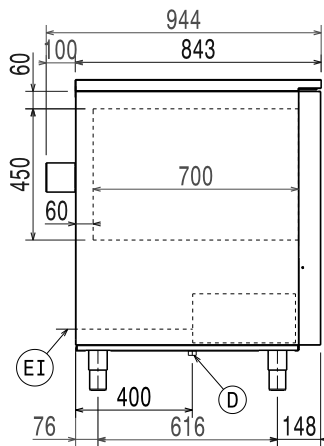

- D** = Drain
- EI** = Electrical inlet (power)
- RO** = Refrigerant Outlet

**Top**

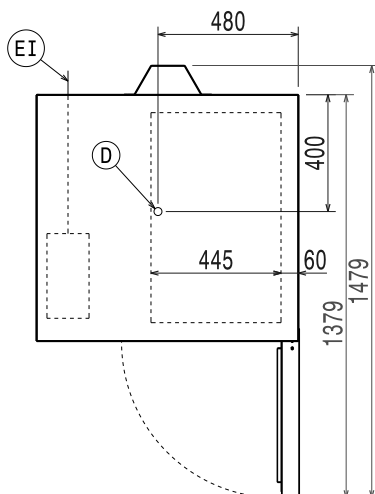

### Electric

<b>Supply voltage:</b>	
728948 (EABCS31C)	380-415 V/3N ph/50 Hz
<b>Electrical power max.:</b>	2.39 kW
<b>Circuit breaker required</b>	

### Installation:

**Clearance:** 5 cm on sides and back.  
Please see and follow detailed installation instructions provided with the unit

### Capacity:

<b>GN:</b>	6 - 1/1 containers
<b>Max load capacity:</b>	30 kg

### Key Information:

<b>External dimensions, Width:</b>	897 mm
<b>External dimensions, Height:</b>	1060 mm
<b>External dimensions, Depth:</b>	944 mm
<b>Net weight:</b>	150 kg
<b>Shipping weight:</b>	162 kg
<b>Shipping volume:</b>	1.32 m <sup>3</sup>

### Refrigeration Data

<b>Built-in Compressor and Refrigeration Unit</b>	
<b>Control type:</b>	Electronic
<b>Compressor power:</b>	1,8 hp
<b>Refrigerant type:</b>	R452A
<b>Refrigeration power:</b>	1600 W
<b>Refrigeration power at evaporation temperature:</b>	-30 °C
<b>Refrigerant weight:</b>	1800 g

### Product Information (Commission Regulation EU 2015/1095)

<b>Energy consumption, cycle (chilling):</b>	0.09 kWh/kg
<b>Chilling Cycle Time (+65°C to +10°C):</b>	76 min
<b>Full load capacity (chilling):</b>	30 kg
<b>Energy consumption, cycle (freezing):</b>	0.271 kWh/kg
<b>Freezing Cycle Time (+65°C to -18°C):</b>	242 min
<b>Full load capacity (freezing):</b>	25 kg