

CRIO Line CP 3 Door Freezer Counter, 415lt (-20/-15) - Remote

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



712397 (AA3FRAAA)

3-door freezer counter, -22-15°C, AISI 304, remote

Short Form Specification

Item No.

AISI 304 stainless steel panels, AISI 304 bottom panel, AISI 304 back panel. Worktop thickness 50mm. N. 3 full doors. For connection to a remote refrigeration unit (not included). Automatic defrost. Operating temperature: -15-22°C. R452A gas in refrigeration circuit. Supplied with 1 grid for each door compartment

Main Features

- Adjustable temperature range from -15 °C to -20 °C to suit meat, fish and dairy storage requirements.
- Freezer compartment designed to accept GN1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel with temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Adjustable temperature range from -15°C to -22°C.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Equipped with Airflow system: forced air circulation system for rapid cooling and even temperature distribution within the cell.
- Tropicalized unit (43°C ambient temperature).
- 0mm clearance installation space: tower configuration cooling unit guarantee performance with frontal ventilation only; this unique solution allows installation against the wall or side by side with other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Combination of doors and drawers to suit any configuration needed, with the possibility to change the configuration on site. Right cooling unit available on request.
- Frontal and easy access to all components in the cooling unit.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Anti-tilt runners accept GN 1/1 containers.
- Self closing stainless steel doors (< 90°).
- Certified safety CE requirements.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Hot gas automatic evaporation of defrost water.
- Mounted on stainless steel feet to give 150 mm (-5/+50 mm) clearance for ease of cleaning the floor.
- External bottom panel in stainless steel.
- External back panel in galvanized steel.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with remote access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Construction

- Built-in compressor to suit operating conditions.
- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

APPROVAL: _____

- Pre-arranged for drain-pipe.
- Extractable cooling unit to facilitate maintenance.
- Fault code display.
- Interior base with rounded corners, pressed from a single sheet.
- Internal and external doors, front and side panels and removable worktop in AISI 304 Stainless steel.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Built-in refrigeration unit.
- Anti-drip profile on stainless steel worktop edge.
- 3 compartments with 3 doors.
- If needed, working top can be removed for easier handling during installation (in case of narrow doors).
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- IP21 protection index.

- Lock for refrigerator/freezer counters with 3 compartments - h650mm

PNC 881246



Sustainability

- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- CFC and HCFC free (refrigerant type: R404a)
- IQ Defrost - fully automatic defrost starts only when ice is actually building-up in the evaporator and adapts the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K) and lowest environmental impact (GWP=3).

Included Accessories

- 3 of Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters

PNC 881109

Optional Accessories

- Automatic defrost with waste evaporation
- Worktop for refrigerated Crio Line HP and freezer HP, CP and SB counters, remote - 3 compartments
- Worktop and upstand for refrigerated Crio Line HP and freezer Crio Line HP, CP and SB counters, remote - 3 compartments
- 1/1GN gray rilsan grid for refrigerated counters
- 2 side runners for 1/1GN refrigerated counters
- Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters
- 1/1GN plastic container, h65mm
- 1/1GN plastic container, h100mm
- 1/1GN plastic container, h150mm
- Remote unit for 670L cabinets and freezer counters - 2 and 3 compartments (R404a)
- 2-drawer kit refrigerated counters

PNC 880028 ☐

PNC 881099 ☐

PNC 881105 ☐

PNC 881107 ☐

PNC 881108 ☐

PNC 881109 ☐

PNC 881110 ☐

PNC 881111 ☐

PNC 881112 ☐

PNC 881123 ☐


PNC 881179 ☐



CRIO Line CP
3 Door Freezer Counter, 415lt (-20/-15) - Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.12.06

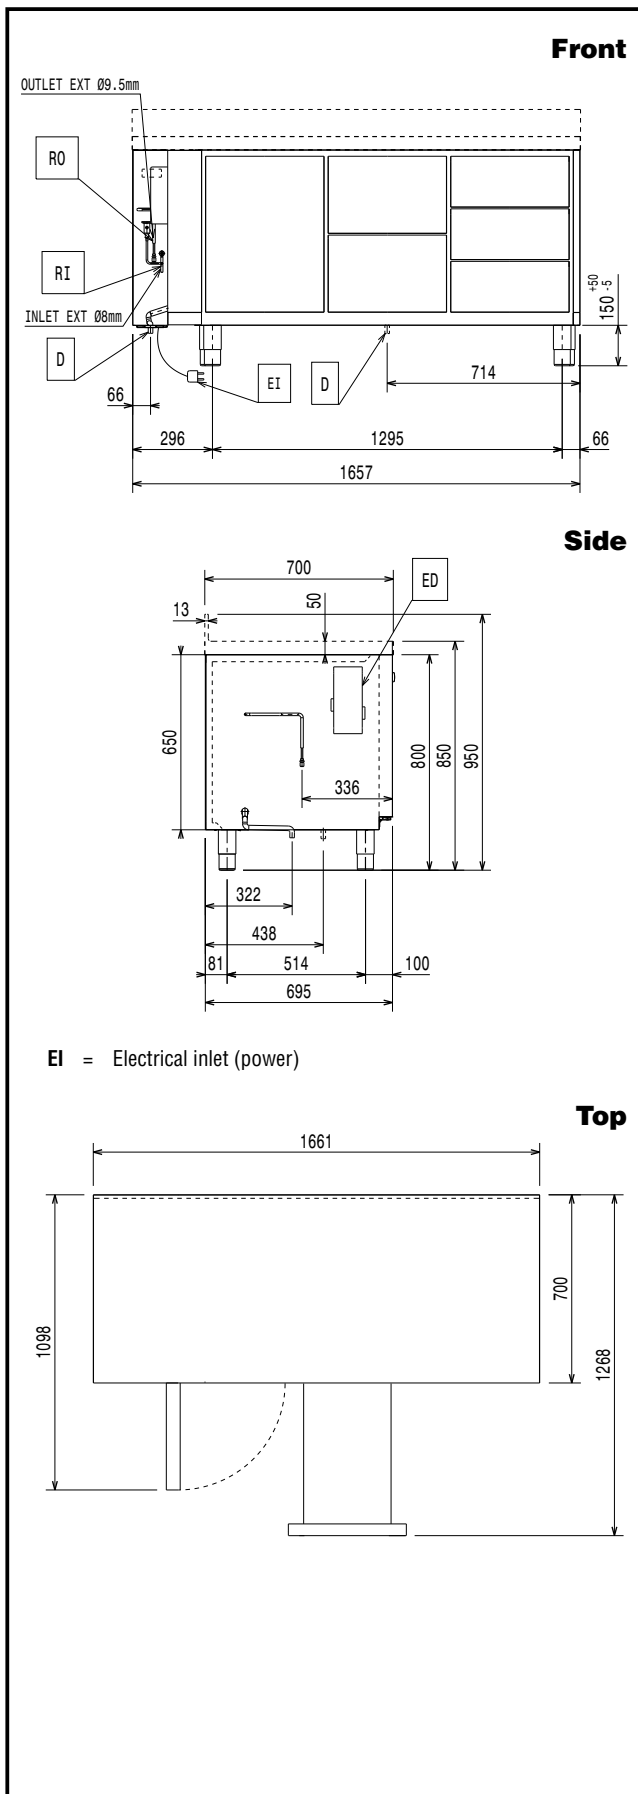

Electric

Supply voltage:

712397 (AA3FRAAA)

220-240 V/1 ph/50/60 Hz

Electrical power max.:

0.1 kW

Key Information:

Gross capacity:

440 lt

Net Volume:

271.2 lt

N° of doors:

3

Door hinges:

1 Left+2 Right

External dimensions, Width:

1661 mm

External dimensions, Depth:

700 mm

External dimensions, Depth with Doors Open:

1110 mm

External dimensions, Height:

850 mm

Depth with doors open:

1110 mm

Refrigeration Data

Control type:

Digital

Compressor power:

Refrigeration power at evaporation temperature:

-30 °C

Operating temperature min.:

-15 °C

Operating temperature max.:

-22 °C

Refrigeration type:

R404A;R452A

Operating mode:

Ventilated

Defrost type:

N° defrost in 24 hrs:

Suggested refrigeration power:

654 W

Condition at evaporation temperature:

-30 °C

Condition at condensation temperature:

55 °C

Condition at ambient temperature:

32 °C

Connection pipes (remote) - outlet:

9.5 mm

Connection pipes (remote) - inlet:

8 mm

Sustainability

Refrigeration power:

0 W

Refrigerant weight:

0 g