

## CRIO Line CP 2 Door Freezer Counter, 265lt (-20/-15)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



712676 (AJ2FBAA)

2-door freezer counter, -2+10°  
C, (R290), AISI 304

### Short Form Specification

**Item No.** \_\_\_\_\_

AISI 304 stainless steel panels, AISI 304 bottom panel, AISI 304 back panel.  
Worktop thickness 50mm. N. 2 full doors. Built-in refrigeration unit.  
Automatic defrost. Operating temperature: -15-22°C. R290 gas in  
refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Adjustable temperature range from -15 °C to -20 °C to suit meat, fish and dairy storage requirements.
- Freezer compartment designed to accept GN1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel with temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- IQ Defrost - fully automatic defrost starts only when ice is actually building-up in the evaporator and adapts the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Adjustable temperature range from -15°C to -22°C.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Equipped with Airflow system: forced air circulation system for rapid cooling and even temperature distribution within the cell.
- Tropicalized unit (43°C ambient temperature).
- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K) and lowest environmental impact (GWP=3).
- 0mm clearance installation space: tower configuration cooling unit guarantee performance with frontal ventilation only; this unique solution allows installation against the wall or side by side with other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Combination of doors and drawers to suit any configuration needed, with the possibility to change the configuration on site. Right cooling unit available on request.
- Frontal and easy access to all components in the cooling unit.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Anti-tilt runners accept GN 1/1 containers.
- Self closing stainless steel doors (< 90°).
- Certified safety CE requirements.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Hot gas automatic evaporation of defrost water.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

### Construction

- Built-in compressor to suit operating conditions.
- Full stainless steel construction. Internal structure and worktop in AISI 304 Stainless steel.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Access to all components from the front.

APPROVAL: \_\_\_\_\_

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Pre-arranged for drain-pipe.
- Extractable cooling unit to facilitate maintenance.
- Fault code display.
- Interior base with rounded corners, pressed from a single sheet.
- Internal and external doors, front and side panels and removable worktop in AISI 304 Stainless steel.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Built-in refrigeration unit.
- Anti-drip profile on stainless steel worktop edge.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- 2 compartments with 2 doors.
- If needed, working top can be removed for easier handling during installation (in case of narrow doors).
- Mounted on stainless steel feet to give 150 mm (-5/+50 mm) clearance for ease of cleaning the floor.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- IP21 protection index.


### Included Accessories

- 2 of Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters PNC 881109

### Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Worktop for refrigerated Crio Line HP and freezer Crio Line HP, CP and SB counters - 2 compartments PNC 881084
- Worktop and upstand for refrigerated Crio Line HP and freezer Crio Line HP, CP and SB counters - 2 compartments PNC 881087
- 1/1GN gray rilsan grid for refrigerated counters PNC 881107
- 2 side runners for 1/1GN refrigerated counters PNC 881108
- Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters PNC 881109
- 1/1GN plastic container, h65mm PNC 881110
- 1/1GN plastic container, h100mm PNC 881111
- 1/1GN plastic container, h150mm PNC 881112
- 2-drawer kit refrigerated counters PNC 881179
- Lock for refrigerator/freezer counters with 2 compartments - h650mm PNC 881245

**Front**


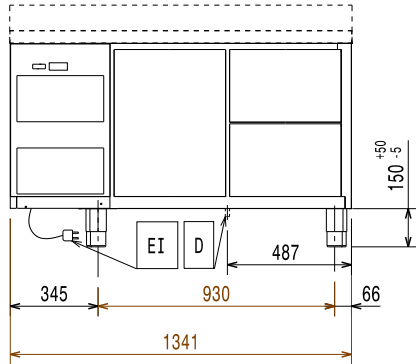


**Side**




EI = Electrical inlet (power)



**Top**



**Front**





**Side**



**EI** = Electrical inlet (power)

**Top**



**Electric**

|                        |                      |
|------------------------|----------------------|
| Supply voltage:        |                      |
| 712676 (AJ2FBAA)       | 220-240 V/1 ph/50 Hz |
| Electrical power max.: | 0.49 kW              |

**Key Information:**

|   |                |
|---|----------------|
| Gross capacity:                                   |                |
| Net Volume:                                       | 160.4 lt       |
| N° of doors:                                      |                |
| Door hinges:                                      | 1 Left+1 Right |
| External dimensions, Width:                       | 1345 mm        |
| External dimensions, Depth:                       | 700 mm         |
| External dimensions, Depth with Doors Open:       | 1110 mm        |
| External dimensions, Height:                      | 850 mm         |
| Depth with doors open:                            | 1110 mm        |
| <b>Built-in Compressor and Refrigeration Unit</b> |                |

**Refrigeration Data**

|   |            |
|---|------------|
| Control type:                                   | Digital    |
| Compressor power:                               | 3/4 hp     |
| Refrigerant type:                               | R290       |
| GWP Index:                                      | 3          |
| Refrigeration power:                            | 569 W      |
| Refrigeration power at evaporation temperature: | -30 °C     |
| Refrigerant weight:                             | 140 g      |
| Operating temperature min.:                     | -15 °C     |
| Operating temperature max.:                     | -22 °C     |
| Operating mode:                                 | Ventilated |
| Defrost type:                                   |            |

**Product Information (EU Regulation 2015/1094)**

|                                      |                         |
|--------------------------------------|-------------------------|
| Energy Class:                        | C                       |
| Yearly and daily energy consumption: | 1600kWh/year - 4kWh/24h |
| Climate class:                       | Heavy Duty (5)          |
| Energy Efficiency Index (EEI):       | 48,24                   |

### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

