

## 160 Line 1 Door Undercounter Refrigerator (+2/+10) R600a

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



729456 (ARUCR16X16)

1-door refrigerated undercounter 160lt, +2/+10°C, stainless steel, R600a

729458 (AUCR16W1)

1-door refrigerated undercounter 160lt, +2/+10°C, prepainted white, R600a

### Short Form Specification

#### Item No.

430 AISI stainless steel reversible door with lock. Top in grey ABS. Grey painted external sides. Interior in white High Impact Polystyrene with 30mm insulation. Inner cell with rounded corners. Door with removable "balloon" gasket. Built-in refrigeration unit; ventilated operating mode; automatic defrost; automatic evaporation of defrost water; electro-mechanical control; external digital temperature display; internal light. Temperature range +2°/+10°C at 43°C ambient temperature. CFC and HCFC free insulation. R600a gas in refrigeration circuit. Gas in foam: Cyclopentane. IP23 protection. Supplied with n.3 rilsan grids.

### Main Features

- Certified safety CE requirements.
- Internal light and lockable door.
- Refrigerators models have operating temperatures that can be adjusted from +2 to +10 °C to suit both meat and dairy storage requirements.
- Very quiet operation: noise level less than 45 dB (A).
- Temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.

### Construction

- Interior base with rounded corners, pressed from a single sheet.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- Built-in refrigeration unit.
- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- The rounded internal corners, the easily removable grids allow for ease of cleaning and high hygiene standards.
- IP23 protection index.
- Reversible door.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Internal and external doors, front and side panels and removable worktop in AISI 304 Stainless steel.
- External bottom panel in stainless steel.
- External back panel in galvanized steel.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fault code display.
- CFC and HCFC free (ecological refrigerant type: R600a).

### Sustainability

- 30 mm thick insulation with cyclopentane injection for long-term insulation and energy saving.
- CFC and HCFC-free insulation.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.

### Included Accessories

- 1 of Set of 3 grids for 160lt undercounter refrigerator, prepainted grey (only for 729456) PNC 881209

APPROVAL: \_\_\_\_\_

### Electric

Supply voltage:	
729456 (ARUCR16X16)	220-240 V/1 ph/50 Hz
729458 (AUCR16W1)	220-240 V/1 ph/50 Hz
Electrical power max.:	0.11 kW
Defrost Power:	
Plug type:	CE-SCHUKO

### Key Information:

Gross capacity:	165 lt
Net Volume:	87 lt
Door hinges:	Right Side
External dimensions, Width:	600 mm
External dimensions, Depth:	637 mm
External dimensions, Height:	850 mm
Number and type of doors:	1 Full
Internal Dimensions, Width:	544 mm
Internal Dimensions, Depth:	470 mm
Internal Dimensions, Height:	657 mm
Net weight:	38.25 kg
Shipping volume:	
729456 (ARUCR16X16)	0.4 m <sup>3</sup>
729458 (AUCR16W1)	0.44 m <sup>3</sup>
Height adjustment:	0/10 mm
Number and type of grids (included):	3 -

### Refrigeration Data




Control type:	Mechanical
Compressor power:	1/3 hp
Refrigeration power at evaporation temperature:	-12 °C
Min/Max internal humidity:	
Operating temperature min.:	2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

### Product Information (EU Regulation 2015/1094)

Type of model (EU Reg. 2015/1094):	counter chilled
------------------------------------	-----------------

### Sustainability

Current consumption:	0.6 Amps
Energy Class (EU Reg. 2015/1094):	B
Yearly and daily energy consumption (EU Reg. 2015/1094):	506kWh/year - 1kWh/24h
Climate class (EU Reg. 2015/1094):	Normal duty (cl.4)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	25,15
Refrigerant type:	R600a
GWP Index:	3
Refrigeration power:	
729456 (ARUCR16X16)	163 W
729458 (AUCR16W1)	168 W
Refrigerant weight:	28 g
Energy consumption (min,default):	
729456 (ARUCR16X16)	0 - 0 kW/h
729458 (AUCR16W1)	0 - 2.2 kW/h

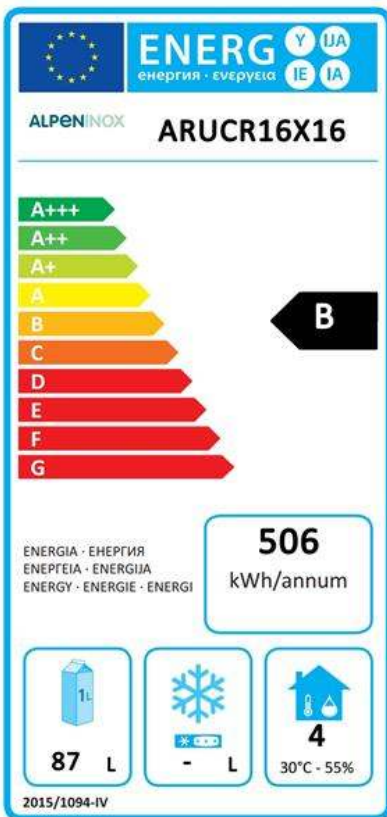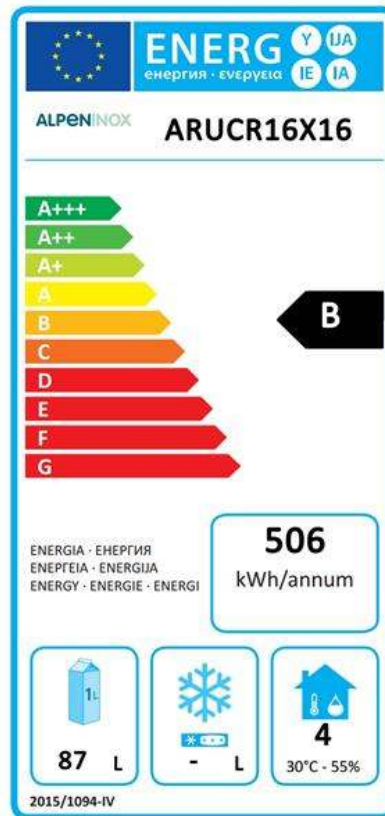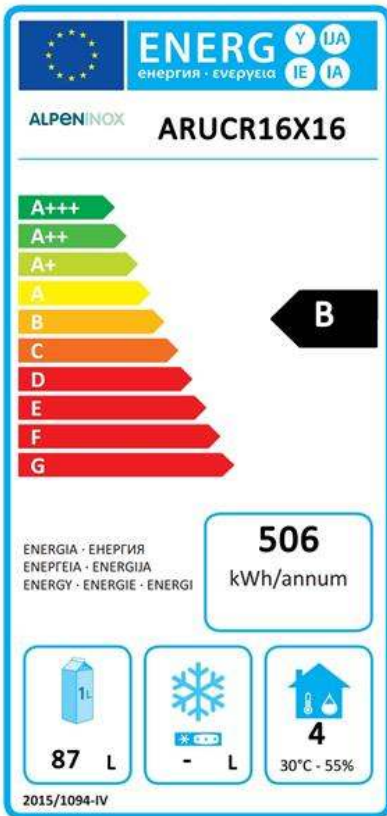

### EU energy labelling from 1st

**July 2016**

*The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.*

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.



160 Line  
1 Door Undercounter Refrigerator (+2/+10) R600a

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.10.17