

## CRIO Line CP 2 Door and 3x1/3 Drawer Refrigerated Counter, 420lt - No Top - Remote

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



712640 (AJ3R8AAC)

2-door and 3x1/3-drawer  
refrigerated counter, -2+10°C,  
full AISI 304, without work top,  
remote

### Short Form Specification

Item No. \_\_\_\_\_

AISI 304 stainless steel panels, AISI 304 bottom panel, AISI 304 back panel.  
N. 2 full doors and N. 3X1/3 drawers. For connection to a remote refrigeration  
unit (not included). Operating temperature: -2+10°C. R134a gas in  
refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Equipped with Airflow system: forced air circulation system for rapid cooling and even temperature distribution within the cell.
- 0mm clearance installation space: tower configuration cooling unit guarantee performance with frontal ventilation only; this unique solution allows installation against the wall or side by side with other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Mounted on stainless steel feet to give 150 mm (-5/+50 mm) clearance for ease of cleaning the floor.
- Combination of doors and drawers to suit any configuration needed, with the possibility to change the configuration on site. Right cooling unit available on request.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Anti-tilt runners accept GN 1/1 containers.
- Self closing stainless steel doors (< 90°).
- Certified safety CE requirements.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Digital white-digit display with internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Tropicalized unit.

### Construction

- Interior base with rounded corners, pressed from a single sheet.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- Internal and external doors, front and side panels and removable worktop in AISI 304 Stainless steel.
- Remote refrigeration unit.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fault code display.
- Extractable cooling unit to facilitate maintenance.

APPROVAL: \_\_\_\_\_

- IP21 protection index.
- Internal dimension of the drawers:
  - models with 2 1/2 drawers: 1st drawer (top drawer) 196x302x521 / 2nd drawer 198x302x521 (HxWxD)
  - models with 3 1/3 drawers: 1st and 2nd drawers (top and central drawer) 99x302x521 / 3rd drawers 103x302x521 (HxWxD)
  - models with 1/3+2/3 drawers: 1st drawer (top drawer) 99x302x521 / 2nd drawer 295x302x521 (HxWxD)

### Sustainability


- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K) and lowest environmental impact (GWP=3).
- IQ Defrost - fully automatic defrost starts only when ice is actually building-up in the evaporator and adapts the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

### Included Accessories

- 2 of Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters PNC 881109

### Optional Accessories

- Automatic defrost with waste evaporation PNC 880028
- Remote unit, -2+10°C, for 670L refrigerated cabinets and counters (R134a) PNC 880231
- 1/1GN gray rilsan grid for refrigerated counters PNC 881107
- 2 side runners for 1/1GN refrigerated counters PNC 881108
- Kit 1/1GN gray rilsan grid and 2 side runners for refrigerated counters PNC 881109
- 1/1GN plastic container, h65mm PNC 881110
- 1/1GN plastic container, h100mm PNC 881111
- 1/1GN plastic container, h150mm PNC 881112
- Worktop for refrigerated Crio Line CP and SB counters, remote - 3 compartments PNC 881131
- Worktop and upstand for refrigerated Crio Line CP and SB counters, remote - 3 compartments PNC 881135
- 2-drawer kit refrigerated counters PNC 881179
- 3x1/3-drawer kit for refrigerated counters PNC 881186
- 1/3 and 2/3 bottle drawer kit for refrigerated counters PNC 881187
- Lock for refrigerator/freezer counters with 3 compartments - h650mm PNC 881246

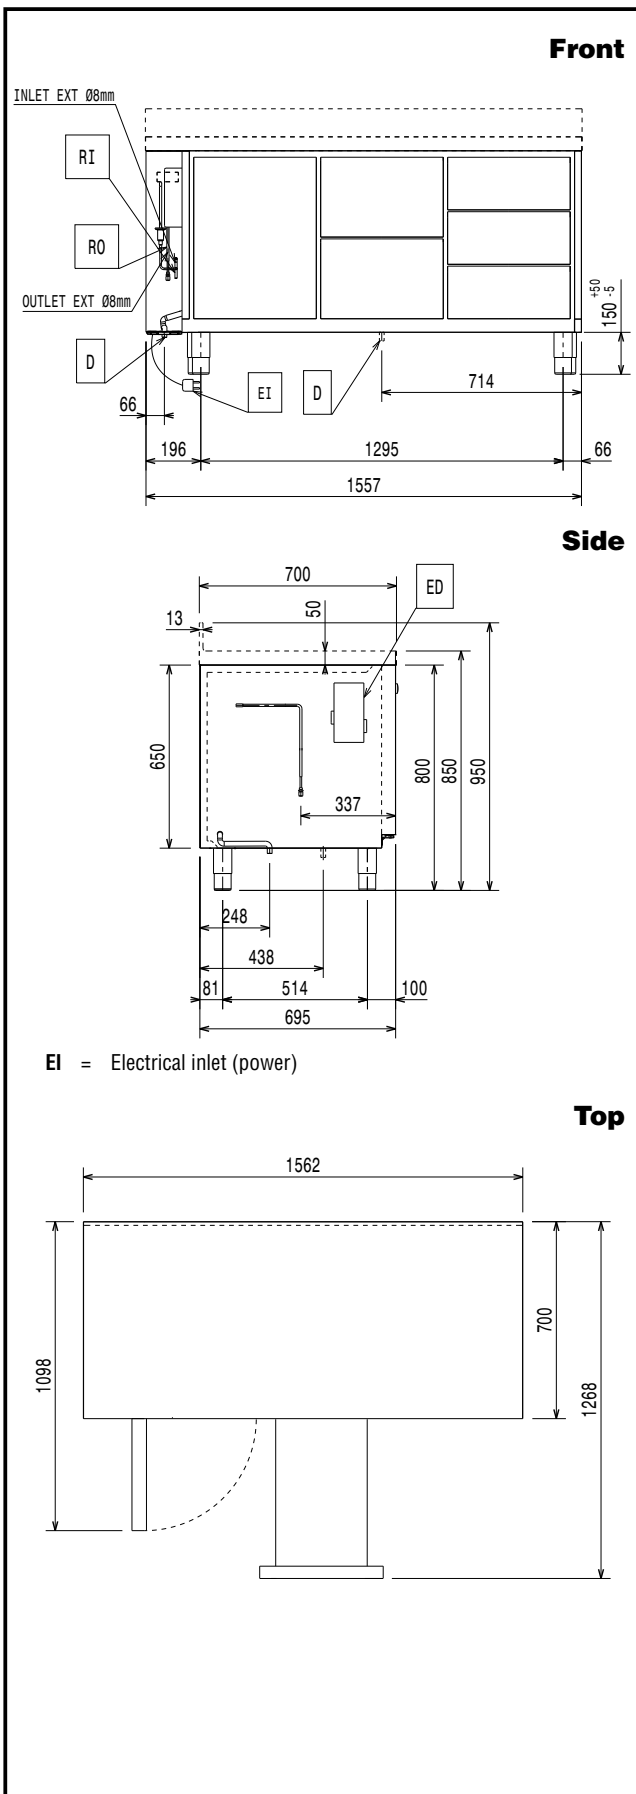

### Electric

|                        |                   |                         |
|------------------------|-------------------|-------------------------|
| Supply voltage:        | 712640 (AJ3R8AAC) | 220-240 V/1 ph/50/60 Hz |
| Electrical power max.: |                   | 0.03 kW                 |
| Defrost Power:         |                   | 0.22 kW                 |
| Plug type:             |                   | CE-SCHUKO               |

### Key Information:

|                              |                     |
|------------------------------|---------------------|
| Gross capacity:              |                     |
| Net Volume:                  | 202.4 lt            |
| Door hinges:                 | 1 Left+1 Right      |
| External dimensions, Width:  | 1557 mm             |
| External dimensions, Depth:  | 700 mm              |
| External dimensions, Height: | 800 mm              |
| Internal Dimensions, Width:  | 1252 mm             |
| Internal Dimensions, Depth:  | 560 mm              |
| Internal Dimensions, Height: | 510 mm              |
| Net weight:                  | 90 kg               |
| Shipping volume:             | 1.26 m <sup>3</sup> |
| Depth with doors open:       | 1110 mm             |
| Height adjustment:           | 5/50 mm             |

### Refrigeration Data

|  |                   |
|--|-------------------|
| Control type:                          | Digital           |
| Operating temperature min.:            | -2 °C             |
| Operating temperature max.:            | 10 °C             |
| Refrigeration type:                    | R134a;R513A;R426A |
| Operating mode:                        | Ventilated        |
| Suggested refrigeration power:         | 368 W             |
| Condition at evaporation temperature:  | -10 °C            |
| Condition at condensation temperature: | 55 °C             |
| Condition at ambient temperature:      | 32 °C             |
| Connection pipes (remote) - outlet:    | 9.5 mm            |
| Connection pipes (remote) - inlet:     | 8 mm              |

### Sustainability

|                      |          |
|----------------------|----------|
| Current consumption: | 0.3 Amps |
| GWP Index:           | 1300     |