

Saladette 2 Door Refrigerated Counter, 250lt - with Lid and Chopping board

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



729014 (ASAL25L2C9)

2-door refrigerated saladette with lid and chopping board 250L, +2+10°C, (R134A), AISI 304

Short Form Specification

Item No. _____

Constructed entirely in 304 AISI stainless steel. High-density expanded polyurethane foam, 45 mm in thickness, with cyclopentane injection. Height-adjustable feet. Hinged lid on top. Lower refrigerated compartment designed to accommodate GN 1/1 containers and equipped with N. 2 hinged doors. Built-in refrigeration unit. Ventilated. Refrigerant R134a. Digital control panel. Automatic evaporation of defrost water. Drain outlet. Suitable to operate in ambient temperatures up to +32°C. Temperature range: +2+10° C. CFC and HCFC free.

Supplied with n.9 horizontal container supports and n.1 non-toxic plastic chopping board.

Main Features

- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from 2 °C to 10 °C to suit meat, fish and dairy storage requirements.
- Digital control panel.
- Equipped with hinged lid for non-operating periods.
- Automatic evaporation of defrost water.
- Certified safety CE requirements.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Fully removable cooling unit to facilitate maintenance.
- Frontal and easy access to all components in the cooling unit.
- Hot gas automatic evaporation of defrost water.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).


Construction

- Mounted on legs with height adjustment.
- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Interior base with rounded corners, pressed from a single sheet.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Built-in refrigeration unit.
- Fault code display.

Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Kit 4 wheels for 250L refrigerated counter, saladette PNC 880267
- 1/1GN gray rilsan grid PNC 881435
- KIT HACCP EKIS PNC 922166

APPROVAL: _____

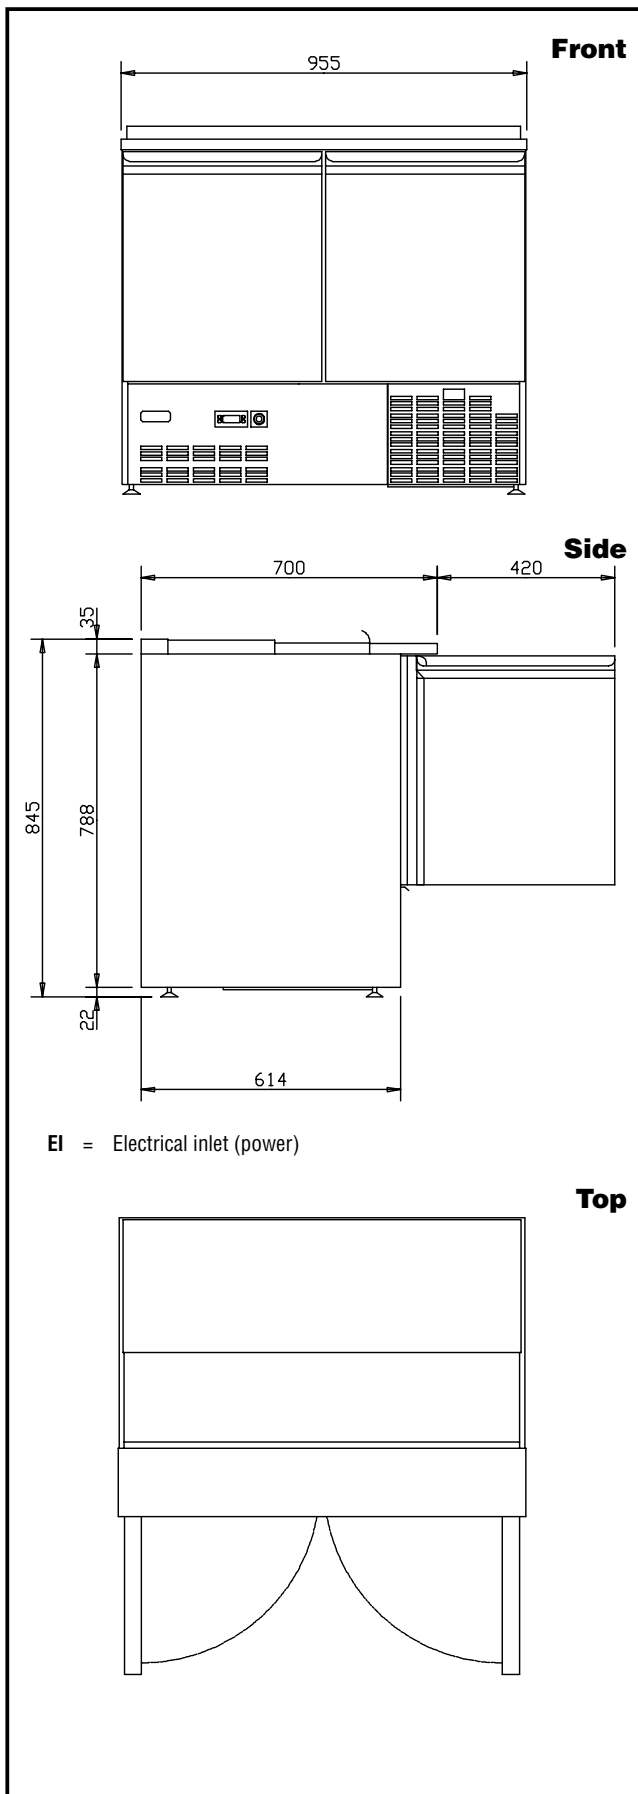

Electric

Supply voltage:	729014 (ASAL25L2C9)	220-240 V/1 ph/50 Hz
Electrical power max.:		0.29 kW
Defrost Power:		
Current consumption:		2 Amps
Plug type:		CE-SCHUKO

Key Information:

Gross capacity:	250 lt
Net Volume:	140 lt
Door hinges:	1 Left+1 Right
External dimensions, Width:	955 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	845 mm
Internal Dimensions, Width:	870 mm
Internal Dimensions, Depth:	550 mm
Internal Dimensions, Height:	520 mm
Net weight:	82 kg
Shipping volume:	0.74 m ³
Depth with doors open:	1120 mm
Height adjustment:	0/0 mm

Refrigeration Data

Control type:	Digital
Compressor power:	1/5 hp
Refrigerant type:	R134a
GWP Index:	1300
Refrigeration power:	253 W
Refrigeration power at evaporation temperature:	-20 °C
Refrigerant weight:	120 g
Min/Max internal humidity:	50/70/
Operating temperature min.:	2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

Product Information (EU Regulation 2015/1094)

Energy Class:	
Yearly and daily energy consumption:	
Climate class:	
Energy Efficiency Index (EEI):	