# I-PRO 3 BOWLS, WITH MECHANICAL CONTROL



## Ref: 562940 (IPRO3M)

Slush and sherbet machine, with 3x11-litres lighted and insulated bowls I-Tank, mechanical control, refrigerant gas R290

### **General Features**

I-PRO 3 MECHANICAL is a professional slush machine with n. 3 I-Tank insulated bowls, 11 litres each, and mechanical control.

Every detail has been studied to create a unique equipment thanks to the numerous patents and innovations available for this model.

This equipment has the I-Tank insulated tank as standard. The shape of the tanks, which work independently, guarantees a natural mixing effect for an optimal consistency of the product.

The look of this equipment is modern and eye-catchy, thanks to the LED-light system that illuminates the product inside the tank.

The equipment can dispense: slushies, milkshakes and cold drinks.

I-PRO is an ideal slush machine for bars, amusement parks, fast food chains, kiosks, restaurants, water parks and much more.

## I-PRO 3 BOWLS, WITH MECHANICAL CONTROL

#### **Specifications**

- The ITANK <sup>™</sup> Technology prevents ice accumulation on the outer side of the bowl, reducing condensation and increasing the cooling power of the machine.
- Ideal for the production of slush.
- Bowl shape allows a natural mixing action to ensure an optimum consistency of the product.
- Customizable lid merchandiser and back graphic.
- Ideal for operators who want an innovative and distinctive equipment. Mechanical keypad allows for setting of cooling and defrost modes.
- It is possible to customize the graphics on the front, on the lid and on the back (subject to negotiation).
- The insulated tank guarantees higher cooling effiency and lower effect of the external temperature on product's preparation and maintenance time reducing condesing and draining; it is the best solution in hot climate conditions.

### Construction

- Electromechanical control.
- Sliding drip tray.
- Optional Autofill Lid System available: for the automatic filling of the tanks
- The patented I-Tank insulated bowl reduces the impact of ambient temperature on the product, improving its cooling efficiency and guaranteeing energy and cost savings.



# I-PRO 3 BOWLS, WITH MECHANICAL CONTROL

#### Electric

Supply voltage:
Electrical power max.:
Current consumption:
Plug type:

220-240 V / 1 ph / 50 Hz 1.28 kW 7.4 Amps CE-SCHUKO


### **Key Information:**

Number of bowls:	3
Bowl's capacity:	11 lt
Control board:	Mechanical
Dimensions, Width:	600 mm
Dimensions, Depth:	580 mm
Dimensions, Height:	870 mm
Net weight:	81 kg
Dimensions, Height:	870 mm

#### **Refrigeration Data**

Refrigerant gas:

R290

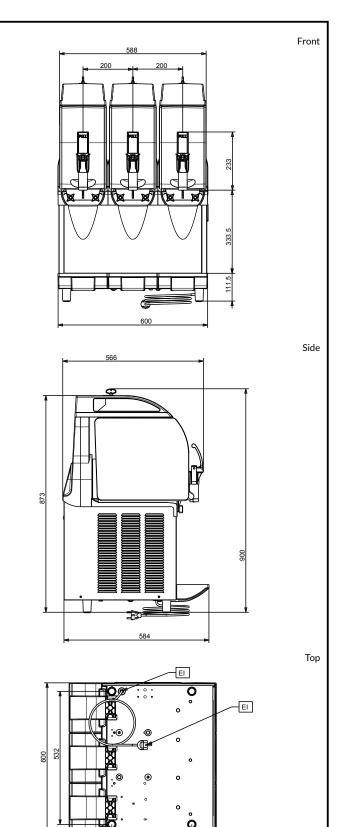

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



www.crathco.drink-systems.com infocrathco@electroluxprofessional.com

2025.03.31

Certifications