

FROSTY 3 SLUSH DISPENSER, 2 NON-INSULATED 3.2 G



Ref560517 (FROSTY3NEW)

Frosty 3, (3) 3.2 gallon bowls, LED bowl lights - Refrigerant R449A

General Features

Frosty 3, (3) 3.2 gallon tanks, 9.6 gallon total capacity - Refrigerant R449A. Frosty Frozen Dispensers are the go-to model when you want large sized, high-performance equipment, without a high investment.

Slushes, frozen cocktails, smoothies, and other frozen treats are created with a double mixing system that prevents ice accumulation, for optimum product consistency that is also adjustable. The black and stainless steel finishes and illuminated lid encourage impulse purchasing. The efficient safety mechanism is activated when cover is lifted.

FROSTY 3 SLUSH DISPENSER, 2 NON-INSULATED 3.2 G

Specifications

- Safety stop system.
- Lockable lid
- The mechanical control allows you to manually set the start the “production mode” and the “night mode” and turn on/off the LED-lights.

Construction

- Double mixing system to guarantee a perfect consistency of the dispensed product.
- Slushy machine, equipped with 3x12-litres tanks
- Versatile slush machine with three (3) 2.9 gallon/11L I-Tank insulated bowls
- Bowls work independently, allowing operations to dispense different product at the same time, including: slushies, milkshakes, cold drinks and/or frozen cocktails
- Slushy machine with three (3) 3.2 gallon tanks, 9.6 gallon/36 L total capacity

FROSTY 3 SLUSH DISPENSER, 2 NON-INSULATED 3.2 G

Electric

Supply voltage:	115 V / 1 ph / 60 Hz
Electrical power max.:	1.2 kW
Current consumption:	13.2 Amps
Plug type:	USA NEMA 5-20P

Key Information:

Number of bowls:	3
Bowl's capacity:	3.2 gal
Control board:	Mechanical
Dimensions, Width:	23 5/8"
Dimensions, Depth:	21 7/8"
Dimensions, Height:	32 1/2"
Net weight:	71 kg
Cooling system:	AIR

Refrigeration Data

Refrigerant gas:	R449a
------------------	-------


Certifications




The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2024.10.08


Front

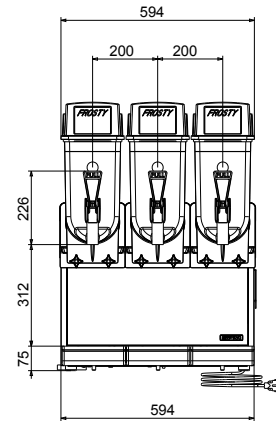

Side

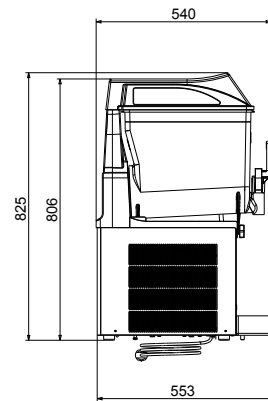

Other



CRATHCO

www.crathco.drink-systems.com
infocrathco@electroluxprofessional.com