

I-PRO SLUSH DISPENSER, 2 INSULATED 2.9 G. BOWLS, MECHANICAL, WITH LIGHTED PANEL,



Ref560535 (IPRO2MTL)

I-PRO 2M with lighted panel, (2) 2.9 gallon insulated bowls, Mechanical control and timer, black finish, refrigerant R449A

General Features

I-PRO 2 MECHANICAL with lighted panel is a versatile slush machine with (2) 2.9 gallon (11L) I-Tank insulated bowls, mechanical control and LED-light front panel. Refrigerant R449A.

Every feature has been developed to create a professional, reliable and high-quality slush machine equipment thanks to the numerous patents and innovations. This equipment has the I-Tank insulated tank as standard. The shape of the tanks, which work independently, guarantees a natural mixing effect for an optimal consistency of the product. The look of this equipment is modern and eye-catching, thanks to the LED-light system that illuminates the product and attracts customers. The equipment can dispense: slushies, granitas, milkshakes and other frozen drinks. I-PRO is an ideal slush machine for bars, amusement parks, fast food chains, kiosks, restaurants, water parks and much more.

I-PRO SLUSH DISPENSER, 2 INSULATED 2.9 G. BOWLS, MECHANICAL, WITH LIGHTED PANEL,

Specifications

- I-PRO is an ideal slush machine for bars, amusement parks, motorway restaurants, fast food chains, kiosks, restaurants, water parks and much more.
- Versatile slush machine with two (2) 2.9 gallon/11L I-Tank insulated bowls

Construction

- The patented I-Tank insulated bowl reduces the impact of ambient temperature on the product, improving its cooling efficiency and guaranteeing energy and cost savings.
- The LED backlit frontal panel gives maximum visibility to the equipment.
- The mechanical control allows you to manually set the “production mode” and the “night mode”.
- Optional Autofill Lid System available: for the automatic filling of the tanks
- Bowls work independently, allowing operations to dispense different product at the same time, including: slushies, milkshakes, cold drinks and/or frozen cocktails

I-PRO SLUSH DISPENSER, 2 INSULATED 2.9 G. BOWLS, MECHANICAL, WITH LIGHTED PANEL,

Electric

| | |
|------------------------|--------------------------|
| Supply voltage: | 115 V / 1 ph / 60 Hz |
| Electrical power max.: | 0.9 kW |
| Current consumption: | ISO 9001; ISO 14001 Amps |
| Plug type: | USA NEMA 5-15P |

Key Information:

| | |
|---------------------|------------|
| Number of bowls: | 2 |
| Control board: | Mechanical |
| Cooling system: | AIR |
| Bowl's capacity: | 2.9 gal |
| Dimensions, Width: | 15 3/4" |
| Dimensions, Depth: | 22 13/16" |
| Dimensions, Height: | 34 1/4" |
| Net weight: | 132 lb |

Refrigeration Data


| | |
|------------------|-------|
| Refrigerant gas: | R449a |
|------------------|-------|

Certifications



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.04.29

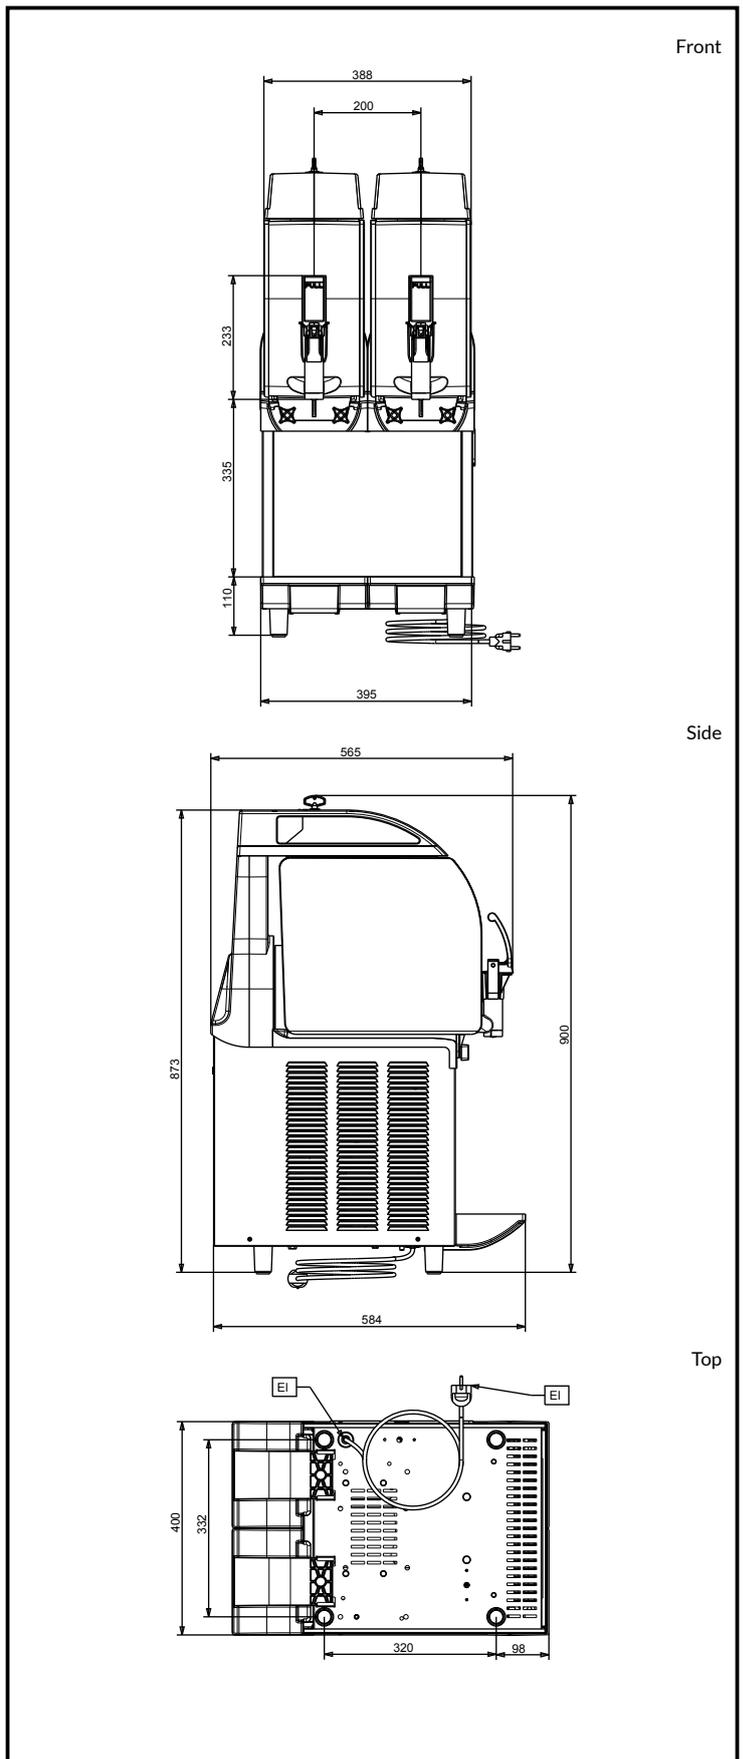

CRATHCO

www.crathco.drink-systems.com
infocrathco@electroluxprofessional.com