



Planetary Mixers Planetary Mixer, 5 lt. - Electronic

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



600137 (DBE5BY)

5 lt planetary mixer, bowl detection device, electronic speed variation. Equipped with stainless steel spiral hook, paddle and whisk. Equipped with highly resistant safety screen - BPA free

Short Form Specification

Item No. _____

Suitable for all kneading, blending and whipping operations. Aluminium body and metal base for complete stability. 5 litre capacity 18/10 (AISI 304) stainless steel bowl. Powerful asynchronous motor with electronic speed variation from 20 to 220 rpm (planetary movement). Removable/transparent solid safety screen - made of a bisphenol-A free (BPA) copolyester - activates the raising and lowering of the bowl. Bowl detection device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Supplied with 3 stainless steel dw safe tools: spiral hook, paddle and whisk.

Main Features

- Professional compact table top beater mixer for intensive kneading, mixing and whipping.
- Maximum capacity 1.5 kg flour, with 60% of hydration.
- Delivered with: Spiral Hook, Paddle, Wire Whisk and Mixing Bowl for 5 lt. All made in stainless steel and dishwasher safe.
- Tools shape and size perfectly adapt to the bowl for uniform mixing of even small quantities.
- Electronic speed variator.
- Ergonomic and reliable knob to select the speed adjusting to the tool and mixture hardness.
- Removable safety screen activates the raising and lowering of the bowl.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.

Construction

- 304 AISI stainless steel bowl - 5 lt capacity.
- Compact and portable design.
- Asynchronous motor with high start-up torque.
- Variable speed from 20 to 220 rpm (planetary movement), to adjust to the selected tool and mixture hardness.
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Water protected planetary system (IP55 electrical controls, IP34 overall machine).
- Transparent solid safety screen made of Eastman Tritan™ copolyester BPA free, impact resistant and stays clear and durable after several dishwashing cycle.
- Variable speed rotation of the tools from 67 rpm to 740 rpm.

Included Accessories

- 1 of BOWL FOR 5LT MIXER PNC 653295
- 1 of S/S PADDLE FOR 5LT MIXER PNC 653756
- 1 of S/S WHISK FOR 5LT MIXER PNC 653757
- 1 of S/S SPIRAL DOUGH HOOK FOR 5LT MIXER PNC 653765

Optional Accessories

- BOWL FOR 5LT MIXER PNC 653295 ☐
- S/S PADDLE FOR 5LT MIXER PNC 653756 ☐
- S/S WHISK FOR 5LT MIXER PNC 653757 ☐

APPROVAL: _____





Planetary Mixers Planetary Mixer, 5 lt. - Electronic

- S/S SPIRAL DOUGH HOOK FOR 5LT MIXER PNC 653765 ☐
- CLOSED SPLASH GUARD - BE5/8 WITHOUT HUB PNC 653781 ☐



Planetary Mixers
Planetary Mixer, 5 lt. - Electronic
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.


2025.04.20




Planetary Mixers

Planetary Mixer, 5 lt. - Electronic

Front

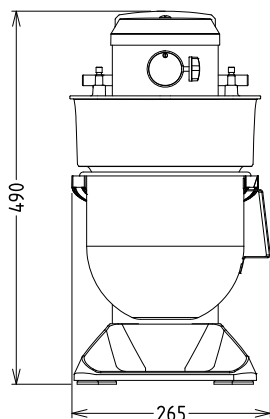


Side

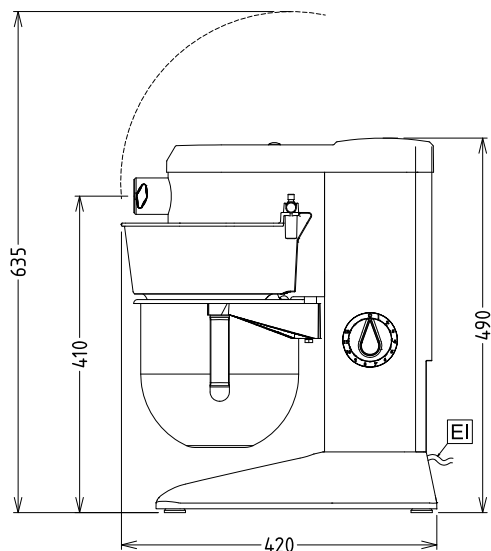

EI = Electrical inlet
(power)

Top

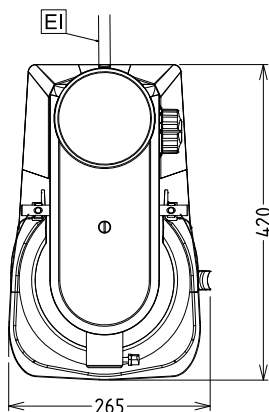

Electric

| | |
|-------------------------------|--------------------------|
| Supply voltage: | 200-240 V/1N ph/50/60 Hz |
| Electrical power max.: | 0.45 kW |
| Total Watts: | 0.45 kW |

Capacity:

| | |
|-----------------------------|--------------|
| Performance (up to): | 1.5 kg/Cycle |
| Capacity: | 5 litres |

Key Information:

| | |
|-------------------------------------|-------------------------|
| External dimensions, Width: | 266 mm |
| External dimensions, Depth: | 416 mm |
| External dimensions, Height: | 487 mm |
| Shipping weight: | 19 kg |
| Net weight (kg): | 17 |
| Cold water paste: | 1.5 kg with Spiral hook |
| Egg whites: | 10 with Whisk |

Planetary Mixers
Planetary Mixer, 5 lt. - Electronic

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.04.20

