

Vegetable Slicer Vegetable slicer, variable speed

TEM #	
MODEL#	
NAME#	
SIS #	
AIA #	
	_



602221 (DVSVSAU)

Vegetable slicer variable speed 500-1200rpm -Australia

Short Form Specification

Item No.

Vegetable slicer ensures consistent cutting results thanks to the design patented lever-pusher. Constructed in a sturdy plastic material. 1,25 liters transparent half-moon hopper. Vegetables can be fed directly into the half moon hopper, a pusher presses the vegetables against the cutting discs ensuring an even cut in minimal time. 2 small hoppers for precise cuts on long vegetables dia. 55mm or 25mm. Ideal for grating, slicing/wavy slice, julienne and dicing. A safety micro switch stops the blade when the feed hopper is opened. No-volt release system prevents accidental start of the appliance. All parts in contact with food are removable and Dishwasher safe. Variable speed with 5 levels (500 to 1200 rpm) for high quality cuts.

Main Features

- Flexibility for high quality cuts: 5-level variable speed (500-1200 rpm) can be adjusted according to consistency of ingredients.
- Vegetable slicer unit has slicing, grating, shredding (julienne) as well as dicing and french fries capabilities.
- Equipped with half moon hopper (1,25lt capacity) and 2 small round feed chutes: Ø 25mm and Ø 55mm, for precise slicing of long shaped vegetables.
- Uniform cuts and maximised load capacity, thanks to the design patented lever-pusher.
- Large output chute for efficient ejection. Fits up to 200mm high standard kitchen containers (like GN) under the output chute.
- Continuous feed model.
- Pulse function for quick and precise slicing and grating.
- Ergonomical frontal lever, suitable for left handed and right handed operators.
- Vegetable slicer blade stops when lever pusher is lifted for operator safety.
- Optional discs and grids available of various sizes for slicing, dicing, grating and shredding (diam. 175mm).
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Flat and waterproof control panel with on/ off button and pulse function.
- Productivity up to 100 settings per service.

Construction

- compact design, easy to move and store.
- IPX5 (IP55) flat panel touch-control, waterproof panel.
- Main switch ON/OFF on the back of the appliance.
- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- Motor power: 750 Watt.
- Food safety assured in accordance to European directives and UK legislation. In addition, materials in contact with food, are BPA-free.
- Product safety conform to European directives, UK legislation and international health and safety standards.

APPROVAL:



Included Accessories

• 1 of EJECTOR FOR VEGETABLE PNC 650232 SLICER

Optional Accessories

•	CLEANING TOOL FOR TRS-TRK- TRK210 5/8/10MM DICING GRIDS	PNC 650110	
•	3 DISCS SET TRK1 (2MM SLICER, 5MM SLICER, 3MM GRATER)	PNC 650196	
•	6 DISCS SET (2MM SLICING, 5MM SLICING, 3MM GRATING, 7MM GRATING, 10MM SLICER, 10X10MM GRID)	PNC 650197	
•	STAINLESS STEEL GRATING DISC 2 MM (DIA. 175 MM)	PNC 650198	

	2 MM (DIA. 175 MM)		
•	STAINLESS STEEL GRATING DISC 3 MM (DIA. 175 MM)	PNC 650199	

	3 MM (DIA. 175 MM)		
•	STAINLESS STEEL GRATING DISC 4 MM (DIA. 175 MM)	PNC 650205	
	CTAINILECC CTEEL CDATING DICC	DNIC CEOOOT	

•	STAINLESS STEEL GRATING DISC 7 MM (DIA. 175 MM)	PNC 650207	
	DADA (ECANI DICC	DNIC CEOOO	

•	PARMESAN DISC	PNC 650208	
•	STAINLESS STEEL SHREDDING DISC 2 MM (DIA. 175 MM)	PNC 650209	

• STAINLESS STEEL SHREDDING DISC 4 MM (DIA. 175 MM)	PNC 650210	
CTAINLECC CTEEL CLIDEDDING	DNC CEONI	

 STAINLESS STEEL SHREDDING 	PNC 650211	
DISC 8 MM (DIA. 175 MM) -		
FRENCH FRIES		

•	STAINLESS STEEL SLICING DISC 1	PNC 650213	
	MM (DIA. 175 MM)		

•	STAINLESS STEEL SLICING DISC 2	PNC 650214	
	MM (DIA. 175 MM)		

•	STAINLESS STEE	L SLICING DISC 3	PNC 650215	
	MM (DIA. 175 MM	1)		

•	STAINLESS STEEL SLICING DISC 5	PNC 650216	[
	MM (DIA. 175 MM)		

•	STAINLESS STEEL SLICING DISC 6	PNC 650217	
	MM (DIA. 175 MM)		

•	STAINLESS STEEL WAVY SLICING	PNC 650218	
	DISC 3 MM (DIA. 175 MM)		

•	STAINLESS STEEL WAVY SLICING	PNC 650219	[
	DISC 5 MM (DIA. 175 MM)		

	(
•	ALUMINUM SLICING DISC 8 MM	PNC 650220	
	(DIA. 175 MM)		

	`	,			
•	ALUMINUM	SLICING	DISC 10 MM	PNC 650221	
	(DIA. 175 MN	4)			

•	DICING GRID 8X8 (DIA 175 MM)	PNC 650222	
•	DICING GRID 10X10 (DIA 175 MM)	PNC 650223	

-	Brente ente lexte (Bi) (175 min)	1110 030223	_
•	DICING KIT 8MM (ALUMINUM	PNC 650224	
	SLICER 8MM, GRID 8X8MM) - DIA.		
	175 MM		

•	DICING KIT 10MM (ALUMINUM	PNC 650225	
	SLICER 10MM, GRID 10X10 MM) -		
	DIA. 175 MM		

•	EJECTOR FOR VEGETABLE	PNC 650232	
	SLICER		


•	STAINLESS STEEL SLICING DISC 4	PNC 650237	
	MM (DIA. 175 MM)		

•	SUPPORT FOR 1 DISC-DIAM	PNC 653632	
	175MM AND 205MM		





Vegetable Slicer Vegetable slicer, variable speed

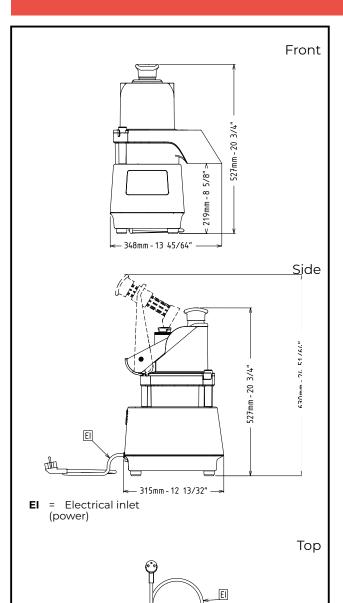

Electric Supply voltage: 220-240 V/1N ph/50/60 Hz **Electrical power max.:** 0.75 kW 0.75 kW **Total Watts:** Capacity: Performance (up to): **Capacity:** 0 litres Key Information: External dimensions, Width: 348 mm External dimensions, 315 mm Depth: External dimensions, Height: 527 mm 19.6 kg **Shipping weight:** Net weight (kg): 15 **Cold water paste:**

Egg whites:



.315mm-12 13/32"





348mm - 13 45/64"

