



Hand held Mixers Bermixer PRO Turbo 550 W with Stainless Steel Tube (453-553mm)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



600330 (DBP5555)

Portable mixer, variable speed up to 10000 rpm, with stainless steel tube 553 mm, 550W

600322 (DBP5545)

Portable mixer, variable speed up to 10000 rpm, with stainless steel tube 453 mm, 550W

Short Form Specification

Item No. _____

Handheld mixer with stainless steel tube and space saving storing wall support. To be used directly in stew pots, even during cooking. Bayonet system ensures easy removal of accessories. Parts in contact with food - tube, blade, shaft - completely dismountable without tools for easy cleaning. Bell knife design ensures antisplash system and minimum handling during working operations. Flat motor base with ergonomic handle for a convenient grip. Electronic speed variator with speed regulation regardless of the load. Electronic speed adjustment by pulse on + and - buttons. Maximum speed: 10000 rpm. Safety feature requires both hands to start the machine. Design for heavy duty usage: double fan system to cool down the motor. Visible and water proof (IP55) control panel to control speed levels and overload warning light. Shaft locking device avoids release during operation. Whisk accessory available as an option.

Main Features

- Parts in contact with food - tube, blade, shaft - can be completely dismounted without tools for easy cleaning.
- Delivered with:
 - flat base motor
 - stainless steel tube
 - space saving storing wall support
- Designed to be used directly in stew pots up to 150 lt with the 45 cm tube and 170 lt with the 55 cm tube.
- Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
- Anti-splash bell knife design.
- Bayonet system makes fast and simple to exchange tools.
- Overheating warning red indicator.
- Tube, knife and whisks are dishwasher safe.
- Safety feature requires both hands to start the mixer (no volt release system).
- Productivity suitable for 50 to 300 meals per service.

Construction

- Power: 550 watts.
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
- Maximum speed 10000 rpm.
- Smart speed control to ensure the right power according to the work load.
- Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories

- 1 of 453 mm stainless steel tube for portable mixer bermixer (only for 600322) PNC 650133
- 1 of 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) (only for 600330) PNC 650134

Optional Accessories

- Reinforced whisk for portable Bermixer PNC 650108 ☐
- 353 mm stainless steel tube for portable mixer bermixer PNC 650132 ☐
- 453 mm stainless steel tube for portable mixer bermixer PNC 650133 ☐
- 553 mm stainless steel tube for Bermixer (for 450W, 550W, 650W, 750W) PNC 650134 ☐

APPROVAL: _____



Hand held Mixers Bermixer PRO Turbo 550 W with Stainless Steel Tube (453-553mm)

- Adjustable rail for containers
diam. 375 mm to 650 mm (to be
used with 653294) PNC 653292 ☐
- Holder to support portable mixer
in containers (can be used only
with tube attachment) PNC 653294 ☐



Hand held Mixers
Bermixer PRO Turbo 550 W with Stainless Steel Tube (453-553mm)


The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.09.06



Hand held Mixers Bermixer PRO Turbo 550 W with Stainless Steel Tube (453-553mm)

Front

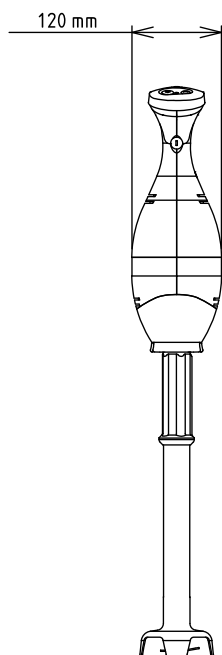


Side



EI = Electrical inlet
(power)

Top



Electric

Supply voltage:	220-240 V/1 ph/50/60 Hz
Electrical power, max:	0.55 kW
Total Watts:	0.55 kW

Capacity:

Capacity (up to):	
600330 (DBP5555)	170 Litre
600322 (DBP5545)	150 Litre

Key Information:

External dimensions, Width:	138 mm
External dimensions, Depth:	120 mm
External dimensions, Height:	
600330 (DBP5555)	865 mm
600322 (DBP5545)	765 mm
Shipping weight:	
600330 (DBP5555)	1 kg
600322 (DBP5545)	5.64 kg



Hand held Mixers
Bermixer PRO Turbo 550 W with Stainless Steel Tube (453-553mm)
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.09.06