

# 'R260 vegetable slicer, 1 speed mm and O raun



# Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

ITEM #	
MODEL#	
NAME #	
SIS#	
AIA#	



CC0H5N (DTR260L1VS)

TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

# **Short Form Specification**

Item No.

Universal vegetable slicer for caterers serving 400 to 600 meals/sitting. 1 speed (330 rpm). 1500 watts self-braking motor. Stainless steel motor housing and aluminium basement. "No volt release" safety device. Touch button control panel with on/off and pulse function. Cutting disc diam. 300mm. Supplied with lever-operated hopper and mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm). The touch button control panel has IP65 protection with low voltage level.

### **Main Features**

- Suitable for up to 600 meals for table service and up to 2000 meals for catering service.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Pulse function for precise cutting.
- Delivered with lever operated hopper and a mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm)
- Large round (long vegetable) and large half moon feed hoppers.
- "No volt release" safety device.
- Complete selection of blades and dicing grids available (diameter 300 mm).
- Available as option a long vegetable accessory to fit in the lever operated hopper converting it into a long vegetable hopper (3 cylindrical hoppers: 50, 59,5, 70 mm diameter)
- Available upon request:
   Automatic cylindrical hopper (dia=280 mm), long vegetable hopper (3 tubes) and cabbage hopper.
- Continuous feed model.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.

### Construction

- Stainless steel motor housing with aluminum basement.
- 1 speed: 330 rpm
- Power: 1500 watts.
- 1 of **650150** (J302N) Stainless steel grating disc 2 mm (dia. 300 mm)
  - **Shipping weight:** 1.83 kg
- 1 of **650151** (J303N) Stainless steel grating disc 3 mm (dia. 300 mm)
  - **Shipping weight:** 1.82 kg
- 1 of **653172** (C302) Slicing disc 2 mm (dia. 300 mm)
  - **Shipping weight:** 2.11 kg
- 1 of **653173** (C303) Slicing disc 3 mm (dia. 300 mm)
  - **Shipping weight:** 3 kg

APPROVAL:




# Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

Optional Accessories			<ul> <li>Disc with corrugated blades 2 mm PNC 653217 (dia. 300 mm)</li> </ul>	
<ul> <li>Feed tray to be combined with cabbage hopper and long</li> </ul>	PNC 650036		<ul> <li>Disc with corrugated blades 3 mm PNC 653218 (dia. 300 mm)</li> </ul>	
<ul><li>vegetable hopper</li><li>Stainless steel grating disc for</li></ul>	PNC 650148		<ul> <li>Disc with corrugated blades 6 mm PNC 653219 (dia. 300 mm)</li> </ul>	
parmesan (dia. 300 mm)  • Stainless steel grating disc for	PNC 650149		lever-operated hopper (to change	
knoedeln (dia. 300 mm)  • Stainless steel grating disc 2 mm	PNC 650150		the lever-operated hopper into long vegetable hopper)	
(dia. 300 mm)  • Stainless steel grating disc 3 mm	PNC 650151		<ul> <li>Stainless steel trolley suitable to hold PNC 653224 one 2/1 GN container (GN container not included)</li> </ul>	
<ul><li>(dia. 300 mm)</li><li>Stainless steel grating disc 4 mm (dia. 300 mm)</li></ul>	PNC 650152			
Stainless steel grating disc 7 mm (dia. 300 mm)	PNC 650153		used with cabbage feed hopper)	
Stainless steel grating disc 9 mm (dia. 300 mm)	PNC 650154		shaft for stem removal 3 mm (to be used with cabbage feed hopper)	
Stainless steel cabbage grating disc with central shaft for stem removal 7 mm - to be combined with cabbage hopper	PNC 650157		3 3	
Cabbage slicing disc with central shaft for stem removal 1 mm (to be used with cabbage feed hopper)	PNC 653009			
Stainless steel mobile stand. Height: 730 mm for BPO models	PNC 653017			
<ul> <li>Lever-operated hopper for TR260 (including feed tray)</li> </ul>	PNC 653036			
<ul><li>Automatic feed hopper for TR260</li><li>Large hopper for TR260, diam.</li></ul>	PNC 653037 PNC 653048			
280mm  • Dicing grid 10 mm for TR260	PNC 653051	_		
Dicing grid 16 mm for TR260	PNC 653052			
<ul> <li>Dicing grid 10 mm for TR260</li> </ul>	PNC 653053			
	PNC 653054			
• Dicing grid 25 mm for TR260				
Dicing grid 32 mm for TR260	PNC 653055			
<ul> <li>Slicing disc 2 mm (dia. 300 mm)</li> </ul>	PNC 653172			
<ul> <li>Slicing disc 3 mm (dia. 300 mm)</li> </ul>	PNC 653173			
<ul> <li>Slicing disc 1 mm (dia. 300 mm)</li> </ul>	PNC 653188			
<ul> <li>Slicing disc 5 mm (dia. 300 mm)</li> </ul>	PNC 653189			
<ul> <li>Slicing disc 6 mm (dia. 300 mm)</li> </ul>	PNC 653190			
• Slicing disc 8 mm (dia. 300 mm)	PNC 653191			
• Slicing disc 10 mm (dia. 300 mm)	PNC 653192			
• Slicing disc 16 mm (dia. 300 mm)	PNC 653193			
Shredding disc 2x2 mm (dia. 300 mm)	PNC 653195	_		
<ul> <li>Shredding disc 3x3 mm (dia. 300 mm)</li> </ul>	PNC 653196			
<ul> <li>Shredding disc 4x4 mm (dia. 300 mm)</li> </ul>	PNC 653197			
<ul> <li>Shredding disc 6x6 mm (can also be used for chips - dia. 300 mm)</li> </ul>	PNC 653198			
<ul> <li>Shredding disc 8x8 mm (can also be used for chips - dia. 300 mm)</li> </ul>	PNC 653199			
<ul> <li>Shredding disc 10x10mm (can also be used for chips - dia. 300 mm)</li> </ul>	PNC 653200			
<ul> <li>Stainless steel disc rack for 300 dia. discs (to be fitted on the mobile stand basement)</li> </ul>	PNC 653212			





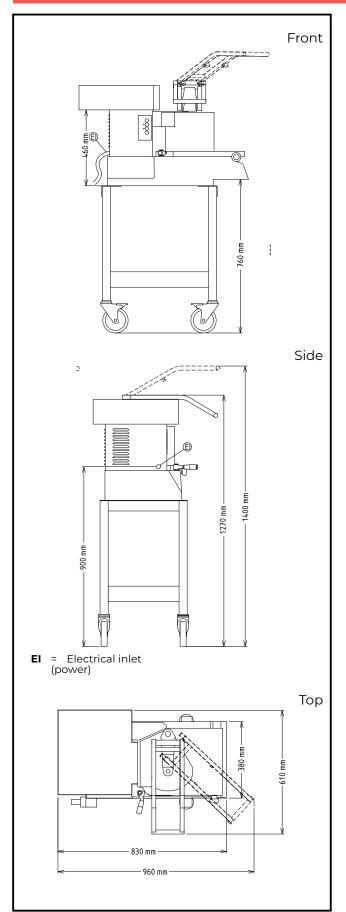

Electric

Supply voltage: 220-240 V/1N ph/50 Hz
Electrical power, max: 1.5 kW

Total Watts: 1.5 kW

Capacity:

**Performance (up to):** 700 kg/hour Key Information:

External dimensions, Width:

**External dimensions, Depth:** 830 mm

External dimensions,

Height: 1400 mm

**Shipping weight:**