

'R260 vegetable slicer, 1 speed mm and O raun



Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

ITEM #	
MODEL#	
NAME #	
SIS#	
AIA#	



CC0H5N (DTR260L1VS)

TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

Short Form Specification

Item No.

Universal vegetable slicer for caterers serving 400 to 600 meals/sitting. 1 speed (330 rpm). 1500 watts self-braking motor. Stainless steel motor housing and aluminium basement. "No volt release" safety device. Touch button control panel with on/off and pulse function. Cutting disc diam. 300mm. Supplied with lever-operated hopper and mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm). The touch button control panel has IP65 protection with low voltage level.

Main Features

- Suitable for up to 600 meals for table service and up to 2000 meals for catering service.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Pulse function for precise cutting.
- Delivered with lever operated hopper and a mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm)
- Large round (long vegetable) and large half moon feed hoppers.
- "No volt release" safety device.
- Complete selection of blades and dicing grids available (diameter 300 mm).
- Available as option a long vegetable accessory to fit in the lever operated hopper converting it into a long vegetable hopper (3 cylindrical hoppers: 50, 59,5, 70 mm diameter)
- Available upon request:
 Automatic cylindrical hopper (dia=280 mm), long vegetable hopper (3 tubes) and cabbage hopper.
- Continuous feed model.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.

Construction

- Stainless steel motor housing with aluminum basement.
- 1 speed: 330 rpm
- Power: 1500 watts.
- 1 of **650150** (J302N) Stainless steel grating disc 2 mm (dia. 300 mm)
 - **Shipping weight:** 1.83 kg
- 1 of **650151** (J303N) Stainless steel grating disc 3 mm (dia. 300 mm)
 - **Shipping weight:** 1.82 kg
- 1 of **653172** (C302) Slicing disc 2 mm (dia. 300 mm)
 - **Shipping weight:** 2.11 kg
- 1 of **653173** (C303) Slicing disc 3 mm (dia. 300 mm)
 - **Shipping weight:** 3 kg

APPROVAL:




Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

Optional Accessories				Disc with corrugated blades 2 mm (dia. 300 mm)	PNC 653217	
 Feed tray to be combined with cabbage hopper and long 	PNC 650036			Disc with corrugated blades 3 mm (dia. 300 mm)	PNC 653218	
vegetable hopperStainless steel grating disc for	PNC 650148			Disc with corrugated blades 6 mm (dia. 300 mm)	PNC 653219	
parmesan (dia. 300 mm) • Stainless steel grating disc for	PNC 650149		•	Long vegetable accessory for TR260 lever-operated hopper (to change	PNC 653223	
knoedeln (dia. 300 mm) • Stainless steel grating disc 2 mm	PNC 650150	_		the lever-operated hopper into long vegetable hopper)		
(dia. 300 mm)			•	Stainless steel trolley suitable to hold one 2/1 GN container (GN container	PNC 653224	
Stainless steel grating disc 3 mm (dia. 300 mm)	PNC 650151			not included) Cabbage slicing disc with central	PNC 653227	
Stainless steel grating disc 4 mm (dia. 300 mm)	PNC 650152		:	shaft for stem removal 2 mm (to be used with cabbage feed hopper)	FINC 033227	_
 Stainless steel grating disc 7 mm (dia. 300 mm) 	PNC 650153		•	Cabbage slicing disc with central shaft for stem removal 3 mm (to be	PNC 653228	
 Stainless steel grating disc 9 mm (dia. 300 mm) 	PNC 650154			used with cabbage feed hopper)	DNC (F7701	
 Stainless steel cabbage grating disc with central shaft for stem removal 7 mm - to be combined with cabbage hopper 	PNC 650157		•	Dicing grid 12 mm for TR260 Long vegetable hopper with 3 tubes diam. 50 to 70 mm for TR260	PNC 653301 PNC 653306	
Cabbage slicing disc with central shaft for stem removal 1 mm (to be used with cabbage feed hopper)	PNC 653009					
• Stainless steel mobile stand. Height: 730 mm for BPO models	PNC 653017					
 Lever-operated hopper for TR260 (including feed tray) 	PNC 653036					
 Automatic feed hopper for TR260 	PNC 653037					
 Large hopper for TR260, diam. 280mm 	PNC 653048					
 Dicing grid 10 mm for TR260 	PNC 653051					
 Dicing grid 16 mm for TR260 	PNC 653052					
 Dicing grid 20 mm for TR260 	PNC 653053					
 Dicing grid 25 mm for TR260 	PNC 653054					
 Dicing grid 32 mm for TR260 	PNC 653055					
 Slicing disc 2 mm (dia. 300 mm) 	PNC 653172					
 Slicing disc 3 mm (dia. 300 mm) 	PNC 653173					
Slicing disc 1 mm (dia. 300 mm)	PNC 653188					
• Slicing disc 5 mm (dia. 300 mm)	PNC 653189					
• Slicing disc 6 mm (dia. 300 mm)	PNC 653190					
• Slicing disc 8 mm (dia. 300 mm)	PNC 653191					
• Slicing disc 10 mm (dia. 300 mm)	PNC 653192					
 Slicing disc 16 mm (dia. 300 mm) Shredding disc 2x2 mm (dia. 300 mm) 	PNC 653193 PNC 653195					
mm) • Shredding disc 3x3 mm (dia. 300 mm)	PNC 653196					
Shredding disc 4x4 mm (dia. 300 mm)	PNC 653197					
 Shredding disc 6x6 mm (can also be used for chips - dia. 300 mm) 	PNC 653198					
 Shredding disc 8x8 mm (can also be used for chips - dia. 300 mm) 	PNC 653199					
 Shredding disc 10x10mm (can also be used for chips - dia. 300 mm) 	PNC 653200					
Stainless steel disc rack for 300 dia. discs (to be fitted on the mobile stand basement)	PNC 653212					







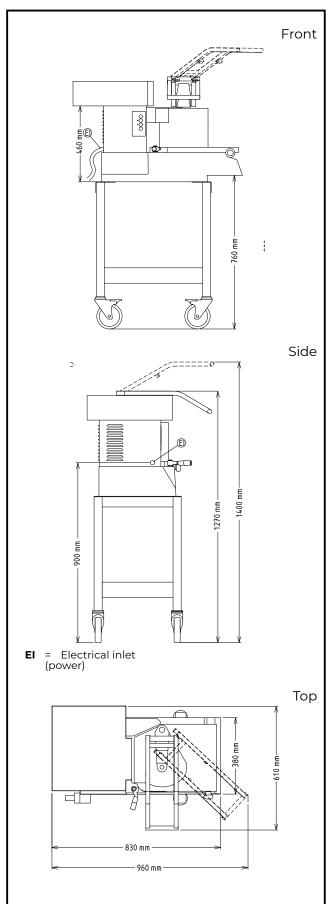

Electric

Supply voltage: 220-240 V/1N ph/50 Hz

Electrical power, max: 1.5 kW Total Watts: 1.5 kW

Capacity:

Performance (up to): 700 kg/Cycle

Key Information:

External dimensions,

Width:

External dimensions,

Depth:

External dimensions,

Height: Shipping weight: 830 mm

1400 mm