

'R260 vegetable slicer, 1 speed mm and O raun ര



Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

ITEM #	
MODEL#	
NAME #	
SIS#	
AIA#	



CC0H5N (DTR260L1VS)

TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

Short Form Specification

Item No.

Universal vegetable slicer for caterers serving 400 to 600 meals/sitting. 1 speed (330 rpm). 1500 watts self-braking motor. Stainless steel motor housing and aluminium basement. "No volt release" safety device. Touch button control panel with on/off and pulse function. Cutting disc diam. 300mm. Supplied with lever-operated hopper and mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm). The touch button control panel has IP55 protection with low voltage level.

Main Features

- Suitable for up to 600 meals for table service and up to 2000 meals for catering service.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Pulse function for precise cutting.
- Delivered with lever operated hopper and a mobile stainless steel support that incorporates a disc storage rack with 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm)
- Large round (long vegetable) and large half moon feed hoppers.
- "No volt release" safety device.
- Complete selection of blades and dicing grids available (diameter 300 mm).
- Available as option a long vegetable accessory to fit in the lever operated hopper converting it into a long vegetable hopper (3 cylindrical hoppers: 50, 59,5, 70 mm diameter)
- Available upon request:
 Automatic cylindrical hopper (dia=280 mm), long vegetable hopper (3 tubes) and cabbage hopper.
- Continuous feed model.
- Magnetic safety system and motor brake. Prevents machine from running when lever swings away or is open.

Construction

- Stainless steel motor housing with aluminum basement.
- 1 speed: 330 rpm
- Power: 1500 watts.
- 1 of **650150** (J302N) Stainless steel grating disc 2 mm (dia. 300 mm)
 - Shipping weight: 1.83 kg
- 1 of **650151** (J303N) Stainless steel grating disc 3 mm (dia. 300 mm)
 - **Shipping weight:** 1.82 kg
- 1 of **653172** (C302) Slicing disc 2 mm (dia. 300 mm)
 - **Shipping weight:** 2.11 kg
- 1 of **653173** (C303) Slicing disc 3 mm (dia. 300 mm)
 - **Shipping weight:** 3 kg

APPROVAL:




Vegetable Slicer TR260 vegetable slicer, 1 speed, 1500 watts, 4 discs (2 slicing discs 2-3mm and 2 grating discs 2-3mm).

Optional Accessories			 Disc with corrugated blades 2 mm PNC 653217 (dia. 300 mm) 	
 Feed tray to be combined with cabbage hopper and long 	PNC 650036		 Disc with corrugated blades 3 mm PNC 653218 (dia. 300 mm) 	
vegetable hopperStainless steel grating disc for	PNC 650148		 Disc with corrugated blades 6 mm PNC 653219 (dia. 300 mm) 	
parmesan (dia. 300 mm) • Stainless steel grating disc for	PNC 650149		lever-operated hopper (to change	
knoedeln (dia. 300 mm) • Stainless steel grating disc 2 mm	PNC 650150		the lever-operated hopper into long vegetable hopper)	
(dia. 300 mm) • Stainless steel grating disc 3 mm	PNC 650151		 Stainless steel trolley suitable to hold PNC 653224 one 2/1 GN container (GN container not included) 	
(dia. 300 mm)Stainless steel grating disc 4 mm (dia. 300 mm)	PNC 650152			
Stainless steel grating disc 7 mm (dia. 300 mm)	PNC 650153		used with cabbage feed hopper)	
Stainless steel grating disc 9 mm (dia. 300 mm)	PNC 650154		shaft for stem removal 3 mm (to be used with cabbage feed hopper)	
Stainless steel cabbage grating disc with central shaft for stem removal 7 mm - to be combined with cabbage hopper	PNC 650157		3 3	
Cabbage slicing disc with central shaft for stem removal 1 mm (to be used with cabbage feed hopper)	PNC 653009			
Stainless steel mobile stand. Height: 730 mm	PNC 653017			
 Lever-operated hopper for TR260 (including feed tray) 	PNC 653036			
Automatic feed hopper for TR260Large hopper for TR260, diam.	PNC 653037 PNC 653048			
280mm • Dicing grid 10 mm for TR260	PNC 653051	_		
Dicing grid 16 mm for TR260	PNC 653052			
 Dicing grid 10 mm for TR260 	PNC 653053			
• Dicing grid 25 mm for TR260	PNC 653054			
 Dicing grid 32 mm for TR260 	PNC 653055			
 Slicing disc 2 mm (dia. 300 mm) 	PNC 653172			
 Slicing disc 3 mm (dia. 300 mm) 	PNC 653173			
 Slicing disc 1 mm (dia. 300 mm) 	PNC 653188			
 Slicing disc 5 mm (dia. 300 mm) 	PNC 653189			
 Slicing disc 6 mm (dia. 300 mm) 	PNC 653190			
• Slicing disc 8 mm (dia. 300 mm)	PNC 653191			
• Slicing disc 10 mm (dia. 300 mm)	PNC 653192			
• Slicing disc 16 mm (dia. 300 mm)	PNC 653193			
Shredding disc 2x2 mm (dia. 300 mm)	PNC 653195			
 Shredding disc 3x3 mm (dia. 300 mm) 	PNC 653196			
 Shredding disc 4x4 mm (dia. 300 mm) 	PNC 653197			
 Shredding disc 6x6 mm (can also be used for chips - dia. 300 mm) 	PNC 653198			
 Shredding disc 8x8 mm (can also be used for chips - dia. 300 mm) 	PNC 653199			
 Shredding disc 10x10mm (can also be used for chips - dia. 300 mm) 	PNC 653200			
 Stainless steel disc rack for 300 dia. discs (to be fitted on the mobile stand basement) 	PNC 653212			







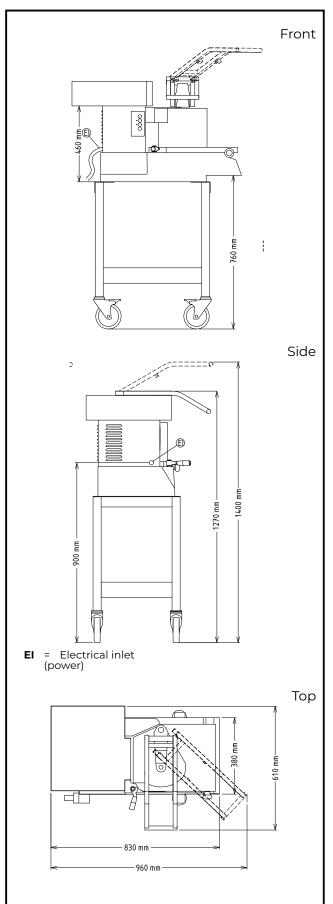

Electric

Supply voltage: 220-240 V/1N ph/50 Hz

Electrical power, max: 1.5 kW Total Watts: 1.5 kW

Capacity:

Performance (up to): 700 kg/Cycle

Key Information:

External dimensions,

Width:

External dimensions, Depth:

External dimensions,

Height:

Shipping weight:

830 mm

1400 mm