


Turbo Liquidizers TBXPro with soup head, 1 speed

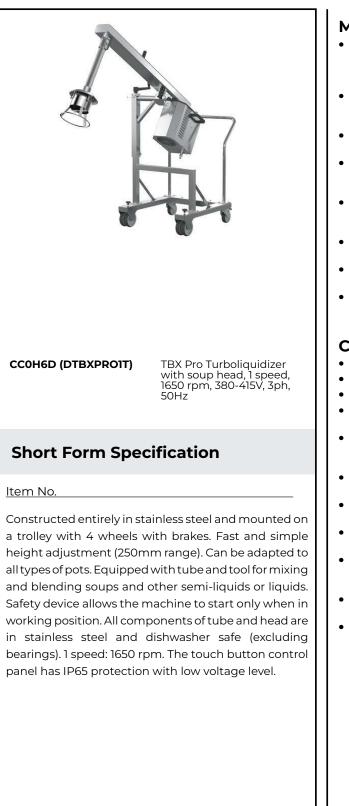

ITEM #	
MODEL #	
NAME #	
SIS #	
<u>AIA #</u>	

Main Features

- Used to mix, blend and emulsify vegetable and soups, fruit and vegetable purées, liquid pastries, sauces and much more directly in cooking pots/containers.
- Appliance equipped with tube and tool for mixing and blending soups and other semiliquids or liquids.
- Equipped with crank handle for fast and easy height adjustment.
- Mixer tube is easily removable without tools and can be dismantled in separate parts: tube, shaft, bearing and rotor.
- All components of tube and head are in stainless steel and dishwasher safe (excluding bearings).
- Safety device allows the machine to start only when it is in a working position.
- Suggested for pots containing up to 700 liters of liquid.
- Turbine accelerates the flow of the liquid over the impeller providing a greater throughput and finer grinding.

Construction

- 1 speed: 1650 rpm.
- 220-240V/50Hz/3-phase available on request.
- Power: 1500 watts.
- Constructed entirely in stainless steel to offer maximum durability.
- Mounted on a mobile stainless steel trolley (4 wheels with brakes). Storage position: fold down motor/arm to save space.
- Trolley with support to store up to two tubes (with assembled tool).
- CE approved (Machine Directive) with CB test report from third party notified body.
- IP65 waterproof control panel, IP23 throughout the entire machine.
- 250mm height adjustment range for the motor body. Different tube lengths allow to adapt to pot depths (see optional accessories).
- All parts in contact with food are conform to 1935/2004/EC.
- Equipped with 8 m power cord without plug.





Components

- 1 OF 602298 (DTBXPROIT) * NOT TRANSLATED *
 Shipping weight: 94 kg
- 1 OF 650172 (HSSTBL) TBX Pro soup head (without - Shipping weight: 2 kg
- 1 OF **650175** (T448) TBX Pro medium tube 448 mm **Shipping weight:** 3 kg

Optional Accessories

 TBX Pro soup grid, hole diam. 8-10 mm 	PNC 650168 🗅
 TBX Pro soup head (without tube) 	PNC 650172 🗖
 TBX Pro puree head for Braising Pan (without tube) 	PNC 650173 🛛
• TBX Pro medium tube 448 mm	PNC 650175 🛛
 TBX Pro long tube 568 mm 	PNC 650176 🛛
 TBX Pro puree head (without tube) 	PNC 650177 🗖
 TBX Pro soup grid, hole diam. 19 mm 	PNC 653507 🗅
• TBX Pro soup head for Braising Pan (without tube)	PNC 653521 🛛
 TBX Pro short tube with deflector, 348 mm (recommended for Braising Pans) 	PNC 653821 🛛




Turbo Liquidizers TBXPro with soup head, 1 speed

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Turbo Liquidizers TBXPro with soup head, 1 speed

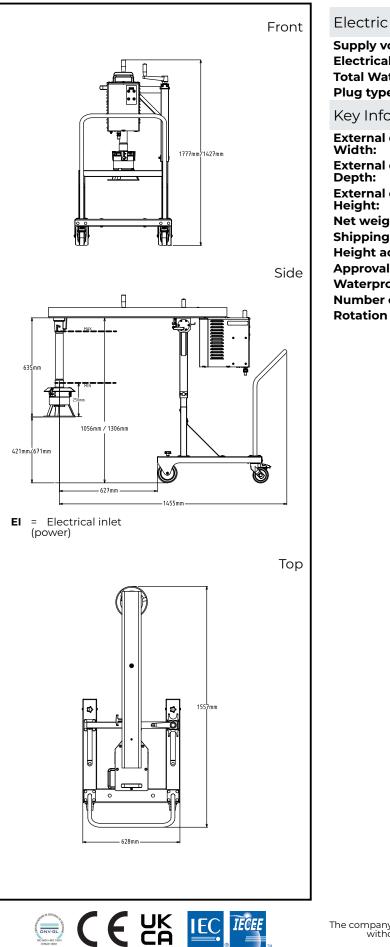

upply voltage: lectrical power, max: otal Watts: lug type:	380-415 V/3 ph/50 Hz 1.5 kW 1.5 kW Cable without plug
Key Information:	
xternal dimensions, Vidth: xternal dimensions, Depth:	628 mm 1556 mm
xternal dimensions, leight: let weight:	1122 mm 80 kg
hipping weight: leight adjustment: .pprovals	1122/1372 mm
Vaterproof index: lumber of speeds: lotation speed:	IP23 1

Turbo Liquidizers TBXPro with soup head, 1 speed

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.