



Planetary Mixers Planetary Mixer, 60 lt

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



600177 (DBMX60B3)

60 lt planetary mixer, bowl detection device and SOLID BPA free safety screen, with mechanical speed variator, timer and bowl lighting. Manual bowl movement. Equipped with stainless steel spiral hook, paddle and whisk

Short Form Specification

Item No. _____

Floor model, suitable for all kneading, blending and whipping operations. Body in non-corrosive material with 18/8 (AISI 302) 60 litre stainless steel bowl. Powerful asynchronous motor (1500 W) with two level mechanical speed variator, with speeds ranging from 1 to 10 (20 to 180 rpm). Plastic safety screen easily removable for cleaning. Control panel with timer and bowl lighting. Manual bowl lifting system. Removable/transparent solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detection device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together.

Supplied with 3 tools: stainless steel spiral kneading hook, cast aluminium paddle and stainless steel wire whisk.

Main Features

- Professional beater mixer for kneading, mixing and whisking all types of food products.
- Delivered with: - Stainless steel spiral kneading hook, Cast aluminum paddle, 302 AISI stainless steel whisk and Mixing Bowl for 60 lt
- Two level mechanical speed variator.
- Maximum capacity (flour, with 60% of hydration) 20 kg, suitable for 400-800 meals per service.
- Waterproof control panel with timer setting knob, speed setting handle and speed display.
- Manual bowl lifting and lighting system.
- Safety device will automatically stop the machine if the screen is lifted.
- Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry preparation.
- Removable chute to add ingredients while working included as standard.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.

Construction

- Body in non-corrosive material.
- Sturdy construction with mechanically welded strong metal frame.
- 302 AISI Stainless steel bowl - 60 lt. capacity.
- Asynchronous motor with high start-up torque.
- 10 speeds from 20 to 180 rpm (planetary movement), to be set while machine is working, according to the tool and the mixture hardness.
- Water protected planetary system (IP55 electrical controls, IP23 overall machine).
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Power: 1500 watts.
- Overload protected planetary system and motor.
- Adjustable feet for perfect stability.
- Plastic safety screen easily removable for cleaning.

Included Accessories

- 1 of Bowl 60 lt mixer PNC 650129
- 1 of Paddle 60 lt PNC 653083
- 1 of Stainless steel (AISI 303) Spiral Hook for 60 lt planetary mixers PNC 653084
- 1 of Whisk 60 lt PNC 653086

Optional Accessories

- 40 lt reduction kit (bowl, spiral hook, paddle, whisk) for 60 lt and 80 lt planetary mixers PNC 650127

APPROVAL: _____



Planetary Mixers Planetary Mixer, 60 lt


- Bowl 60 lt mixer PNC 650129
- Paddle 60 lt PNC 653083
- Stainless steel (AISI 303) Spiral Hook for 60 lt planetary mixers PNC 653084
- Whisk 60 lt PNC 653086
- Reinforced Whisk 60 lt (for heavy duty use) PNC 653097
- Bowl scraper 60 lt PNC 653442
- Bowl trolley for 40/60/80 lt planetary mixers PNC 653585



Planetary Mixers
Planetary Mixer, 60 lt
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2026.02.25

Front

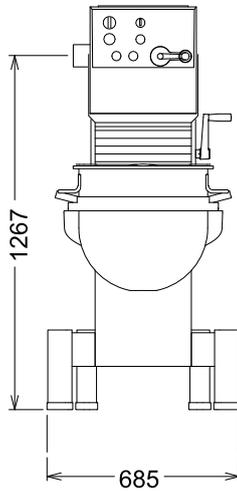

Electric

| | |
|-------------------------------|------------------------------|
| Supply voltage: | 220-240/380-415 V/3 ph/50 Hz |
| Electrical power, max: | 1.54 kW |
| Total Watts: | 1.54 kW |


Capacity:

| | |
|-----------------------------|-------------|
| Performance (up to): | 20 kg/Cycle |
| Capacity: | 60 litres |

Key Information:

| | |
|-------------------------------------|---|
| External dimensions, Width: | 685 mm |
| External dimensions, Depth: | 1087 mm |
| External dimensions, Height: | 1445 mm |
| Shipping weight: | 330 kg |
| Cold water paste: | ISO 9001; ISO 14001 kg with Spiral hook |
| Egg whites: | 100 with Whisk |

Side

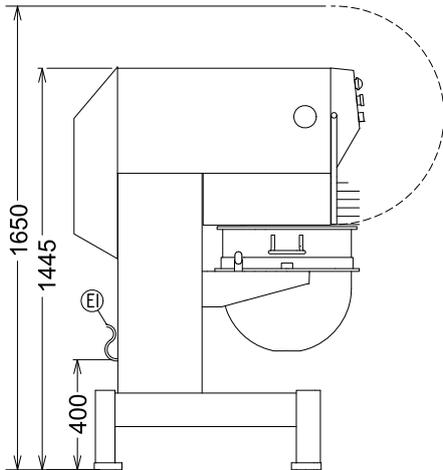

EI = Electrical inlet (power)

Top

