

Vegetable Slicer TRK55 Cutter Slicer - 5.5 LT -

ITEM# MODEL# NAME# SIS# AIA#

positioned. Asynchronous industrial motor for heavy duty and longer life. Flat and waterproof control panel with on/off button. pulse function and variable speed (from 300 to 3700rpm).



600435 (DTRK55YI)

DITO SAMA

Combined cutter/ vegetable slicer, variable speed 300 to 3700 rpm. Supplied with 5,5 lt stainless steel cutter bowl and lever operated feed hopper (CB certification) -Schuko plug

Variable Speed

Short Form Specification

Item No.

3 in 1 machine: cutter, emulsifier and slicer to slice, grate, liquidise, mix and mince in a matter of seconds. Easily change from vegetable slicer to food processor without any tool. All parts in contact with food are removable, dismountable and dw safe. Incly system to change the motor base orientation (20°) to facilitate loading and unloading operations with the vegetable slicer attachment. Vegetable slicer attachment: Universal vegetable slicer offering about 80 different types of cuts. Long vegetable hopper (55,5mm diameter) integrated in the wide 3/4 moon stainless steel round hopper (215cm²). User-friendly stainless steel lever (better pressure control, with less effort for arms and shoulder), designed for right and left handed users. High discharge zone (up to 20cm) for GN containers. Automatic start/stop function will stop the machine when the lever hopper is lifted and will restart automatically when lowered. Cutter-mixer: Stainless steel 5,5 litre bowl with unique design for mixing both large or small quantities. Unique high chimney increases the real capacity of the bowl (use up to 75% of nominal capacity). Transparent lid to check consistency of food and to $eventually adding redients without having to open the {\it lid}. Hinged cover,$ when lifted, remains open to permit a fast and easy check of preparation. Ergonomic and easily dismountable scraper, in heavy duty composite material, for better homogenization. Micro toothed blades in 420 AISI stainless steel. Multiple safety devices ensure the machine will only operate when the cover is properly closed and all parts are correctly

APPROVAL:



Main Features

- 3 in 1 machine: cutter, emulsifier and vegetable slicer to slice, grate, liquidise, mix and mince in a matter of seconds.
- Incly system to incline motor base at 20° to better fit the vegetable slicer attachment.
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Long vegetables round hopper integrated in the feed arm, 3/4 moon roundish hopper to limit pre cutting operations.
- Emulsifier function (scraper) included as standard.
- Base fixed cover for a better handling.
- Red OFF, green ON buttons.
- Pulse function for coarse chopping.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Automatic restart of the machine with the 3/4 moon shaped pusher in position.
- Magnetic safety system and motor brake. Prevents machine from running when vegetable preparation lever and/or hopper are lifted or when cutter lid is not properly closed.
- Automatic speed limitation according to the selected function (slicer or cutter).
- Complete and wide selection of blades and grids available (diam. 205 mm).
- Delivered with:
 - -Stainless steel lever operated feed hopper
 - -5,5 It stainless steel cutter bowl, transparent lid, scraper and microtoothed blade rotor
- · Capacity:
 - -vegetable slicer productivity 550 kg/h, suitable for 100-400 meals for table service, up to 800 meals for catering service
 - -cutter mixer working capacity from 100 g to 2,5 kg, for 50-100 meals per service

Construction

- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- All blades (available on request) are made in stainless steel and dishwasher safe.
- Stainless steel bowl has a high chimney to ensure high productivity also when processing liquids.
- Feeding arm and hopper are made entirely in stainless steel. Aluminum motor housing.
- Vegetable cutting at 4 speeds up to 800 rpm. Food processing at 10 variable speeds: 300-3700 rpm.
- IP24 throughout entire machine.
- Power: 1.3 HP.
- IPX5 (IP55) waterproof, flat, touch-control panel.
- Compact and portable design.
- Improved ventilation system to manage smoothly heavy duty use.
- Main on/off switch for added safety.
- Improved incly system for better stability.
- Improved fixing of long vegetable hopper pusher.
- Main switch ON/OFF on the back of the appliance.





Vegetable Slicer TRK55 Cutter Slicer - 5.5 LT -Variable Speed

Included Accessories				Bistrot Pack-set stainless steel discs (2mm and 5mm slicing pressing	PNC 650092	
• 1 of Lid and bowl scraper for 5,5 lt cutter mixer	PNC 650102		•	disc, 2mm grating disc) Lid and bowl scraper for 5,5 lt cutter	PNC 650102	
1 of Stainless steel bowl for 5,5 lt cutter mixer	PNC 653590			mixer Set of 3 stainless steel discs for Pizza	PNC 650107	_
1 of Ejector disc1 of Smooth blade rotor for 5,5 lt	PNC 653772 PNC 653879			(2mm and 4mm pressing/slicing discs with S-blades, 7mm grating disc)	FINC 030107	_
cutter mixer Optional Accessories				Cleaning tool for TRS, TRK & TR210 5-8-10 mm dicing grids	PNC 650110	
Stainless steel shredding disc with S-blades 4x4 mm	PNC 650077		•	Dicing set 10x10x10mm (10mm aluminum slicing pressing disc with	PNC 650112	
 Stainless steel shredding disc with S-blades 6x6 mm (can also be used for French fries) 	PNC 650078		•	205mm diam. and 10mm grid) Gastronomy Pack-set discs (2mm, 5mm and 10mm slicing pressing	PNC 650113	
 Stainless steel shredding disc with S-blades 8x8 mm (can also be used for French fries) 	PNC 650079		:	discs, 2mm grating disc, 4x4mm shredding disc, 10x10mm dicing grid) and grid cleaning tool		
 Stainless steel shredding disc with S-blades 10x10 mm (can also be used for French fries) 	PNC 650080		;	Set of 7 discs (2mm, 5mm and 10mm slicing pressing discs, 2mm and 7mm grating discs, 4x4mm shredding disc, 10x10mm dicing grid)	PNC 650114	
 Stainless steel pressing/slicing disc with S-blades 0,6 mm (can be used for slicing or combined 	PNC 650081		• ;	and grid cleaning tool Aluminum pressing/slicing disc with straight blades 10 mm - for dicing	PNC 650115	
with grids)Stainless steel pressing/slicing	PNC 650082		• ,	Aluminum pressing/slicing disc with straight blades 8 mm - for dicing	PNC 650116	
disc with S-blades 1 mm (can be used for slicing or combined with grids)			• :	Stainless steel shredding disc with S- blades 2x8 mm	PNC 650158	
Stainless steel pressing/slicing disc with S-blades 2 mm (can be)	PNC 650083			Stainless steel shredding disc with S-blades 2x10 mm	PNC 650159	
used for slicing or combined with grids)			,	Stainless steel pressing/slicing disc with S-blades 10 mm (can be used for	PNC 650160	
 Stainless steel pressing/slicing disc with S-blades 3 mm (can be used for slicing or combined with grids) 	PNC 650084		• ;	slicing or combined with grids) Stainless steel pressing/slicing disc with S-blades 12 mm (can be used for slicing or combined with grids)	PNC 650161	
 Stainless steel pressing/slicing disc with S-blades 4 mm (can be used for slicing or combined with grids) 	PNC 650085		,	Stainless steel pressing/slicing disc with corrugated S-blades 8 mm (can be used for slicing or combined with grids)	PNC 650162	
 Stainless steel pressing/slicing disc with S-blades 5 mm (can be used for slicing or combined with grids) 	PNC 650086		,	Stainless steel pressing/slicing disc with corrugated S-blades 10 mm (can be used for slicing or combined with grids)	PNC 650164	
 Stainless steel pressing/slicing disc with S-blades 6 mm (can be used for slicing or combined with 	PNC 650087		• !	Stainless steel pressing/slicing disc with S-blades 13 mm (can be used for slicing or combined with grids)	PNC 650165	
grids) • Stainless steel pressing/slicing	PNC 650088			Stainless steel shredding disc with S-blades 2x2 mm	PNC 650166	
disc with S-blades 8 mm (can be used for slicing or combined with grids)				Stainless steel shredding disc with S- blades 3x3 mm		
Stainless steel pressing/slicing disc with corrugated S-blades 2 mm (can be used for slicing or	PNC 650089			Set of 4 stainless steel discs (2mm and 5mm slicing pressing discs, 2mm and 7mm grating discs)	PNC 650178	
combined with grids) • Stainless steel pressing/slicing	PNC 650090		•	Stainless steel work table with folding shelves and disk rack for TRK, TRS and TR210 table top models	PNC 653283	
disc with corrugated S-blades 3 mm (can be used for slicing or			•	Dicing grid 5x5 mm	PNC 653566	
combined with grids)		_		Dicing grid 8x8 mm	PNC 653567	
Stainless steel pressing/slicing disc with corrugated S-blades 6	PNC 650091			Dicing grid 10x10 mm	PNC 653568	
disc with corrugated S-blades 6 mm (can be used for slicing or combined with grids)				Dicing grid 12x12 mm Dicing grid 20x20 mm	PNC 653569 PNC 653570	






Vegetable Slicer TRK55 Cutter Slicer - 5.5 LT -Variable Speed

• Grid for	chips 6x6 mm	PNC	653571	
• Grid for	chips 8x8 mm	PNC	653572	
• Grid for	chips 10x10 mm	PNC	653573	
• Stainles mixer	ss steel bowl for 5,5 lt cutter	PNC	653590	
• Suppor and 205	t for 1 disc, diam. 175mm 5mm	PNC	653632	
• Ejector	disc	PNC	653772	
• Stainles	ss steel grating disc 2 mm	PNC	653773	
• Stainles	ss steel grating disc 3 mm	PNC	653774	
• Stainles	ss steel grating disc 4 mm	PNC	653775	
• Stainles	ss steel grating disc 7 mm	PNC	653776	
• Stainles	ss steel grating disc 9 mm	PNC	653777	
	ss steel grating disc for In and bread	PNC	653778	
	ss steel grating disc for san and bread	PNC	653779	
 Smooth mixer 	n blade rotor for 5,5 lt cutter	PNC	653878	
 Smooth mixer 	n blade rotor for 5,5 lt cutter	PNC	653879	
	ooth blade rotor (emulsifier) t cutter mixer	PNC	653880	





Vegetable Slicer TRK55 Cutter Slicer - 5.5 LT -Variable Speed

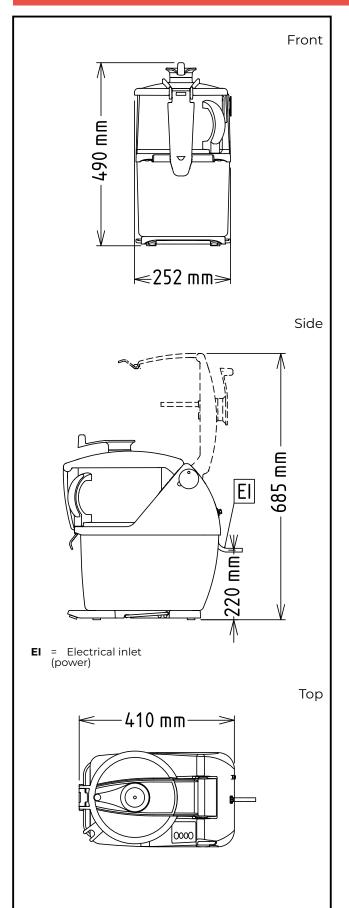

Electric Supply voltage: 200-240 V/1N ph/50/60 Hz Electrical power, max: 1.3 kW **Total Watts:** 1.3 kW Capacity: Performance (up to): 550 kg/hour Capacity: 5.5 litres Key Information: External dimensions, Width: 252 mm External dimensions, 485 mm Depth: External dimensions, Height: 505 mm **Shipping weight:** 30.5 kg



