ITEM #

MODEL #

NAME #

SIS #

AIA #

# Spin Dryers
# Vegetable Dryer, 10 Kg with resin basket



| | |
|---|---|
| **603651 (DELX65F5)** | 10 kg vegetable dryer with 65 lt basket volume. Spin drying automatic cycle. Plastic basket |

## Short Form Specification

Item No.

Body and panels in stainless steel, lid in plastic material. Removable resin basket (65 litres). Flat and waterproof touch button control panel. Two cycles: "automatic" which alternates rotation with several sudden stops (for all vegetables); "manual" thanks to the adjustable timer up to 59 minutes (for delicate vegetables). Residual water is eliminated through an outlet pipe. Equipped with self-braking motor which stops the machine after the set drying time or if the lid is open during the cycle. IP55 and IP34 protection. V-ribbed belt drive. Basket rotation speed: 330 rpm. Load capacity: 10 kg, - 18 lettuce heads.

APPROVAL:

## Main Features

- Spin drying automatic cycle with short drying time (1 to 2 minutes).
- "Automatic" cycle alternates rotation to several sudden stops, suitable for all vegetables.
- "Manual" cycle uses adjustable timer up to 59 minutes, to be used for delicate vegetables.
- Outlet pipe eliminates residual water.
- Timer with digital display and countdown.
- Heavy vegetables load per cycle: 10 Kg
- Light vegetables load per cycle: 18 units of lettuce heads.
- Safety device stops the machine when the cover is opened.
- Electrical braking system to stop basket rotation in a matter of seconds at the end of the cycle or when lid is opened.

## Construction

- Stainless steel body and panels.
- Removable resin basket, 65 liters capacity.
- Basket rotates at approximately 330 rpm.

## Included Accessories


- 1 of Additional plastic basket for 10 kg vegetable dryer — PNC 653304

## Optional Accessories


- Stainless steel basket with aluminium base for 10 kg vegetable dryer — PNC 653303 ❑
- Additional plastic basket for 10 kg vegetable dryer — PNC 653304 ❑

# Spin Dryers
# Vegetable Dryer, 10 Kg with resin basket

Front

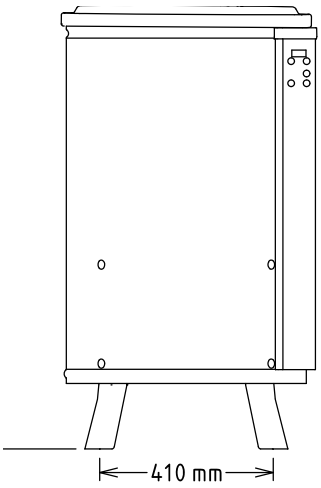



Side

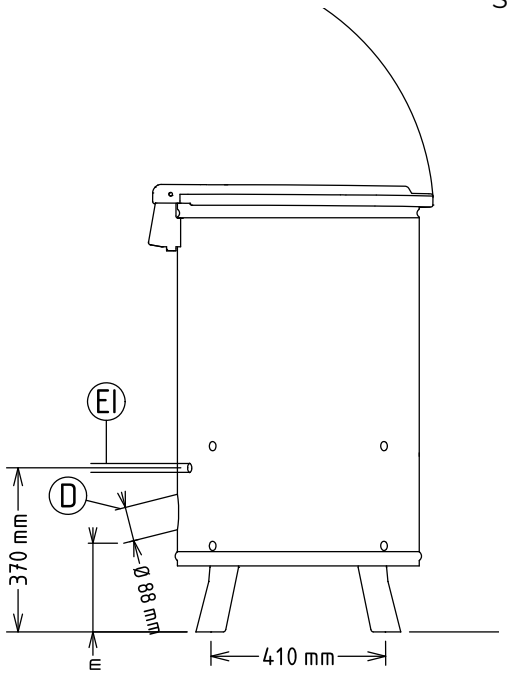


**D** = Drain
**EI** = Electrical inlet (power)

Top



## Electric

| | |
|---|---|
| **Supply voltage:** | 220-240/380-415 V/3 ph/50 Hz |
| **Electrical power, max:** | 0.75 kW |
| **Total Watts:** | 0.75 kW |

## Key Information:

| | |
|---|---|
| **External dimensions, Width:** | 578 mm |
| **External dimensions, Depth:** | 639 mm |
| **External dimensions, Height:** | 1005 mm |
| **Shipping weight:** | 71 kg |
| **Well Capacity:** | 65 lt |
| **Usable well capacity:** | 65 lt |
| **Load per cycle - light vegetables:** | 18 UNITS OF LETTUCE |
| **Load per cycle - heavy vegetables:** | ISO 9001; ISO 14001 |



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.11.20