ITEM #

MODEL #

NAME #

SIS #

AIA #

Planetary Mixers
Planetary Mixer, 60 lt with Hub

600179 (DBMX60AB3) 60 lt planetary mixer, bowl detection device and SOLID BPA free safety screen, with mechanical speed variator, timer and bowl lighting. Manual bowl movement. Equipped with stainless steel spiral hook, paddle and whisk. With H type accessory hub

Short Form Specification

Item No.

Floor model, suitable for all kneading, blending and whipping operations. Body in non-corrosive material with 18/8 (AISI 302) 60 litre stainless steel bowl. Powerful asynchronous motor (1500 W) with two level mechanical speed variator, with speeds ranging from 1 to 10 (20 to 180 rpm). Plastic safety screen easily removable for cleaning. Control panel with timer and bowl lighting. Manual bowl lifting system. Equipped with accessory drive hub type H (accessories are not included). Removable/transparent solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detection device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Supplied with 3 tools: stainless steel spiral kneading hook, cast aluminium paddle and stainless steel wire whisk.

APPROVAL:

Main Features

- Professional beater mixer for kneading, mixing and whisking all types of food products.
- Delivered with:
  - Stainless steel spiral kneading hook, Cast aluminium paddle, 302 AISI stainless steel whisk and Mixing Bowl for 60 lt
  - Accessory drive hub (accessories are not included)
- Two level mechanical speed variator.
- Maximum capacity (flour, with 60% of hydration) 20 kg, suitable for 400-800 meals per service.
- Waterproof control panel with timer setting knob, speed setting handle and speed display.
- Manual bowl lifting and lighting system.
- Safety device will automatically stop the machine if the screen is lifted.
- Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry preparation.
- Removable chute to add ingredients while working included as standard.
- Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together.

Construction

- Body in non-corrosive material.
- Sturdy construction with mechanically welded strong metal frame.
- 302 AISI Stainless steel bowl - 60 lt. capacity.
- Asynchronous motor with high start-up torque.
- 10 speeds from 20 to 180 rpm (planetary movement), to be set while machine is working, according to the tool and the mixture hardness.
- Water protected planetary system (IP55 electrical controls, IP23 overall machine).
- Planetary movement based on self lubricating gears, eliminating any risk of leaks.
- Power: 1500 watts.
- Overload protected planetary system and motor.
- Adjustable feet for perfect stability.
- Plastic safety screen easily removable for cleaning.

Included Accessories

- 1 of BOWL FOR 60LT MIXER PNC 650129
- 1 of PADDLE FOR 60LT MIXER PNC 653083
- 1 of DOUGH HOOK FOR 60LT MIXER PNC 653084
- 1 of WHISK FOR 60LT MIXER PNC 653086

Optional Accessories

- 40L BOWL,HOOK,PADDLE, WHISK FOR 60L MIXER PNC 650127 ❑

• BOWL FOR 60LT MIXER	PNC 650129	❑
• PADDLE FOR 60LT MIXER	PNC 653083	❑
• DOUGH HOOK FOR 60LT MIXER	PNC 653084	❑
• WHISK FOR 60LT MIXER	PNC 653086	❑
• REINFORCED WHISK FOR 60LT MIXER	PNC 653097	❑
• PUREE STRAINER FOR H HUB WITH 3 GRIDS	PNC 653187	❑
• VEGETAB.CUTTER H HUB+ EJECTOR-DISCONNECT.	PNC 653225	❑
• BOWL SCRAPER 60LT	PNC 653442	❑
• BOWL TROLLEY-40/60/80LT PLANETARY MIXERS	PNC 653585	❑
• EXT.SUPPORT(ALUM)-MEAT MINCER 70MM-H HUB	PNC 653720	❑
• ALUM.MEATMINCER KIT 70MM-H HUB-ENTERPRIS	PNC 653721	❑
• S/S MEATMINCER KIT 70MM-H HUB-ENTERPRISE	PNC 653722	❑
• S/S MEATMINCER KIT 70MM-H HUB-½ UNGER	PNC 653723	❑
• EXT.SUPPORT(ALUM)-MEAT MINCER 82MM-H HUB	PNC 653724	❑
• S/S MEATMINCER KIT 82MM-H HUB-ENTERPRISE	PNC 653725	❑
• ALUM.MEATMINCER KIT 82MM-H HUB-ENTERPRIS	PNC 653726	❑
• S/S MEATMINCER KIT 82MM-H HUB-½ UNGER	PNC 653727	❑

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Front

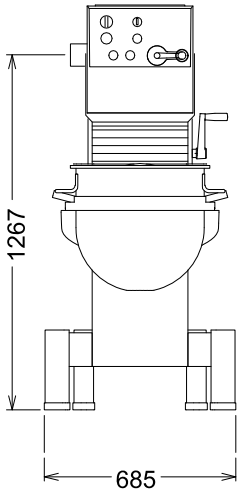

Side

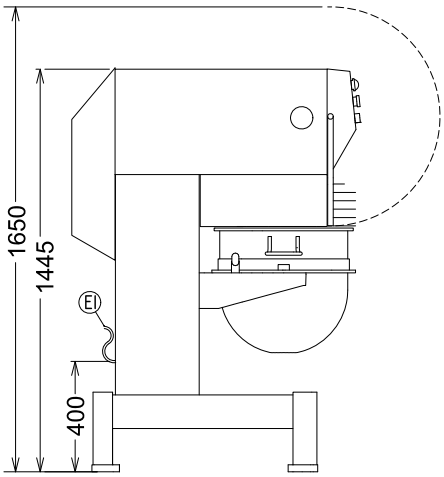

EI = Electrical inlet (power)

Top

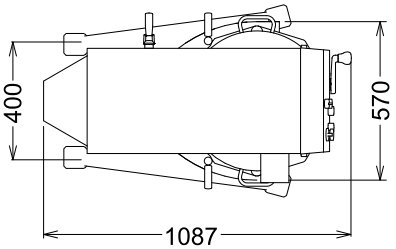

Electric

Supply voltage:	220-240/380-415 V/3 ph/50 Hz
Electrical power max.:	1.54 kW
Total Watts:	1.54 kW

Capacity:

Performance (up to):	20 kg/Cycle
Capacity:	60 litres

Key Information:

External dimensions, Width:	685 mm
External dimensions, Depth:	1087 mm
External dimensions, Height:	1445 mm
Shipping weight:	337 kg
Cold water paste:	20 kg with Spiral hook
Egg whites:	100 with Whisk

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.10.16