

Vacuum Packers

Mobile Vacuum Packer -20 m³/h inert gas

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



600044 (EVP45FG)

Mobile vacuum packer (inert
gas) 20 m³/h

Short Form Specification

Item No. _____

Floor standing model on wheels. Constructed in 304 AISI stainless steel. Domed transparent Plexiglas lid. Pressure chamber with rounded corners. Equipped with inert gas inlet. Digital control panel for programming and storing of up to 9 operating programs (including the external vacuum one). Mechanical "soft air" device allows the controlled re-admission of air into the chamber. Basic display shows the selected program and related settings, including alarm messages if errors are detected by the electronic board. Electronic board detects electronic malfunctions, color and oil level as well as other failures in the vacuum packing process. Safety system protects the machine in case of sealing bar overheating. Adapter for vacuum packing in external containers (optional accessory). Sealing bar length 450mm.

Main Features


- Digital control panel allows programming and storing of up to 9 operating programs for a better vacuum pressure and heat seal times.
- Microprocessor automatically controls the exact percentage of negative pressure needed for all the air to be removed.
- Warning light to indicate malfunctioning in the vacuum packing process.
- Unit equipped with inert gas.
- "Soft air" device allowing to control the re-admission of air into the chamber.
- Sealing bar 450 mm.
- Free-standing appliance mounted on 4 castors.
- Can be equipped with an adapter (available as optional accessory), allowing the vacuum process to take place in external containers or appliances by connecting the external container's pipe to the air sucking valve.

Construction


- Entirely constructed in 304 AISI stainless steel.
- Unit to have a domed transparent Plexiglas lid.
- Pressure chamber with rounded corners.

APPROVAL: _____

Front

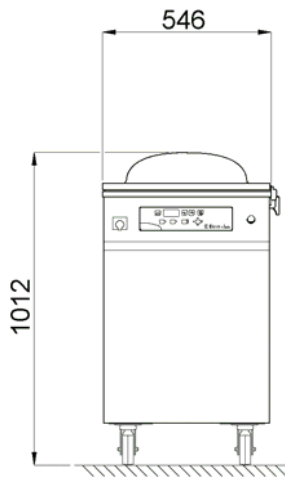


Side

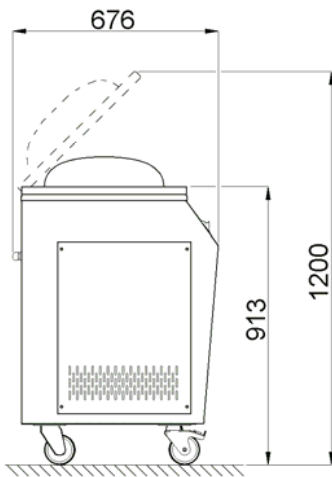

EI = Electrical inlet (power)

Other

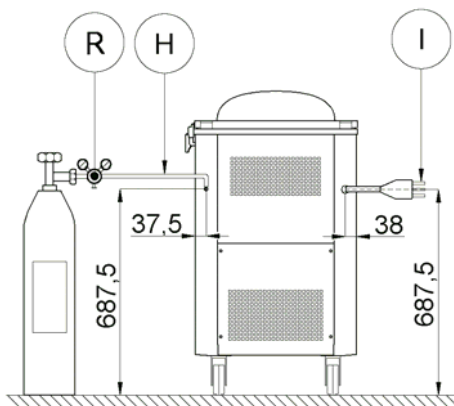

Electric

Supply voltage:	230 V/1N ph/50/60 Hz
Total Watts:	1.1 kW

Key Information:

Chamber width:	456 mm
Chamber depth:	466 mm
Chamber height:	218 mm
Sealing bar length:	450 mm
External dimensions, Width:	550 mm
External dimensions, Depth:	680 mm
External dimensions, Height:	1013 mm
Net weight (kg):	101
Pump:	20 m ³ /h