

Modular Preparation 1600 mm Work Top with Upstand

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



121145 (TPLA16A)

 Work top with upstand
1600mm

Short Form Specification

Item No.

The 40mm high worktop in 304 AISI stainless steel, incorporates an 18mm under panel made of sound deadening material. Front and rear longitudinal stainless steel c-channel reinforcement. Special shaped front profile, without burrs, to avoid water leakage. Fully welded and shapely polished corners. 100mm boxed heavy duty splash back with a 45° top angle and fully welded sides. Work tops can be mounted on brackets, legs or bases in order to obtain a work height of 900mm.

Main Features

- Special shaped front and rear profiles without burrs to avoid water leakage on modules below.
- Extremely easy to clean thanks to the large and smooth seamless surface with Scotch-Brite finishing.

Construction

- 304 AISI stainless steel worktop (CrNi 18/10) 40 mm high, 15/10 (16 gauges) thickness.
- 18mm under panel made of sound deadening material according to E1 European specifications.
- Front and rear lengthwise stainless steel c-channel reinforcement, 15/10 (16 gauges).
- For a work height of 900 mm, worktops can be mounted on: solid bracket, solid bracket plus 50x50mm legs, 710 mm ambient, hot, refrigerated or freezer units with hinged doors or telescopic drawers, placed on oversized (65x65mm) or 150mm high feet (0/+90mm adjustable in height).
- Fully welded and polished corners.
- 100 mm boxed heavy duty splashback with a 45° degrees top angle, folded directly from the worktop, has fully welded sides and rear part completely covered by stainless steel profile to avoid water spillage on modules below.

Optional Accessories

- | | |
|------------------------------------------------------------------|-------------------------------------|
| • Drop-in soaking unit
800x500x350mm | PNC 855216 <input type="checkbox"/> |
| • Single plastic drain syphon 1,5
" for work tables with bowl | PNC 855306 <input type="checkbox"/> |
| • Drop-in bowl and right-hand
drainage 400x400x200mm | PNC 855800 <input type="checkbox"/> |
| • Drop-in bowl and right-hand
drainage 600x500x250mm | PNC 855801 <input type="checkbox"/> |
| • Side upstand, h=100mm | PNC 855802 <input type="checkbox"/> |
| • Bowl skirting (400x400x200) for
cantilever execution | PNC 855806 <input type="checkbox"/> |
| • Bowl skirting (600x500x250) for
cantilever execution | PNC 855807 <input type="checkbox"/> |
| • Bowl skirting (2x600x500x250)
for cantilever execution | PNC 855808 <input type="checkbox"/> |
| • Stainless steel square tube wall
bracket | PNC 855814 <input type="checkbox"/> |
| • Stainless steel wall bracket with
squared leg 50x50mm | PNC 855815 <input type="checkbox"/> |
| • Drop-in bowl and left-hand
drainage 400x400x200mm | PNC 855816 <input type="checkbox"/> |
| • Drop-in bowl and left-hand
drainage 600x500x250mm | PNC 855817 <input type="checkbox"/> |
| • False bottom for right hand
600x500mm bowl | PNC 895100 <input type="checkbox"/> |
| • False bottom for left hand
600x500mm bowl | PNC 895110 <input type="checkbox"/> |

APPROVAL: _____




Electrolux
PROFESSIONAL

Modular Preparation 1600 mm Work Top with Upstand

Key Information:

External dimensions, Width:	
121145 (TPLA16A)	1600 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	140 mm
Upstand Dimensions, Height:	100 mm
Upstand Dimensions, Radius:	90°
Worktop thickness:	40 mm
Net weight:	53 kg

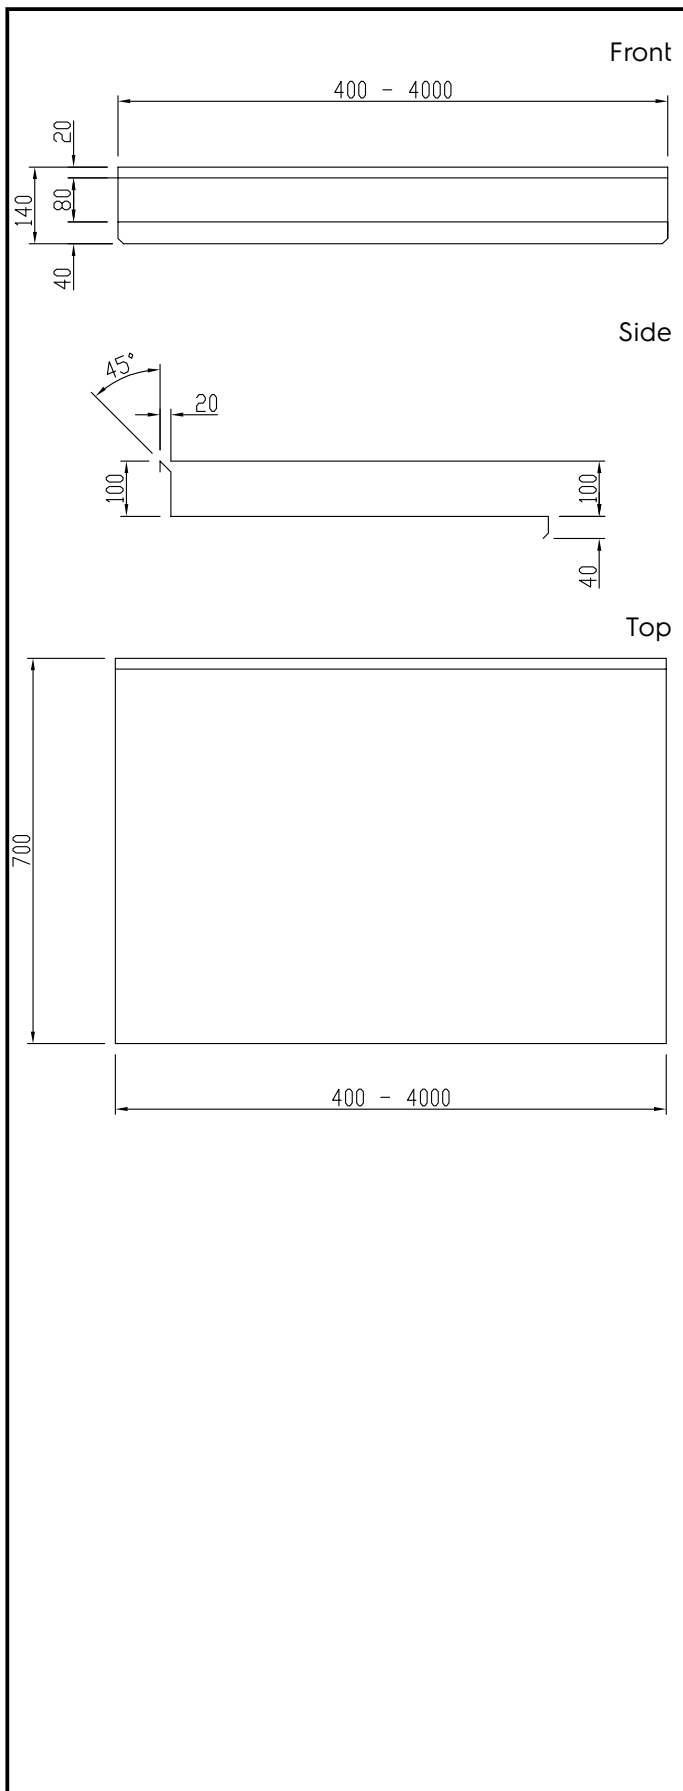

Modular Preparation
1600 mm Work Top with Upstand

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.06.30